

# HOWARD



**Power range:  
15 - 40 HP.**

**Two versions with 4  
or 6 blades per disc.**

**Side gear drive.**

**Light and sturdy  
monobloc  
construction.**

**Working width:  
90 - 155 cms.**



This HR 12 model is with top mast.

## Rotavator HR12.

# Rotavator HR 12.



The HR 12 series has been designed for low horsepower tractors, by obtaining the best weight - strength relationship to get a light machine capable of handling heavy forces. The HR 12 Rotavator is ideal for various crops, especially:

- Asparagus
- Vineyards
- Nurseries
- Greenhouses

This model is well reinforced to handle intense use on all kinds of fields.

## Features

Universal joint at 540 rpm.

Linkage Cat.I.

Adjustable by depth control skids.

Offsetable by moveable mounting plate.

Rotor speed: 230 rpm.

Side gear drive.

Versions with 4 or 6 blades (Ref. 665049/50).

## Optional Equipment


Safety clutch.

Reverse rotation rotor.

Top mast (standard for USA).

Side tine.

Displaced gearbox for working in fruit trees.

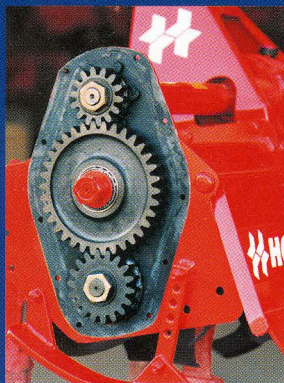

Detail of side drive gears.



HR 12 model, standard version.



HR 12 model with top mast.



Moveable mounting plate for mounting on any tractor.

Model type	Working width cm.	Number of blades	Overall width cm.	Weight kg.	Power
HR12 / 4 / 090	90	14	107	170	15-30
HR12 / 4 / 100	103	16	115	175	15-30
HR12 / 4 / 115	115	18	130	180	20-35
HR12 / 4 / 125	128	20	140	185	25-35
HR12 / 4 / 140	140	22	155	190	30-40
HR12 / 4 / 155	153	24	168	200	35-40
HR12 / 6 / 090	90	21	107	175	15-30
HR12 / 6 / 100	103	24	115	180	15-30
HR12 / 6 / 115	115	27	130	185	20-35
HR12 / 6 / 125	128	30	140	190	25-35
HR12 / 6 / 140	140	33	155	195	30-40
HR12 / 6 / 155	153	36	168	205	35-40



HOWARD ROTAVATOR, S.A.

P. O. Box 246

08400 GRANOLLERS - Barcelona

SPAIN

Phone (3) - 849 26 22 - 849 28 78

Fax (3) - 849 35 77

HOWARD, is committed to constantly improving its products and may modify the characteristics and measures stated herein without prior warning.

Importer / Dealer: