


THIS DOCUMENT CONTAINS MATERIAL AND/OR INFORMATION, WHICH IS THE PROPERTY OF AMERICAN STANDARD INC. (A DELAWARE CORPORATION) AND SUPPLIED ONLY ON CONFIDENTIAL BASIS. NO TRANSMITTAL OR DISCLOSURE SHALL BE MADE TO ANY PERSON, FIRM OR CORPORATION WITHOUT PRIOR WRITTEN APPROVAL OF AMERICAN STANDARD INC.

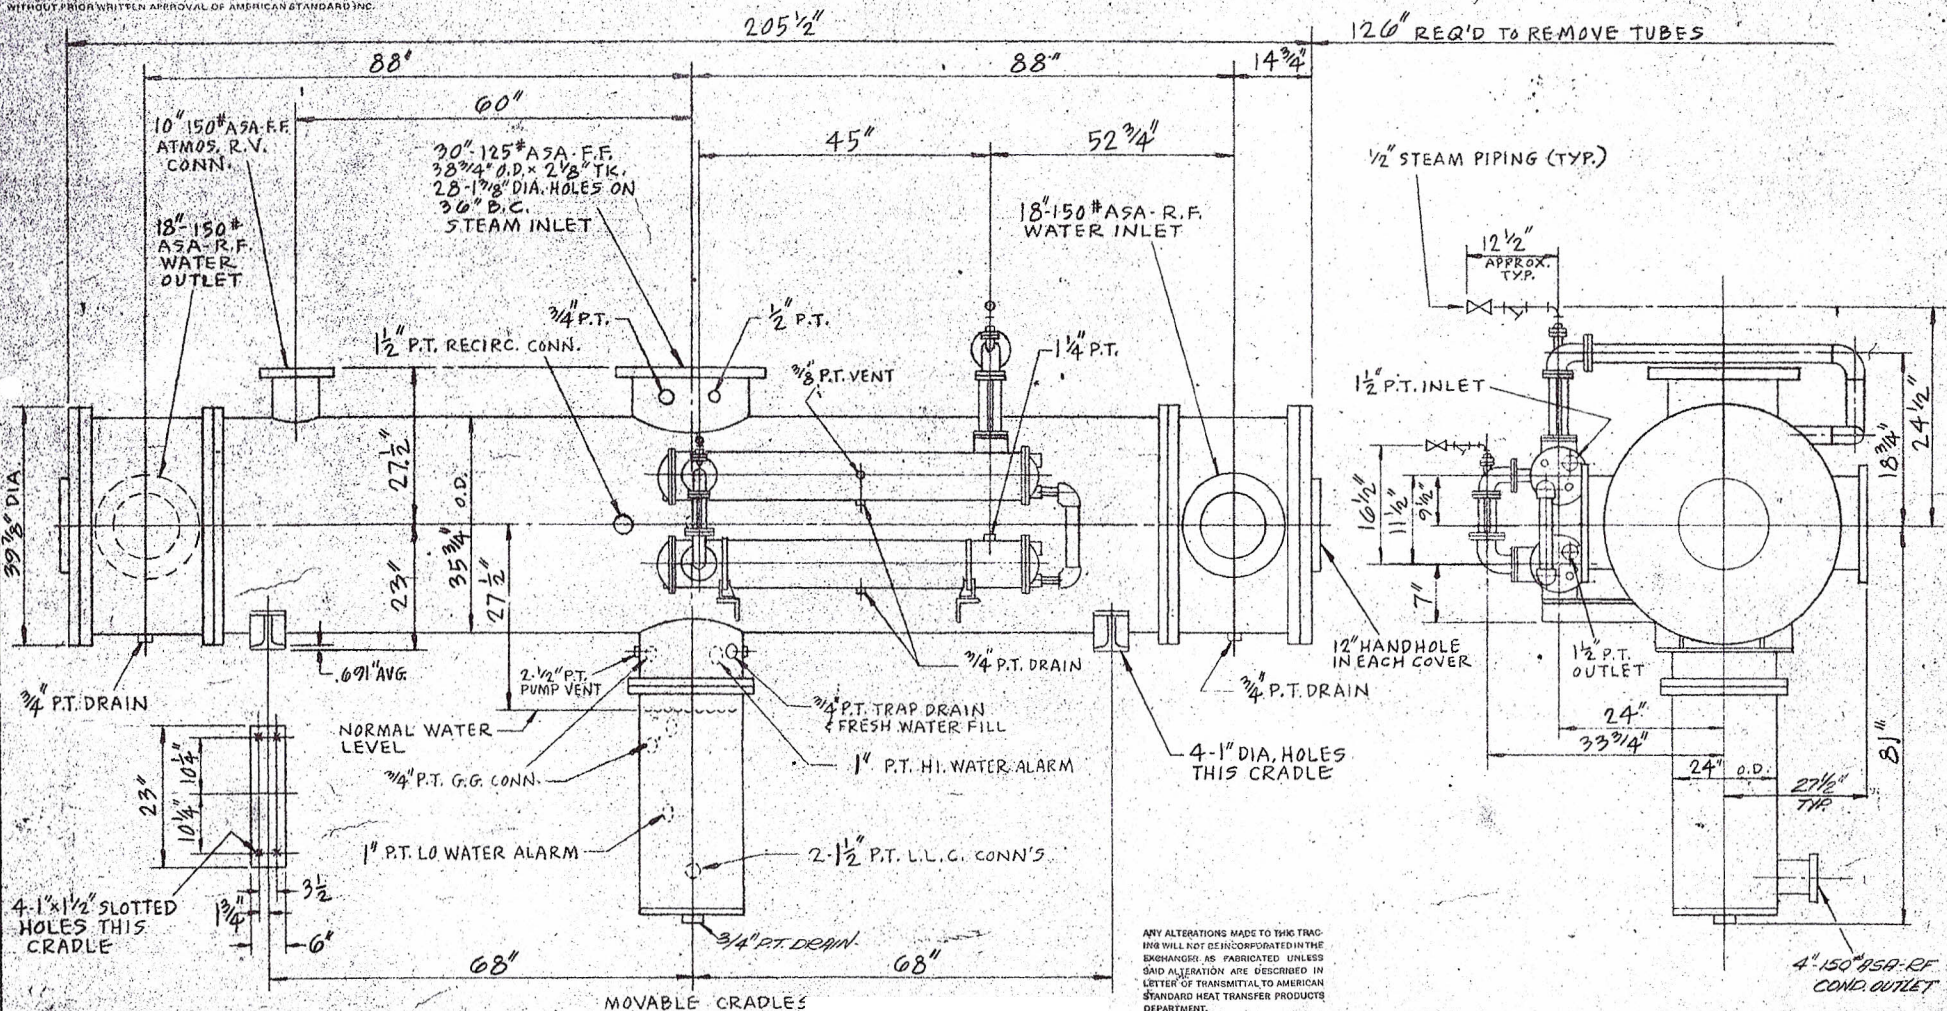

NOTE:

1. CUSTOMERS CONNECTING PIPING MUST BE DESIGNED & SUPPORTED SO AS NOT TO INCUR STRAINS ON THE EQUIPMENT.
2. STEAM PRESSURE FOR AIR REMOVAL IS 150 P.S.I.G., 500°F
3. AIR REMOVAL IS MOUNTED, MAY BE SHIPPED SEPARATELY
4. HOTWELL MAY BE SHIPPED SEPARATELY.
5. CUSTOMER TO LOCATE COND. PUMPS FOR MIN. OF 66" SUBMERGANCE
6. FURN. WITH ZINCS

CERTIFIED FOR CONSTRUCTION

DATE 11.17.72

PURCHASER YORK DIVISION-BORG-WARNER

P. O. 72-730, 068, 069 & 070

AMERICAN STANDARD
HEAT TRANSFER PRODUCTS DEPT.

CON'T 6-61250

BY H. WARNER

APPROVED ☒
APPROVED EXCEPT AS NOTED ☐
~~NOT APPROVED~~ ☐
APPROVAL OF THIS DRAWING DOES NOT VOID THE REQUIREMENTS
OF CONFORMANCE WITH PLANS AND SPECIFICATIONS.

B. SEGALL JR.
Consulting Engineer
BY *[Signature]* DATE *2/7/73*

	D.P.	T.P.	TEMP. °F
SHELL SIDE	15 # 30" H ₂ O	FLOODED	150
TUBE SIDE	75 #	80 #	150

MAIN CONDENSER

	D.P.	T.P.	TEMP. °F.
SHELL SIDE	30" ^{HGT} VAC.	20	212
TUBE SIDE	150#	225#	150

INTER & AFTER CONDENSER

[illegible]

6-61250-18

A.01.03.20.0