

DECOR SCHEDULE COLOR SCHEME: ELEMENT

ITEM	SYMBOL	CHOICE	SPECIFICATIONS	REMARKS
PAINT 1	PL-1	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 7035 COLOR: AESTHETIC WHITE	EG-SHELLSHEEN
PAINT 2	PL-2	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 6711 COLOR: PARAKEET	EG-SHELLSHEEN
PAINT 3	PL-3	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 6382 COLOR: CEREMONIAL GOLD	EG-SHELLSHEEN
PAINT 4	PL-4	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 6642 COLOR: RHUMBA ORANGE	EG-SHELLSHEEN
PAINT 5	PL-5	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 7522 COLOR: MEADOWLARK	EG-SHELLSHEEN
PAINT 9	PL-9	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: 7006 COLOR: EXTRA WHITE	EG-SHELLSHEEN
PAINT 10	PL-10	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: B42W12 COLOR: EG-SHEL WHITE WATERBORNE ACRYLIC DRYFALL	EG-SHELLSHEEN
PAINT 12	PL-12	REQUIRED	"ANYTIME PURPLE" (CUSTOM)	SEMI GLOSS
PAINT 13	PL-13	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: SW 6258 COLOR: TRICORN BLACK	INSPIRATION WALL BASE COAT FOR PDE-1 DRY ERASE COATING
DRY ERASE	PDE-1	REQUIRED	MANUFACTURER: SHERWIN WILLIAMS NUMBER: KB65C2000 KIT COLOR: DRY ERASE COATING	INSPIRATION WALL FINISH COAT APPLY OVER PL-13 PAINT
CARPET	CA-1	REQUIRED	MANUFACTURER: PATCRAFT STYLE: DAZZLE TILE 1019 NUMBER/COLOR: 00512 EXQUISITE	QUARTER TURN INSTALLATION
RUBBER	RF-1	REQUIRED	MANUFACTURER: ECORE STYLE: EVERLAST ROLL NUMBER/COLOR: EL04 PUMPKIN PURPLE	
PURPLE TURF	TURF	REQUIRED	MANUFACTURER: ECORE STYLE: CUSTOM NUMBER/COLOR: L1MT 00021B LAMINATE L1 BETTER PURPLE	
TRANSITION STRIP	TS-1	REQUIRED	MANUFACTURER: JOHNSONITE INSERT NUMBER: CE-40-C COLOR: BLACK	CONTOUR INSTALLATION: MTC-00-A STRAIGHT INSTALLATION: MT-00-A
PORCELAIN TILE 1	T-1	PRIMARY OPTION	MANUFACTURER: DAL TILE NUMBER/COLOR: CS55 MOROCCAN BROWN STYLE: CONTINENTAL SLATE SERIES 12"x12" #1212IP6	GROUT: MAPEI KERACOLOR SANDED GROUT #04 BAHAMA BEIGE
PORCELAIN TILE 2	T-2	REQUIRED	MANUFACTURER: DAL TILE NUMBER/COLOR: CS55 MOROCCAN BROWN STYLE: CONTINENTAL SLATE SERIES 12"x12" #1212IP6 COVE BASE TILE: 6"x12" #536C9TIP2 1'x6" #5C36C9TIP2	GROUT: MAPEI KERACOLOR SANDED GROUT #04 BAHAMA BEIGE
PORCELAIN TILE 3	T-3	REQUIRED	MANUFACTURER: DAL TILE NUMBER/COLOR: EV98 TERRACE BELGE STYLE: ESTA VILLA SERIES 10"x14" #EV981014IP2 BULLNOSE TILE: 3"x10" #EV98S4310IP2	GROUT: MAPEI KERACOLOR SANDED GROUT #39 IVORY 48" MINIMUM WAINSCOT INSTALLED WITH "BRICK WORKS PATTERN" (50% OVERLAP)
PORCELAIN TILE 4	T-4	REQUIRED	MANUFACTURER: DAL TILE NUMBER/COLOR: CS55 MOROCCAN BROWN STYLE: CONTINENTAL SLATE SERIES 3"x3" #33MSCIP COVE BASE TILE: 6"x12" #536C9TIP2 1'x6" #5C36C9TIP2	GROUT: MAPEI KERACOLOR SANDED GROUT #04 BAHAMA BEIGE - NOT IF FIBERGLASS INSERT IS USED
VINYL COMPOSITE TILE	VCT-1	ALTERNATE OPTION	MANUFACTURER: ARMSTRONG NUMBER: 52149 COLOR: COCOA BROWN STYLE: EXCELOX STONETEX	
VINYL PLANK FLOORING	VP-1	PRIMARY OPTION	MANUFACTURER: PATCRAFT NUMBER: 1600V COLOR: 820 SPICED CHERRY STYLE: CLICK REFRESH	
WOOD FLOORING	WF-1	ALTERNATE OPTION	MANUFACTURER: JUNKERS SPORT NUMBER: CLIP SYSTEM 9/16" COLOR: SYLVIA (3/16" FOAM UNDERLAY) STYLE: ACTIVITY FLOOR	
WALL PROTECTION 1	WP-1	REQUIRED	MANUFACTURER: LOCAL MILLWORK COLOR: 2 COATS ML CAMPBELL 40 DEGREE SATIN LACQUER STYLE: PLAIN SLICED WHITE MAPLE VENEER ON 1/4" MDF	EXPOSED ENDS TO BE EDGE BANDED WITH MATCHING VENEER
WALL PROTECTION 3	WP-3	ALTERNATE OPTION	MANUFACTURER: LOCAL COLOR: ALUMINUM DIAMOND PLATE STYLE: 1/16 " (.063) THICKNESS - ALUMINUM DIAMOND PLATE	
CULTURED STONE	ST-1	PRIMARY OPTION	MANUFACTURER: VENEER STONE COLOR: MILLSAP STYLE: IMPERIAL STONE STACK FLAT IMPERIAL STONE STACK CORNER	
WALL COVERING	WC-1	ALTERNATE OPTION	MANUFACTURER: LANARK NUMBER: MS-710-02 COLOR: MOCHA JAVA	USE THIS SPECIFIC NUMBER FOR PREFERRED PRICING.
MANIFESTO WALL	G-1	REQUIRED	MANIFESTO GRAPHIC PACKAGE (REFER TO ANYTIME FITNESS SIGNAGE STYLE FOR DETAIL)	WALL IS PAINTED "ANYTIME PURPLE"
BASE	VB-1	REQUIRED	MANUFACTURER: JOHNSONITE NUMBER: 40 COLOR: BLACK STYLE: 6" VINYL COVE	
CEILING TILE	C-1	REQUIRED	MANUFACTURER: USC ITEM: 76575 2' X 2' X 3/4" STYLE: ECLIPSE CLIMAPLUS SQ (WHITE) SUSPENSION SYSTEM DX/DXL24 (WHITE) EDGE TRIM: COMPASSO 12" TRIM ELITE (FLAT WHITE)	IF CEILING TILE IS USED, MAY NOT BE APPLICABLE TO ALL CLUBS
FIBERGLASS REINFORCED PANEL	FRP-1	REQUIRED	MANUFACTURER: MARLITE NUMBER: P100 STYLE: PEBBLE (WHITE)	
PLASTIC LAMINATE	L-1	REQUIRED	MANUFACTURER: ARBORITE NUMBER: P-322 CA STYLE: JAIPIR ONYX	NOT APPLICABLE FOR ALL CLUBS -WALL CAP & WINDOW SILL
SHOWER INSERT	SHW-1	ALTERNATE OPTION	MANUFACTURER: LOCAL SUPPLIER COLOR: ALMOND OR IVORY	MUST BE ADA COMPLIANT
COVER PLATES & DEVICES			IVORY	PROVIDE COLOR AS SPECIFIED BY CODE
CONCRETE	S-1	REQUIRED	SEALED CONCRETE	
CONCRETE	S-2	ALTERNATE OPTION	AMERIPOLISH 3D HS DENSIFIER AMERIPOLISH SURE LOCK DUE - COLOR: CHOCOLATE BROWN AMERIPOLISH 3D SP STAIN PROTECTOR CONCRETE (STAINED) FLOOR FINISH	

DOOR & HARDWARE SCHEDULE

DOOR #	ROOM NAME	DOOR SIZE	DOOR TYPE	FRAME TYPE	HARDWARE GROUP	REMARKS
101	GUEST LOBBY	(2) 3'-0" X 7'-0"	MATCH EXISTING		6	REFER TO 8/A7.1, I, 2
102	MANAGER	3'-0" X 7'-0"	B	I	3	2
103	TRAINER	3'-0" X 7'-0"	B	I	3	2
107	TANNING	3'-0" X 7'-0"	A	I	2	2
108	UNISEX	3'-0" X 7'-0"	A	I	2	2
109	UNISEX	3'-0" X 7'-0"	A	I	2	2
110	UNISEX	3'-0" X 7'-0"	A	I	2	2
111	UTILITY	3'-0" X 7'-0"	A	I	4	2
112	HALL	EXISTING	EXISTING	EXISTING	5	I, 2
GENERAL NOTE: PAINT EXISTING DOORS AND FRAMES TO MATCH ADJACENT WALL 1. VERIFY CONDITION OF DOOR HARDWARE, THRESHOLD AND FRAME ARE IN GOOD WORKING ORDER - REPAIR/REPLACE AS REQUIRED 2. HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERABLE PARTS ON ACCESSIBLE DOORS SHALL HAVE A SHAPE THAT IS EASY TO GRASP WITH ONE HAND AND DOES NOT REQUIRE TIGHT GRASPING, PINCHING OR TWISTING OF THE WRIST TO OPERATE.						

DOOR TYPES	WINDOW FRAMES
1 3/4" WOOD SOLID CORE FLUSH WOOD DOOR (SEALED)	METAL FRAME WITH 1/4" CLEAR TEMPERED GLAZING PAINT

DOOR FRAMES	HARDWARE GROUPS
	GROUP #1 BUTT HINGES 180 DEGREE HINGE ON SINGLE LEAF DESIGN HARDWARE Z-SID SINGLE DUMMY IVES R132 ROLLER LATCH WALL MOUNT DOOR STOP HOLD OPEN DELTANA SOLID BRASS MAGNETIC DOOR STOP HOLDER EACH DOOR  GROUP #2 BUTT HINGES WALL STOP CLOSER N073PD LOCKSET KICKPLATE DOUBLE ROBE HOOK  GROUP #3 BUTT HINGES WALL STOP OFFICE LOCKSET KICKPLATE DOUBLE ROBE HOOK  GROUP #4 BUTT HINGES WALL STOP STORAGE LOCKSET KICKPLATE KICK DOWN HOLD OPEN  GROUP #5 PANIC HARDWARE DETEX ALARM CONNECT TO SECURITY EQUIPMENT

RM. #	ROOM NAME	FLOOR	BASE	WALL	CEILING	REMARKS
100	MEMBER AREA	S-2	VINYL	PAIN	EXISTING	
101	GUEST LOBBY	S-2	VINYL	PAIN/STONE	A.C.T.	
102	MANAGER	CA-1	VINYL	PAIN	A.C.T.	
103	TRAINER	CA-1	VINYL	PAIN	A.C.T.	
104	CARDIO/STRENGTH	S-2	VINYL	PAIN	EXISTING	
105	FREE WEIGHTS	RF-1	VINYL	PAIN/MIRROR	EXISTING	
106	FUNCTIONAL AREA	TURF	VINYL	PAIN/VP-1	EXISTING	
107	TANNING	S-2	VINYL	PAIN	A.C.T.	
108	UNISEX 1	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	48" + BASE HIGH
109	UNISEX 2	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	WAINSCOT W/ BULLNOSE
110	UNISEX 3	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	EDGE CAP
111	UTILITY	S-1	VINYL	PAIN/FRP	EXISTING	
112	HALL	T-1	VINYL	PAIN	A.C.T.	
GENERAL NOTES: FIELD VERIFY WATER RESISTANT SHEATHING OR BETTER IN ALL WET CONDITIONS - REMOVE AND REPLACE AS REQUIRED CEILING WITH 'OPEN TO DECK' AREAS - PAINT FROM DECK DOWN WALL 2" BELOW LOWEST POINT - VERIFY WITH CORPORATE PRIOR TO PAINTING						

ARCHITECTURAL GENERAL NOTES

- ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH APPLICABLE CODES, LOCAL RESTRICTIONS, ORDINANCES AND LAWS. EACH CONTRACTOR OR SUBCONTRACTOR SHALL COMPLY WITH ALL PROVISIONS OF ALL APPLICABLE LAWS AND ORDER OF PUBLIC OFFICIALS WITH JURISDICTION FOR SAFETY OF PERSONS/PROPERTY. MAINTAIN FIRE RESISTANCE RATING FOR ALL EXISTING TENANT DEMISING WALLS.
- DIMENSION NOTES:
  - ALL EXTERIOR WALLS DIMENSIONED TO EXTERIOR OF EXISTING STRUCTURE, UNLESS NOTED OTHERWISE.
  - ALL NEW STUD WALL ASSEMBLY OPENINGS ARE NOMINAL DIMENSIONS.
  - ALL DIMENSIONS ARE TO FACE OF WALL ASSEMBLY, UNLESS NOTED OTHERWISE.
- THE GENERAL CONTRACTOR AS WELL AS ALL SUBCONTRACTORS SHALL VISIT THE SITE; VERIFY ALL DIMENSIONS BEFORE SUBMITTING A BID, NOTIFY OWNER OF ANY DISCREPANCIES OBSERVED, OBTAIN ALL REQUIRED PERMITS, AND VERIFY ALL SITE CONDITIONS PERTAINING TO THIS PROJECT PRIOR TO SUBMISSION OF BIDS. ANY DISCREPANCIES FOUND DURING SITE INVESTIGATION ARE TO BE REPORTED TO OWNER IN WRITING PRIOR TO BID SUBMISSION. G.C. TO ENSURE THAT EXISTING STRUCTURE IS NOT ALTERED OR DAMAGED WITH EXCEPTION OF MODIFICATIONS SHOWN ON DRAWINGS. ALL INSTALLATIONS AND ALL CONNECTIONS TO EXISTING BUILDING MECHANICAL SYSTEMS SHALL BE COORDINATED WITH AND PERFORMED UNDER THE SUPERVISION OF THE LANDLORD'S REP. VERIFY FIELD CONDITIONS PRIOR TO COMMENCEMENT OF EACH PORTION OF THE WORK. ALL EXISTING CONDITIONS, STRUCTURAL AND MECHANICAL CONNECTIONS TO ALL EXISTING BUILDING SERVICES MUST BE FIELD VERIFIED PRIOR TO SUBMISSION OF BIDS. ANY DISCREPANCIES SHALL BE REFLECTED AND NO ADJUSTMENT TO BID PRICE SHALL BE MADE AFTER BID SUBMISSION. SUBMISSION OF BID SHALL BE UNDERSTOOD AND CONSTRUED AS CONTRACTOR HAVING VERIFIED ALL EXISTING CONDITION WHETHER OR NOT SHOWN ON DRAWINGS AND HAVING TAKEN INTO ACCOUNT ANY ADJUSTMENT NECESSARY TO FULFILL THE DESIGN INTENT IN FULL AND COMPLETELY. G.C. TO COMPLY WITH OWNER'S RULES AND REGULATIONS REGARDING CONSTRUCTION WITHIN THE BUILDING, G.C. & ALL SUBCONTRACTORS SHALL FAMILIARIZE THEMSELVES WITH THE BASE BUILDING AND TO VERIFY WITH THE CLIENT BEFORE MODIFYING OR ATTACHING NEW CONSTRUCTION TO BASE BUILDING. GC SHALL PATCH AND REPAIR ALL EXISTING WALLS, FLOORS, CEILING OR OTHER SURFACES IDENTIFIED TO REMAIN THAT MAY BECOME DAMAGED DURING THE COURSE OF THE WORK. G.C. TO COORDINATE LAYOUT, ROUTING, AND INSTALLATION OF ALL NEW MECHANICAL, ELECTRICAL, FIRE PROTECTION, AND PLUMBING WORK WITH EXISTING MEP/FP SYSTEMS, AND WITH EXISTING STRUCTURE TO REMAIN. REPORT ALL DISCREPANCIES TO OWNER IN WRITING PRIOR TO SUBMITTING BID PACKAGE. EACH CONTRACTOR OR SUBCONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS, FEES, AND LICENSES REQUIRED FOR PROPER EXECUTION OF THEIR PORTION OF THE WORK. G.C. TO ENSURE THAT A COMPLETE SET OF CONSTRUCTION DOCUMENTS IS GIVEN TO ALL SUBCONTRACTORS PRIOR TO BID SUBMISSION. G.C. SHALL VERIFY THE LOCATION OF ALL UTILITIES. POINTS OF ACCESS TO THE SITE AND MATERIAL STAGING AREA LOCATIONS FOR THE CONTRACTOR SHALL BE APPROVED BY THE OWNER PRIOR TO THE TIME THE CONTRACTOR IS GIVEN NOTICE TO PROCEED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ANY TEMPORARY DRIVES, FENCING, BARRICADES, LIGHTING, ETC. AS NECESSARY TO PROVIDE SAFEGUARDS AND EGRESS IN AND OUT OF THE EXISTING FACILITIES AND PARKING DURING CONSTRUCTION. NORMAL BUSINESS OPERATIONS CANNOT BE INTERRUPTED DURING CONSTRUCTION WITHOUT PRIOR COORDINATION AND CONSENT OF THE OWNER.
- THE CONTRACT DOCUMENTS ARE COMPLEMENTARY, AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL. COORDINATE ALL PORTIONS OF THE WORK AS DESCRIBED IN THE CONTRACT DOCUMENTS. DISCREPANCIES BETWEEN PORTIONS OF THE CONTRACT DOCUMENTS ARE NOT INTENDED AND SHOULD BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO CONTINUING WITH THE AFFECTED PORTIONS OF THE WORK.
- ANY DIMENSIONS, DETAILS, NOTES OR SYMBOLS THAT APPLY TO ONE UNIT, APPLIES TO ALL UNITS LIKE SITUATIONS, UNLESS NOTED OTHERWISE.
- THE STATED DIMENSIONS SHALL TAKE PRECEDENCE OVER GRAPHICS. DO NOT SCALE THE DRAWINGS. THE OWNER SHOULD BE NOTIFIED OF ANY DISCREPANCIES. "LINE OF STRUCTURE" AS SHOWN AT THE HEAD CONDITIONS OF EACH PARTITION TYPE IS DIAGRAMMATIC ONLY AND DOES NOT INDICATE THE EXACT CONSTRUCTION CONDITION. RATED PARTITIONS ARE TO TERMINATE AT STRUCTURAL MEMBERS WITH A FIRE RESISTANCE RATING GREATER THAN OR EQUAL TO THE WALL RATING. WHERE REQUIRED, APPROPRIATE WALLS SHALL BE INSTALLED TO BE INSTALLED TO REMAIN. OTHER OBSTACLES, MEMBERS OR OTHER CONSTRUCTIONS, SUCH AS PIPING OR DUCTWORK, TO MAINTAIN FIRE RESISTANCE RATING. NON-RATED PARTITIONS THAT CONTINUE THROUGH STRUCTURE ARE TO TERMINATE AT APPROPRIATE LOCATIONS TO MAINTAIN THE INTENT OF A CONTINUOUS PLANE OF ONE-LAYER OF GYPSUM BOARD SHALL SEAL TIGHT TO DECK AT INSIDE FACE OF WALL FRAMING TO MINIMIZE AIR & MOISTURE INFILTRATION TO THE BUILDING INTERIOR. ALL RATED WALLS SHALL BE CONSTRUCTED FIRST. SECONDARY WALLS TO ABUTT, NOT PENETRATE, RATED WALLS. ALL GYPSUM BOARD SHALL BE 5/8" FIRE RATED TYPE, UNLESS NOTED OTHERWISE. FIRESTOPPING TO BE PROVIDED AT PENETRATIONS THROUGH RATED PARTITIONS AS SPECIFIED OR AS OTHERWISE REQUIRED BY THE ASSEMBLY RATING.
- DUCT PENETRATIONS OF FIRE RATED CORRIDORS, WALLS AND CEILINGS SHALL USE FIRE DAMPERS AS APPLICABLE CODES, ORDINANCES AND LAWS REQUIRE.
- PROVIDE ALL REQUIRED FIRE BLOCKING IN ACCORDANCE WITH APPLICABLE CODES, ORDINANCES AND LAWS.
- THE INSTALLATION OF AUTOMATIC FIRE SPRINKLER SYSTEMS SHALL COMPLY WITH APPLICABLE CODES, ORDINANCES AND LAWS.
- VERIFY THAT ALL EXISTING EXTERIOR LANDINGS ARE FLUSH WITH FINISHED FLOOR AND SLOPE AWAY FROM THE FACE OF BUILDING TO PROVIDE POSITIVE DRAINAGE, TYPICAL.
- WHERE DEMOLITION OCCURS ADJACENT TO EXISTING CONSTRUCTION TO REMAIN, PATCH AND REPAIR ADJACENT CONDITIONS FOR A UNIFORM APPEARANCE.
- ALL EXIT DOORS TO BE OPERABLE FROM THE INSIDE WITHOUT ANY SPECIAL KNOWLEDGE OR EFFORT. A READILY VISIBLE SIGN SHALL BE ADJACENT TO THE DOORWAY STATING "THIS DOOR TO REMAIN UNLOCKED DURING BUSINESS HOURS."
- VERIFY LOCATION, SIZE AND WALL THICKNESS REQUIRED TO RECESS MECHANICAL AND ELECTRICAL ITEMS AND MAINTAIN FIRE RATING REQUIREMENTS OF THE WALL (IF REQUIRED) AT THESE BUILT-INS: UNIT HEATERS, CONVECTORS, ELECTRICAL PANELS, FIRE EXTINGUISHERS, CABINETS, DUCTS, PIPING AND ALL OTHER SUCH RECESSES.
- USE ONLY NON-CORROSIVE FASTENERS ON ANY PRESSURE TREATED LUMBER. WHERE EXISTING INSULATION IS REMOVED OR MISSING, PATCH AND REPLACE INSULATION TO MATCH EXISTING CONDITIONS AND MAINTAIN REQUIRED R-VALUES.
- PROVIDE ALL SIGNAGE REQUIRED BY APPLICABLE CODES, ORDINANCES AND LAWS.
- GENERAL CONTRACTOR REQUIRED TO PROVIDE NECESSARY BLOCKING FOR ALL OWNER PROVIDED SIGNAGE, WALL-MOUNTED FIXTURES AND FURNISHINGS, AND SUPPORTS. G.C. SHALL VERIFY THE CHARACTERISTICS OF ALL EQUIPMENT, MILLWORK, OR OTHER ITEMS BEING FURNISHED BY OWNER OR OWNER'S CONTRACTORS FOR WHICH G.C. IS RESPONSIBLE FOR INSTALLING. G.C. ASSUMES COMPLETE RESPONSIBILITY WHEN OWNER FURNISHED ITEMS ARE ACCEPTED AND RECEIVED BY G.C. ALL LIGHT SWITCHES, THERMOSTATS, SECURITY ALARMS, ELECTRICAL OUTLETS, ETC. MUST BE MOUNTED TO MEET ALL GOVERNING ACCESSIBILITY REQUIREMENTS FOR FLOOR & HEIGHT CLEARANCES AND ONE HAND GRASPING OPERATION.
- VEHICULAR ACCESS MUST BE PROVIDED AND MAINTAINED SERVICEABLE THROUGHOUT CONSTRUCTION.
- CLEANING: THE CONTRACTOR SHALL AT ALL TIMES KEEP THE PREMISES FREE OF CONSTRUCTION DEBRIS AND TRASH. REMOVE ALL COMBUSTIBLE RUBBISH DURING CONSTRUCTION FROM THE BUILDING CONTINUOUSLY AND DISPOSE OF IN A LEGAL MANNER.
- AT THE TIME OF BUILDING COMPLETION, BUILDING IS TO BE THOROUGHLY CLEANED PRIOR TO TURNOVER TO OWNER, INCLUDING BUT NOT LIMITED TO VERTICAL AND HORIZONTAL SURFACES, DUCTS (INSIDE AND OUT), BAR JOIST, BEAMS, & PIPING IN EXPOSED CEILINGS AS WELL AS NEW FILTERS IN ALL HVAC UNITS.
- REFER TO ENGINEERED CONSTRUCTION DOCUMENTS BY OTHERS FOR ADDITIONAL PERTINENT INFORMATION.
- FOR ALL AIR CONDITIONING, EXHAUST & SUPPLY FANS, HVAC & REFRIGERATION EQUIPMENT CURBS, GENERAL CONTRACTOR SHALL PROVIDE & INSTALL SUITABLE BLOCKING IN WALLS & CEILING TO SUPPORT FIXTURES, EQUIPMENT & CANOPIES.

ROOM FINISH SCHEDULE

RM. #	ROOM NAME	FLOOR	BASE	WALL	CEILING	REMARKS
100	MEMBER AREA	S-2	VINYL	PAIN	EXISTING	
101	GUEST LOBBY	S-2	VINYL	PAIN/STONE	A.C.T.	
102	MANAGER	CA-1	VINYL	PAIN	A.C.T.	
103	TRAINER	CA-1	VINYL	PAIN	A.C.T.	
104	CARDIO/STRENGTH	S-2	VINYL	PAIN	EXISTING	
105	FREE WEIGHTS	RF-1	VINYL	PAIN/MIRROR	EXISTING	
106	FUNCTIONAL AREA	TURF	VINYL	PAIN/VP-1	EXISTING	
107	TANNING	S-2	VINYL	PAIN	A.C.T.	
108	UNISEX 1	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	48" + BASE HIGH
109	UNISEX 2	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	WAINSCOT W/ BULLNOSE
110	UNISEX 3	T-2	T-2	PAIN/T-3	GYP. BD. PAIN	EDGE CAP
111	UTILITY	S-1	VINYL	PAIN/FRP	EXISTING	
112	HALL	T-1	VINYL	PAIN	A.C.T.	
GENERAL NOTES: FIELD VERIFY WATER RESISTANT SHEATHING OR BETTER IN ALL WET CONDITIONS - REMOVE AND REPLACE AS REQUIRED CEILING WITH 'OPEN TO DECK' AREAS - PAINT FROM DECK DOWN WALL 2" BELOW LOWEST POINT - VERIFY WITH CORPORATE PRIOR TO PAINTING						

CONSULTANT:



15 Ninth Avenue North, Hopkins, MN 55343  
Phone: 952.941.8860 www.wilkuearch.com

CLIENT:




ANYTIME FITNESS, LLC  
12181 MARGO AVE SOUTH  
HASTINGS, MN 55033  
PHONE: (651) 438-5000

PROJECT INFORMATION:



SEAL:

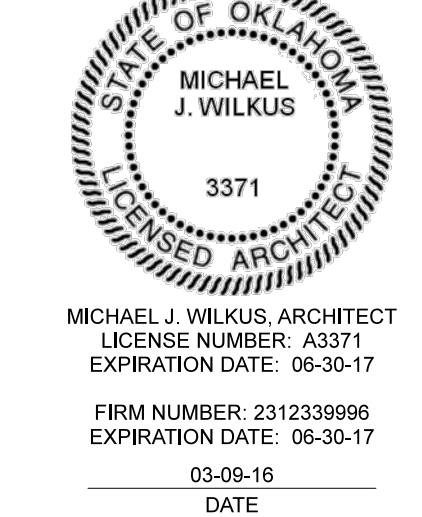

PROJECT NO.: 2016-0166  
DRAWN BY: DAA  
CHECKED BY: KMB

ISSUE: DATE:  
PERMIT SET 03-09-16

REVISION: DATE:

1	
2	
3	
4	
5	
6	
7	
8	
9	
10	

PROJECT LOCATION:  
DURANT, OK

SHEET NUMBER / TITLE:

A5.0  
SCHEDULES