


## Closed End Rivets

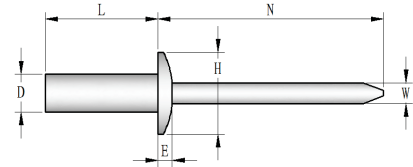

### Stainless Steel

304 Stainless Steel Body / 420 Stainless Steel Mandrel

<b>Domed Head</b>											
Nominal Body Diameter (D)	Part Number	Body Diameter (D)	Grip Range (Min) (Max)	Hole Size & Drill No.	Body Length MAX (L)	Minimum Mandrel Protrusion (N)	Mandrel Diameter (W)	Flange (head) Diameter (H)	Flange (head) Thickness (Ref)(E)	Typical Shear min Lbs.	Typical Tensile min Lbs.
1/8	SSDSSH-04-03	0.125	0.126 - 0.187	.129-.133 #30	0.422	1.00	0.074	0.238 ±.014	0.050	400	450
5/32	SSDSSH-05-03	0.156	0.126 - 0.187	.160-.164 #20	0.437	1.06	0.092	0.312 ±.016	0.065	700	800
3/16	SSDSSH-06-02	0.188	0.020 - 0.125	.192-.196 #11	0.406	1.06	0.110	0.375 ±.019	0.080	850	900
	SSDSSH-06-04	0.188	0.188 - 0.250	.192-.196 #11	0.531	1.06	0.110	0.375 ±.019	0.080	850	900