

**MC-11T** 

### MOBILE COMBO TRANSIT MIX PLANT



## SUPERIOR DESIGN

## **RUGGED CONSTRUCTION**

228 CU YD/HR PRODUCTION\* RELIABLE OPERATION HIGH QUALITY CONCRETE CONSISTENT BATCHES

FAST SETUP/TEARDOWN UNITIZED CONSTRUCTION LOW ERECTION COST BUILT TO TRAVEL

The **ERIE MC-11T** Meets All The Demands Of Today's Fast Moving Concrete Construction Challenges


- The Heavily Constructed Travel Frame Is Designed to Reduce Mobilization Costs And Setup Times
- Plant Operations Personnel Find Quick Access To All Plant Operations And Components
- Project Supervisors Count On The MC-11T For Mobile, Dry Batch Concrete Construction Projects



# **MOBILE COMBO TRANSIT MIX PLANT**

**MC-11T** 

The ERIE MC-11T delivers the best in a high production mobile transit mix plant. Tight factory specifications are designed and manufactured into every plant for rock solid reliability. The MC-11T moves quickly, meets all production deadlines and provides greater profitability through decades of dependable operation.

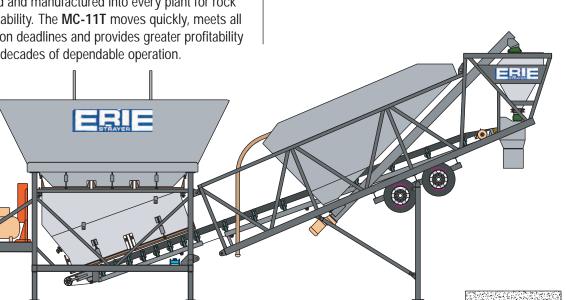

### **BASE CONFIGURATION\*\***

- Mobile plant travel frame
- 20 cubic yard three compartment aggregate bin
- 12 cubic yard aggregate batcher
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- 30" batch transfer conveyor •
- 20 HP Dodge TXT 415 shaft mount reducer •
- 300 bbl in-truss cement bin
- 4" air loading pipe
- 10" screw conveyors (2) •
- 12 cubic yard cement batcher •
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- Truck charging chute
- 3" Badger electronic water meter
- 10 HP Ingersoll-Rand air compressor
- 4 1/2 HP aeration blower
- Plant motor control panel
- Manual control panel

### **OPTIONAL FEATURES\*\***

- 10 cubic yard batchers
- Fourth aggregate bin compartment
- 80 and 100 cubic yard aggregate bins
- AR-400 steel and Erithane bin and batcher liners
- 36" batch transfer conveyor
- 12" screw conveyors
- 300 bbl mobile auxiliary cement/flyash bin
- Additional 4" and 5" air loading pipes
- Anti-overfill valves
- Electromagnetic flow water meter
- 15 - 30 HP air compressors
- Plant maintenance platforms
- Screw jack and outrigger support structure
- ERIE Scout computer control system
- Hydronix Hydro-Probe II microwave moisture system
- Total in-plant wiring, piping and plumbing
- C&W dust collection systems
- Fold and Tow bin charging conveyors
- Aggregate ground hoppers •
- Automatic aggregate handling panel
  - \*\* Consult factory for complete listing \* Estimated production based on industry standards; consult factory for details







ERIE STRAYER COMPANY P.O. BOX 1031 ERIE, PA 16512 1851 RUDOLPH AVE ERIE, PA 16502 814-456-7001 PHONE 814-452-3422 FAX www.eriestrayer.com email: sales@eriestrayer.com