
# LOCKFORMER

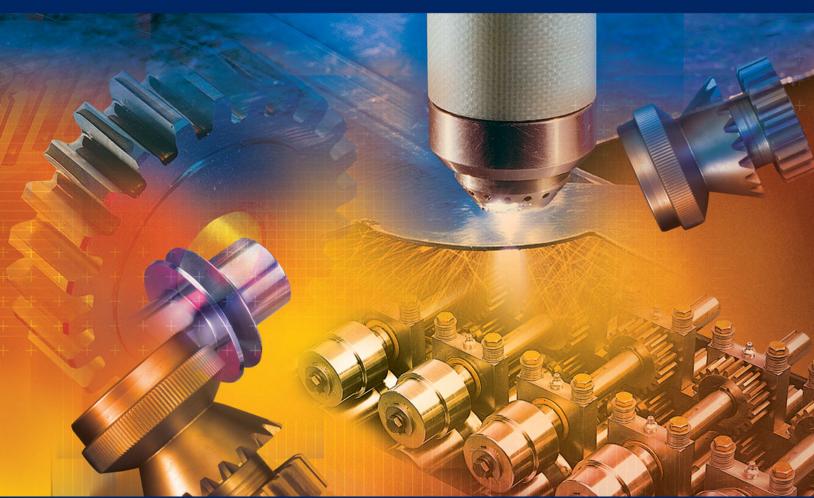

INSTRUCTIONS & PARTS DIAGRAM Pittsburgh 18 Gauge

LKF Pittsburgh 18 Gauge

# LOCKFORMER

# Pittsburgh 18 Gauge Instructions and Parts Diagram





WARNING THIS EQUIPMENT IS DESIGNED TO BE OPERATED WITH ALL COVERS SECURED IN PLACE. OPERATION WITHOUT THESE SAFEGUARDS MAY RESULT IN CONDITIONS WHICH ARE HAZARDOUS TO THE OPERATOR AND OBSERVERS.

## SAFETY GUIDELINES

Before operating the machine, study and follow the safety precautions in this section. These precautions are intended to prevent injury to you and your fellow workers. They cannot, however, cover all possible situations. Therefore, EXERCISE EXTREME CAUTION and use COMMON SENSE before performing any procedure or operation.

### **Safety Precautions BEFORE starting the machine(s)**

- Only one person should control the machine(s). Never allow anyone to operate the controls while you are operating or working on this equipment. In addition to disconnecting power always use lock outs and tagouts to prevent accidental start-up when performing maintenance procedures.
- Keep your hands away from internal workings of the machinery when starting, running or stopping.
- Keep your work area clean. Remove all scrap, oil spills, rags, tools and other loose items that could cause you to slip, trip and fall.
- When cleaning the machine or any of its components, do not use toxic or flammable substances. Do not perform any cleaning while the equipment is running.
- Never override or disable any safety switch or safety interlock.
- If so equipped, make sure that hydraulic and pneumatic pressures are at specified levels before operating this equipment.
- Do not operate the rollformer unless all covers and guards are in place.
- Be sure that this Instruction Manual is kept near the machine so the operator can refer to it when necessary.
- Keep this equipment properly maintained.
- Always turn off power to the machine(s) at the main disconnect before performing any maintenance or adjustments so accidental start-up or electrocution cannot occur.

## Safety precautions WHILE operating the machine(s)

- Never leave the work area while the equipment is in operation.
- Never leave the machine unattended while it is under power or in operation.
- Always be alert while operating machinery.
- Be alert for loose, worn or broken parts. Do not attempt to operate any machinery with such parts present or if the machinery is making unusual noises or actions.
- Avoid skin contact, prolonged breathing, or eye exposure to any stock lubrication fluid being used.
- Be aware of the locations of the **Power Off** or **Emergency Stop** button in case of an emergency.
- Be sure all guards and covers are in place.
- Continually observe the rollforming process and related equipment. If any unusual condition develops, immediately stop and inspect the machine.
- Protect yourself! Wear safety glasses. Do not wear loose clothing, neckties, or jewelry. If long sleeves must be worn, avoid loose cuffs and buttons. Tie back and contain long hair.
- Never adjust any roll feature or perform work near the rolls, gears or power take off while they are running.

#### General

If any pneumatic or hydraulic feature is used, disconnect the main supply and exhaust pressure and bleed the lines to prevent cycling on retained pressure.

Always shut off the power at the main disconnect switch before entering the electrical control box.

Do not use compressed air to clean the machines. Air pressure may drive dirt and small chip into the machine(s) bearing surfaces or cause bodily injury.

#### IMPORTANT

The information contained herein is to be use as a general guide only. For further safety information obtain and read the ANSI bulletin entitled:

ANSI B11.12-1996 Rollforming and Roll-Bending Machines safety. Requirements for Construction, Care and Use.

CONTACT: American National Standards Institute

11 West 42nd Street. New York, New York 10036



#### CAUTION

To provide clarity to points in question the illustrations and photos appearing in this manual are shown with covers and guards removed. NEVER OPERATE THIS EQUIPMENT UNLESS ALL COVERS AND GUARDS ARE IN PLACE.



### SAFETY GUIDELINES

You are **NOT** ready to operate this equipment if you have not read and understood all of the safety information in this manual.



- Do not wear loose clothing, neckties, improper gloves, or jewelry while operating this machine. If long sleeves must be worn, avoid loose cuffs or buttons, Tie back or contain long hair.
- Wear proper gloves to prevent lacerations caused by sharp edges of stock as it travels through the forming operation.
- Never operate this equipment unless all covers and guards are properly installed.
- Be alert for loose, worn, or broken parts. Never operate this equipment unless it is in good working condition.
- As the stock enters the guides and feeds into the rolls, a pinch point is created as the stock advances. Keep hands clear of area and all pinch points.
- Always disconnect the main power supply power and install lock outs using a lockout / tagout procedure when making adjustments or repairs.
- When transporting, take into consideration that the machine is top heavy and may suddenly tip over.
- The machine is designed for fixed installations and is not intended for portability.

Remember that the information contained in this manual is only a portion of an adequate training program. It must be coupled with specific instructions for your application along with full information of national and local safety regulations that may apply.

### **Recommendations**

We recommend that shops that work lighter iron, such as is used on smaller pipes and fittings employ 5/16" Pittsburgh Lock Rolls mounted on the extended shafts of this machine. If production warrants, our smaller machine (Lockforrner 22") should be installed.

The reason for this recommendation is as follows:

As most hand brakes cannot be used to form a single edge smaller than  $\frac{3}{4}$ " on heavy iron our Lockforrner = 18 rolls a  $\frac{3}{4}$ " pocket with the permanent rolls.

The lighter iron can be worked in the permanent rolls but the closing down of the lock over the 3/8" span causes distortion of the material.

We, therefore, suggest that you use the 3/8" Pittsburgh Lock auxiliary rolls on 22 gauge to 28 gauge iron. These rolls may be installed or changed in about 20 minutes by an experienced operator and the lock resulting is much more accurate and neat,

# **Operating Instructions**


**VERY IMPORTANT!** TO SET THE CALIBRATED DIAL FOR 16 AND 18 GAUGE, TURN DIAL (RIGHT HAND THREAD) DOWN TO THE BOTTOM WITH THE LETTER "S" IN LINE WITH THE ARROW MARKED ON COVER OF MACHINE. THEN RELEASE TO SETTING OF MATERIAL TO BE USED.


THE CALIBRATED DIAL: The purpose of this dial is to regulate the width (not the depth) of the pocket. For example, when forming 18-gauge metal, the pocket must be wide enough to take the 18-gauge single edge which fits into it; and should become narrower correspondingly, for lighter gauges. This is done by setting the dial to whatever gauge you are running through the machine.


Should the dial get out of adjustment, re-set by:

- (1) loosening the set screw,
- (2) turning the stud all the way down,
- (3) setting the "S" mark on the dial opposite the pointer on the cover.

#### Example:







Turn CALIBRATED DIAL all the way down and then back to gauge of metal to be run through the machine. Hold material against the angle gauge and slide it into the forming head. Be sure to hold the material to the gauge.

Your Lockformer has been adjusted at the factory, but on account of the difference in materials in various localities it is sometimes necessary to readjust it. Proceed as follows:

- (1) If material slips or sticks on leaving forming head, tighten Hold Down Stud at finishing end slightly.
- (2) If the material works away from the feed gauge tighten Hold Down Studs at starting end until it corrects itself.
- (3) If the material shows heavy pressure marks, loosen Hold Down Studs slightly.

If a wider or narrower hammer-over edge is desired, move the angle gauge forward or back. Be sure to keep the gauge parallel with the front edge of the tap plate of the machine.

#### MATERIAL SHOULD NOT TOUCH GAUGE ON FINISH END OF MACHINE.

It is very important that long sheets be held flat and against the angle gauge when starting through the forming head.

The Lockformer 18 will handle pieces 8" and longer. If shorter length is required, NOTCH LONG LENGTH AND CUT AFTER FORMING.

#### Lubrication


There are seven alemite fittings located on the underside of the stand roller case on the auxiliary side of the machine. These fittings lubricate the main reduction bearings and should be lubricated after every four hours of operation.

#### Recommended lubricant:

Standard Viscous #3 (Product of the Standard Oil Company) or equivalent. The slow speed shafts do not require additional lubrication. Grease gears periodically or as needed. If machine is to be used out of doors, an oil or grease film will prevent rusting of surfaces.

#### To install supplementary rolls, proceed as follows:

- 1. Remove top cover.
- 2. Remove rear section of top plate. This will expose the extended shafts on which the rolls are to be mounted.
- 3. Select the first pair of rolls, which are marked "T1" and "B1" and slip them on the shafts at the left, or feed side of the machine, placing "T1" on the upper shaft and "B1" on the lower. Repeat this procedure with rolls T2 and "B2", 'T3" and "B3" etc., until all rolls have been mounted. All rolls marked "T" should be mounted on the top shafts and "B" rolls on the bottom shafts, in numerical order, reading from left to right, facing the shafts. NUMBERED SIDE MUST FACE OUTWARDS.
- 4. Install keys and fasten rolls to shafts with capscrews and special washers which are provided.
- 5. Mount entrance and exit gauges onto stand using slotted holes provided in stand table top. Set entrance gauge by placing a straight edge along the outer edge of the auxiliary rolls, Measure in from this straight edge to the extreme ends of entrance gauge bar the required amount. See Sketch (1). When using the Drive Cleat Rolls the straight edge is placed along the entrance gauge and the measurement is made from the distance between the straight edge and the number one and seven roll stations.

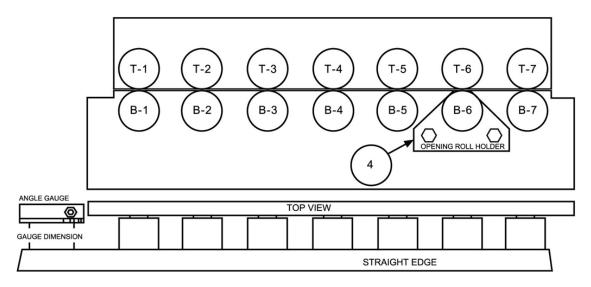


SKETCH No.1



- A. **Type "S" Double Seam:** (22-26 Gauge) 5/16" Pocket. Uses approximately 1" material. Gauge setting......1-1/8"
- B. Type "L" Double Seam: (16-20 Gauge) 7/16" Pocket. Uses approximately 1-1/8" material. Gauge setting......1-5/16"
- C. **Standing Seam Rolls:** (16-20 Gauge) 3/4" Height. Uses approximately 2-1/8" per completed seam. Forms both single and double edge by simple gauge attachment. Note: Two piece entrance gauge supplied. Drilled bar mounted to stand with clips attached, to form standing seam.

Gauge setting...... 2" Second Gauge edge bar snaps under clips and is used for right angle flange.

See Sketch below: (2)

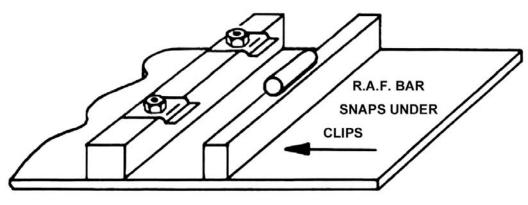



The top seven roll is not fastened by bolt and washer but allowed to float. The exit angle gauge has an adjustable bar that can be lowered to exert pressure on the material as it emerges from the rolls, thereby straightening the finished section.

See Sketch (3) below: Set exit gauge to the standing seam shape.




SKETCH No. 3


- D. **Right Angle Flange Rolls:** (16-24 Gauge) on straight pieces only. Adjustable to 7/16" high. Gauge setting......1-5/16"
- E. 5/16" Pittsburgh Lock Rolls: (22-26 Gauge) 5/16" Pocket.

Gauge setting.....1-11/16"

To install auxiliary opening roll holder remove rolls, from the number six roll station and bolts that straddle bottom six roll shaft (See Sketch 4 and 4A). Place opening roll holder onto machine and fasten with the two  $\frac{1}{2}$ "-13 NC x 2" HHCS provided.

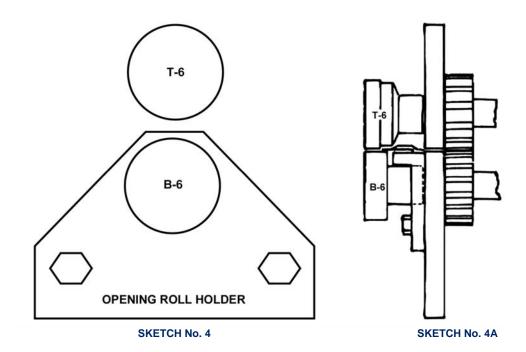

 F. Drive Cleat: (20-26) Gauge Material) Cleat width, 1-1/8", 2-1/8" stock width. Gauge setting (See Sketch No. 5)...... 1" to 1-/32" Note: The top =3 roll is not fastened by bolt and washer but allowed to float.

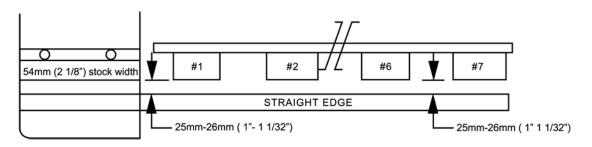

SKETCH No. 5

G. **Combination 3-in-1 Rolls:** (22-28 Gauge) Uses approximately 1-3/4" on "T" Section 1-1/8" on standing seam ½" on right angle flange.

#### Note:

When the First setting is made the other two will be automatically correct The other two shapes can be made by placing material to the proper gauge step.

There are two top seven rolls, one stamped T-7, 22-24 gauge which has a wide slot and should be used with 22 and 24 gauge material. The second roll is stamped T-7, 26-28 gauge and should be used for the lighter materials. The exit angle gauge has an adjustable bar that can be lowered to exert pressure on the material as it emerges from the rolls, thereby straightening the finished section. (See Sketch 3).

**Caution:** When adjusting exit gauge be sure it is set to the "T" section shape or damage will result by material interference with the gauge bar.


#### Note:

When changing rolls, loosen the exit gauge and move it to the extreme end of the table slots, away from where the material will pass. Run a test piece of material through the rolls and stop machine as the lead edge of the formed material reaches the end of the exit table.


Set exit gauge to the formed material; the gauge should be set flush to, but not bearing against, the material unless side pressure is required for straightening. Adjustment of the tension on the 3/8" studs that pass through the plates will affect the shape and tendency of material to hold to the entrance gauge.


It is important: that when changing rolls all parts pertaining to each set be removed from the machine and all parts included on assembly.

- 6. Replace top cover and back plate
- 7. Hold material against gauge and feed into machine.

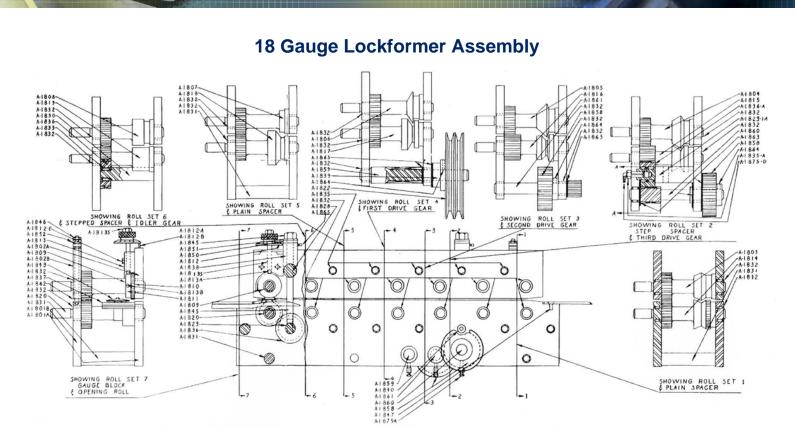

#### When ordering parts be sure to include the serial number of your Lockformer

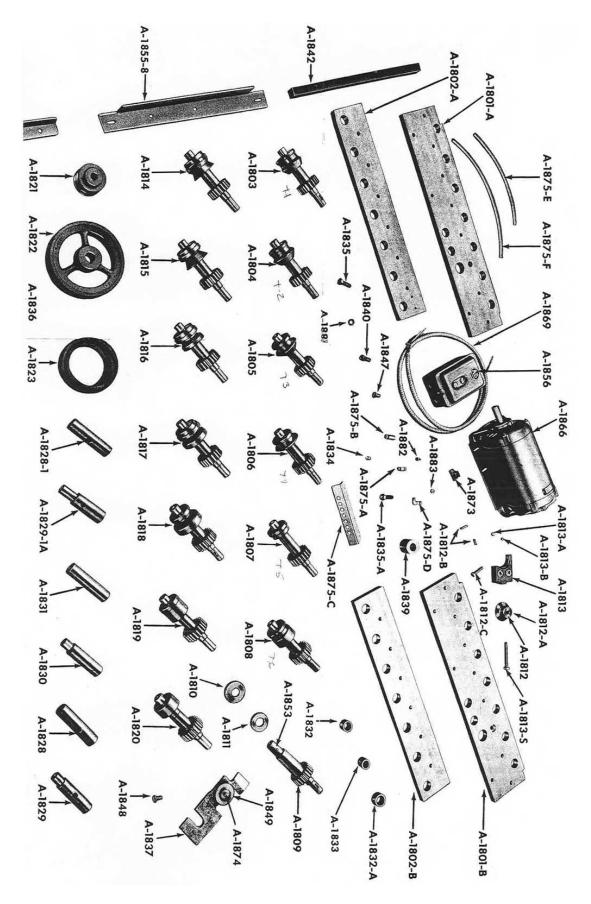

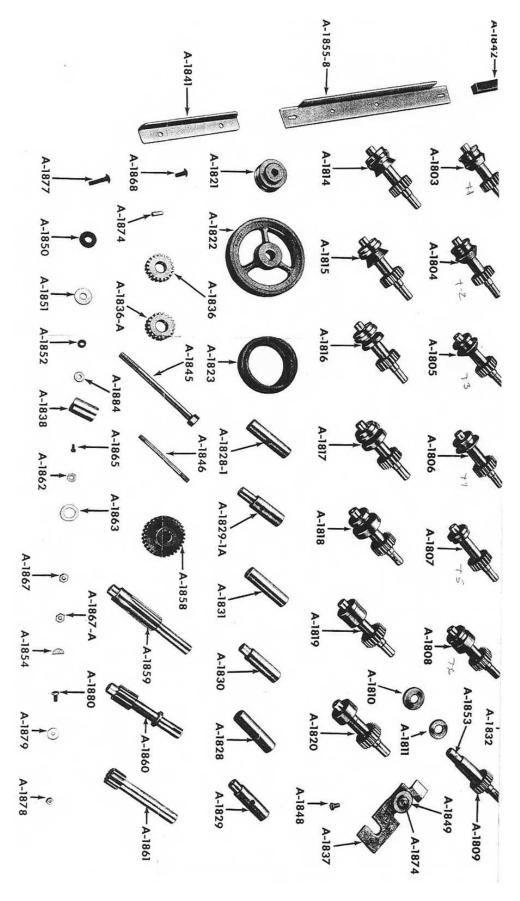


# Lockformer Pittsburgh 18 Gauge Parts List

For machines serial #5000 and higher. Please use New Number when ordering parts.

New Part No.	Old Part No.	Description	Pieces per Unit
20003	A -1801- A	Lower Front Plate	1
20004	A -1801 -B	Lower Back Plate	1
20001	A -1802 -A	Upper Front Plate	1
20002	A -1802 -B	Upper Back Plate	1
11021	A -1803	18 Pitts T1	1
11022	A-1804	18 Pitts T2	1
11023	A-1805	18 Pitts T3	1
11024	A-1806	18 Pitts T4	1
11025	A-1807	18 Pitts T5	1
11026	A-1808	18 Pitts T6	1
13127	A -1809 -A	T7 Roll Shaft	1
14621	A -1809 -B	16 Pitts Cir.	1
14160	A -1809 -C	Drive Gear	1
11034	A -1810	Knurl Ring	1
11035	A -1811	Plain Ring	1
14725	A -1812	Adjustable Dial	1
60652	A -1812-A	5/16-18 x ½ SSS	1
71018	A -1812-B2	Comp Spring	1
60097	A -1812-C	3/4 HHCS	2
40270	A- 1813	Adjustable Blk. Fin	1
66507	A -1813 -A	1/2 Steel Ball	1
66508	A -1813 -B	3/8 Steel Ball	1
14881	A -1813 –S	Adjustable Dial Screw	1
11027	A -1814	18 Pitts B1	1
11028	A -1815	18 Pitts B2	1
11029	A -1816	18 Pitts B3	1
11030	A -1817	18 Pitts B4	1
11031	A -1818	18 Pitts B5	1
11032	A -1819	18 Pitts B6	1
11033	A -1820	18 Pitts B7	1
70411	A -1821	2 BK 28 7 & 8 Sheave	1
70480	A -1822	2 BK 80 H 1 Sheave	1
70054	A -1823	5L-520	2
13552	A -1831	Spacer Dr. off Center	1
13553	A -1831 -1	Spacer Dr. on Center	1
13652	A -1829	Idler Spacer off Center	1
13656	A- 1829 -A	Main Idler Spacer	1
13604	A -1830	Idler Spacer Plain	4
13605	A -1831	Plain Spacer	9
66100	A -1832	B1612 Torr. Bearing	30
66111	A -1832 -A	HJ 1624 12 Torr. Bearing	2
66101	A -1832 -1	B1612 OH Torr. Bearing	4
		-	

66090     A - 1833     B1416 Torr. Bearing 1610 Grease Fittings     5       60154     A - 1835     J-13 x 1 - 1/2 HHCS HT     32       42001     A - 1835 - A     Lube Bolt     1       14161     A - 1835 - A     Lube Bolt     1       14162     A - 1836 - A     Main Idler Gear     5       14162     A - 1837 - A     Opening Roll Bracket Assembly     1       14622     A - 1834     Sdl. Washer     2       60450     A - 1844     Sdl. Washer     1       21454     A - 1845     Hex Head Stud Assembly     2       60551     A - 1845     Hex Head Stud Assembly     2       60554     A - 1847     'y-13 x 1 FH SCS     4       60953     A - 1847     'y-13 x 1 FH SCS     2       60954     A - 1847     'y-13 x 1 FH SCS     2       60953     A - 1846     36-16 x 6 1/2     2       60095     A - 1845     Hex Head Stud Assembly     1       162341     A - 1850     The Pin     2       62402     A - 1851				
66640     A - 1834     1610 Grease Fittings     7       60154     A - 1835     V-13 x 1-1/2 HICS HT     32       42001     A - 1836     Idler Gear     1       14161     A - 1836     Idler Gear     5       14162     A - 1837 - A     Opening Roll Bracket Assembly     1       14622     A - 1837 - A     Opening Roll Bracket Assembly     1       14622     A - 1837 - A     Opening Roll Bracket Assembly     2       60450     A - 1840     ½-13 x 1 SHCS     1       21454     A - 1847     ½-13 x 1 SHCS     1       21454     A - 1845     Hex Head Stud Assembly     2       60553     A - 1847     ½-13 x 1 FH SCS     4       60953     A - 1847     ½-13 x 1 FH SCS     2       60954     A - 1847     ½-13 x 1 FH SCS     2     2       60953     A - 1847     ½-16 x 6 - 1/2     2     2       60953     A - 1845     3/8 Beleville Washer     26     2       62340     A - 1853     4 - 17 pr. Pin     2     2 </td <td>66090</td> <td>۸ -1833</td> <td>B1416 Torr Bearing</td> <td>5</td>	66090	۸ -1833	B1416 Torr Bearing	5
60154     A - 1835     2-13 x 1 - 1/2 HHCŠ HT     32       42001     A - 1835     Lube Bolt     1       14161     A - 1836     Heller Gear     5       14162     A - 1836 - A     Main Idler Gear     5       14162     A - 1836 - A     Opening Roll Bracket Assembly     1       14622     A - 1840     2-13 x 1 SHCS     1       21454     A - 1840     2-13 x 1 SHCS     1       21454     A - 1842     Entrance     1       260551     A - 1844     Hex Head Stud Assembly     2       60953     A - 1846     3/8-16 x 1 FH SCS     2       60954     A - 1847     Y-13 x 1 FH SCS     4       60953     A - 1846     3/8-16 x 1 FH SCS     2       1036     A - 1851     5/8 x 3/16 Washer     24       62700     A - 1855     Stard Assembly     1       12341     A - 1855     Stard Assembly     1       2404     A - 1855     Motor Base     2       80100     A - 1856     Motor Center     1				
42001     A - 1835 - A     Lube Bolt     1       14161     A - 1836 - A     Main Idler Gear     5       14162     A - 1837 - A     Opening Roll Bracket Assembly     1       14622     A - 1837 - A     Opening Roll Bracket Assembly     1       1462     A - 1836     Sdl. Washer     2       60450     A - 1840     ½-13 x 1 SHCS     1       21454     A - 1846     Hex Head Stud Assembly     2       60551     A - 1845     Hex Head Stud Assembly     2       60593     A - 1847     ½-13 x 1 FH SCS     4       60953     A - 1847     ½-13 x 1 FH SCS     4       60953     A - 1848     3/8-16 x 1 FH SCS     2       60953     A - 1847     ½-13 x 1 FH SCS     2       62340     A - 1857     5/8 Bellewille Washer     2       62340     A - 1855     Stard Assembly     1       1     2     3/8 Belewille Washer     2       62402     A - 1856     Motor Base     2       80100     A - 1855     Stard Assembl				-
14161   A. 1836   Idler Gear   5     14162   A. 1837 - A   Opening Roll Bracket Assembly   1     14622   A. 1837 - A   Opening Roll Bracket Assembly   1     14622   A. 1838   Sdl. Washer   2     60450   A. 1840   1/-13 x 1 SHCS   1     21454   A. 1842   Entrance   1     56647   A. 1845   Hex Head Stud Assembly   2     60953   A. 1847   1/-13 x 1 FH SCS   4     60953   A. 1849   Opening Roll   1     62341   A. 1849   Opening Roll   1     62341   A. 1850 - A   5/8 Belleville Washer   2     62081   A. 1851   5/8 Shellwille Washer   24     62700   A. 1855   Stard Assembly   1     280100   A. 1855   Stard Assembly   1     29404   A. 1856   Motor Center   1     14301   A. 1857   Cover Assembly   1     14301   A. 1857   Cover Assembly   1     13301   A. 1860   3rd Drive Shaft   1	60154	A -1835	2-13 X 1-1/2 HHCS HT	32
14161   A. 1836   Idler Gear   5     14162   A. 1837 - A   Opening Roll Bracket Assembly   1     14622   A. 1837 - A   Opening Roll Bracket Assembly   1     14622   A. 1838   Sdl. Washer   2     60450   A. 1840   1/-13 x 1 SHCS   1     21454   A. 1842   Entrance   1     56647   A. 1845   Hex Head Stud Assembly   2     60953   A. 1847   1/-13 x 1 FH SCS   4     60953   A. 1849   Opening Roll   1     62341   A. 1849   Opening Roll   1     62341   A. 1850 - A   5/8 Belleville Washer   2     62081   A. 1851   5/8 Shellwille Washer   24     62700   A. 1855   Stard Assembly   1     280100   A. 1855   Stard Assembly   1     29404   A. 1856   Motor Center   1     14301   A. 1857   Cover Assembly   1     14301   A. 1857   Cover Assembly   1     13301   A. 1860   3rd Drive Shaft   1	42004	A 1925 A	Luba Dalt	4
14162   A.1836-A   Main Idler Gear   1     52504   A.1837-A   Opening Roll Bracket Assembly   1     14622   A.1838   Sdl. Washer   2     60450   A.1840   ½-13 x 1 SHCS   1     21434   A.1842   Entrance   1     156647   A.1845   Hex Head Stud Assembly   2     60953   A.1846   3/8-16 x 1 FH SCS   4     60954   A.1847   ½-13 x 1 FH SCS   4     60953   A.1848   3/8-16 x 1 FH SCS   2     102341   A.1850   A   16     62341   A.1851   S/8 Beleville Washer   24     62700   A.1853   4.1 Tpr. Fin   2     62402   A.1854   15 Woodroff Key   3     50010   A.1855   Stard Assembly   1     13011   A.1856   Motor Center   1     13024   A.1856   Motor Center   1     13031   A.1858   Drive Gear   2     14301   A.1856   Motor Ease   2     13010   A.1866   W				
52504     A.1837 - A.     Opening Roll Bracket Assembly     1       14622     A.1838     Sdl. Washer     2       60450     A.1840     ½-13 x 1 SHCS     1       121434     A.1842     Entrance     1       56647     A.1845     Hex Head Stud Assembly     2       60953     A.1846     3/8-16 K - 1/2     2       60953     A.1848     3/8-16 K - 1/2     2       60953     A.1849     Opening Roll     1       62341     A.1850 - A     5/8 Bellewille Washer     16       62081     A.1852 - A     3/8 Belewille Washer     2       62340     A.1852 - A     3/8 Belewille Washer     2       62081     A.1852     Motor Center     1       7     A.1855     Stard Assembly     1       2404     A.1856     Motor Center     1       80324     A.1856     Motor Center     1       13033     A.1850     3rd Drive Shaft     1       13301     A.1850     3rd Drive Shaft     1	-			
14622   A.1838   Sdl. Wesher   2     60450   A.1840   ½-13 x 1 SHCS   1     21434   A.1842   Entrance   1     56647   A.1845   Hex Head Stud Assembly   2     60954   A.1847   ½-13 x 1 FH SCS   4     60953   A.1848   3/8-16 x 1-H SCS   2     60954   A.1847   ½-13 x 1 FH SCS   4     60953   A.1848   3/8-16 x 1-H SCS   2     10364   A.1849   Opening Roll   1     62341   A.1850-A   5/8 Beleville Washer   26     62402   A.1853   4-1 Tpr. Pin   2     62402   A.1853   15 Woodroff Key   3     50010   A.1855   Stard Assembly   1     2404   A.1857   Cover Assembly   1     2404   A.1856   Motor Center   1     80324   A.1856   Motor Sear   2     13301   A.1859   1". Dive Shaft   1     13303   A.1860   3rd Drive Shaft   1     13303   A.1865   ½-0.20				
60450     A - 1840     Y-13 x 1 SHCS     1       21454     A 1842     Entrance     1       56647     A 1845     Hex Head Stud Assembly     2       62551     A 1846     3/8-16 x 6-1/2     2       60963     A -1847     Y-13 x 1 FH SCS     4       60963     A -1848     3/8-16 x 6-1/2     2       60963     A -1848     3/8-16 x 6+1/2     2       62301     A -1850 - A     S/8 Belleville Washer     16       62301     A -1851     S/8 X 3/16 Washer     2       62300     A -1855     Stard Assembly     1       62402     A -1855     Stard Assembly     1       26402     A -1856     Motor Center     1       129404     A -1856     Motor Center     1       1301     A -1856     Motor Center     1       13031     A -1856     Drive Gear     2       13031     A -1860     3rd Drive Shaft     1       13034     A 1861     2nd Drive Shaft     1       13034				
21454   A.1842   Entrance   1     56647   A.1845   Hex Head Stud Assembly   2     60951   A.1846   3/8-16 x 6-1/2   2     60953   A.1848   3/8-16 x 1 FH SCS   4     60953   A.1848   3/8-16 x 1 FH SCS   2     60953   A.1849   Opening Roll   1     62341   A.1850 -A   5/8 Belleville Washer   16     62340   A.1852 -A   3/8 Beleville Washer   2     62340   A.1852 -A   3/8 Beleville Washer   2     62402   A.1853   4.1 Tp. Pin   2     62402   A.1854   15 Woodroff Key   3     50010   A.1856   Motor Center   1     80324   A.1856 - A   N.24 Heater Element   2     50910   A.1856   Drive Gear   2     13301   A.1860   3rd Drive Shaft   1     13303   A.1860   3rd Drive Shaft   1     13304   A.1861   20 X1/2 Sq. HSS   2     60680   A.1865   Y-20 x1/2 Sq. HSS   2     60680	14622	A -1838	Sdl. Washer	2
21454   A.1842   Entrance   1     56647   A.1845   Hex Head Stud Assembly   2     60951   A.1846   3/8-16 x 6-1/2   2     60953   A.1848   3/8-16 x 1 FH SCS   4     60953   A.1848   3/8-16 x 1 FH SCS   2     60953   A.1849   Opening Roll   1     62341   A.1850 -A   5/8 Belleville Washer   16     62340   A.1852 -A   3/8 Beleville Washer   2     62340   A.1852 -A   3/8 Beleville Washer   2     62402   A.1853   4.1 Tp. Pin   2     62402   A.1854   15 Woodroff Key   3     50010   A.1856   Motor Center   1     80324   A.1856 - A   N.24 Heater Element   2     50910   A.1856   Drive Gear   2     13301   A.1860   3rd Drive Shaft   1     13303   A.1860   3rd Drive Shaft   1     13304   A.1861   20 X1/2 Sq. HSS   2     60680   A.1865   Y-20 x1/2 Sq. HSS   2     60680	00450	4 4040	1/ 40 - 4 01/00	
56647     A.1845     Hex Head Stud Assembly     2       62551     A.1846     3/8-16 x 6-1/2     2       60954     A.1847     ½-13 x 1 FH SCS     4       60953     A.1848     3/8-16 x 1 FH SCS     2       10103     A.1849     Opening Roll     1       62341     A.1850 - A     5/8 Belleville Washer     16       62081     A.1851     5/8 x 3/16 Washer     2       62340     A.1852 - A     3/8 Beleville Washer     24       62700     A.1855     Stard Assembly     1       264202     A.1855     Stard Assembly     1       29010     A.1856     Motor Center     1       80324     A.1856 - A     N.24 Heater Element     2       1301     A.1857     Cover Assembly     1     1       1303     A.1860     3rd Drive Shaft     1     1       1303     A.1860     3rd Drive Shaft     1     1       13033     A.1861     2     2     2       66425     A.1863 <t< td=""><td></td><td></td><td></td><td></td></t<>				
62551     A -1846     3/8-16 x 6-1/2     2       60954     A -1847     ½-13 x 1 FH SCS     4       60953     A -1848     3/8-16 x 1 FH SCS     2       11036     A -1849     Opening Roll     1       62341     A -1850 -A     5/8 Belleville Washer     16       62081     A -1851     5/8 x 3/16 Washer     2       62340     A -1852 -A     3/8 Beleville Washer     2       62340     A -1852 -A     3/8 Beleville Washer     2       62402     A -1853     4-1 Tpr. Pin     2       26402     A -1855     Stard Assembly     1       29404     A -1856     Motor Center     1       80324     A -1856     Drive Gear     2       13301     A -1861     2nd Drive Shaft     1       13303     A -1862     3/8 x 0.82 Washer     2       13304     A -1863     TT-1709 1 Thrust Bearing     3       13004     A -1865     ½ x 0.02 K42 S     2       60425     A -1866     ½ A 2 x47 SSS     2				
60954     A - 1847     ½-13 x 1 FH SCS     4       60953     A - 1848     3/8-16 x 1 FH SCS     2       11036     A - 1849     Opening Roll     1       62341     A - 1851     5/8 Belleville Washer     16       62081     A - 1852 -A     3/8 Beleville Washer     24       62700     A - 1852 -A     3/8 Beleville Washer     24       62700     A - 1855     Stard Assembly     1       26402     A - 1855     Stard Assembly     1       26404     A - 1855     Motor Base     2       80100     A - 1856 - A     N.24 Heater Element     2       60910     A - 1856 - A     N.24 Heater Element     2       13010     A - 1856     Motor Center     1       13033     A - 1860     3rd Drive Shaft     1       13030     A - 1861     2nd Drive Shaft     1       13030     A - 1861     2nd Drive Shaft     1       13030     A - 1865     ½-20 x1/2 Sq. HSS     2       60425     A - 1864     3/8 - 16 Am Nut SF <td></td> <td></td> <td></td> <td></td>				
60953     A. 1848     3/8-16 x.1 FH SCS     2       11036     A. 1849     Opening Roll     1       62341     A. 1851     5/8 Belleville Washer     16       62081     A. 1851     5/8 Belleville Washer     2       62340     A. 1852     A. 38     Beleville Washer     2       62340     A. 1853     4-1 Tpr. Pin     2     2       62402     A. 1853     4-1 Tpr. Pin     2     2       62402     A. 1855     Stard Assembly     1     3       50010     A. 1855-B     Motor Base     2     2       80100     A. 1856     Motor Center     1     1       13031     A. 1856<-A	62551	A -1846	3/8-16 x 6-1/2	2
60953     A. 1848     3/8-16 x.1 FH SCS     2       11036     A. 1849     Opening Roll     1       62341     A. 1851     5/8 Belleville Washer     16       62081     A. 1851     5/8 Belleville Washer     2       62340     A. 1852     A. 38     Beleville Washer     2       62340     A. 1853     4-1 Tpr. Pin     2     2       62402     A. 1853     4-1 Tpr. Pin     2     2       62402     A. 1855     Stard Assembly     1     3       50010     A. 1855-B     Motor Base     2     2       80100     A. 1856     Motor Center     1     1       13031     A. 1856<-A	600F4	A 1047		4
11036   A-1849   Opening Roll   1     62341   A-1850 - A   5/8 Belleville Washer   16     62081   A-1851   5/8 X/16 Washer   2     62340   A-1851   3/8 Beleville Washer   2     62700   A-1853   4-1 Tpr. Pin   2     62402   A-1854   15 Woodroff Key   3     50010   A-1855   Stard Assembly   1     28404   A-1856   Motor Center   1     80324   A-1856 - A   N. 24 Heater Element   2     50910   A-1857   Cover Assembly   1     14301   A-1857   Cover Assembly   1     14301   A-1857   Cover Assembly   1     13301   A-1860   3rd Drive Shaft   1     13303   A-1860   3rd Drive Shaft   1     13303   A-1865   ½-20 x1/2 Sq. HSS   2     60680   A-1865   ½-20 x1/2 Sq. HSS   2     60750   A-1865   ½-20 x1/2 Sq. HSS   2     60750   A-1865   ½-20 x1/2 Sq. HSS   2     60875				
62341     A-1850 - A     5/8 Belleville Washer     16       62340     A-1851     5/8 x 3/16 Washer     2       62340     A-1852 - A     3/8 Beleville Washer     2       62340     A-1852 - A     3/8 Beleville Washer     2       62402     A-1853     15 Woodroff Key     3       50010     A-1855 - B     Motor Base     2       80100     A-1856     Motor Center     1       80324     A-1856 - A     N. 24 Heater Element     2       50910     A-1857     Cover Assembly     1       14301     A-1858     Drive Gear     2       13301     A-1860     3rd Drive Shaft     1       13303     A-1860     3rd Drive Shaft     1       13303     A-1860     3rd Drive Shaft     1       13304     A-1862     38 x. 082 Washer     2       60425     A-1862     38 x. 082 Washer     2       60426     A-1864     3/8-16 x 3/8 SS     2       60750     A-1866     2 HP 3 60 36 145     1  <				
62081     A -1851     5/8 x 3/16 Washer     2       62340     A -1852 -A     3/8 Beleville Washer     24       62700     A -1853     4 -1 Tpr. Pin     2       62402     A -1854     15 Woodroff Key     3       50010     A -1855     Btard Assembly     1       29404     A -1856     Motor Base     2       80100     A -1856     Motor Center     1       180324     A -1856 -A     N. 24 Heater Element     2       50910     A -1857     Cover Assembly     1       14301     A -1858     Drive Gear     2       13303     A -1860     3rd Drive Shaft     1       13304     A -1861     2nd Drive Shaft     1       13303     A -1862     3/8 x .082 Washer     2       66425     A -1863     TT-1709 1 Thrust Bearing     3       60680     A -1865     2/c0 x1/2 Sq. HSS     2       60750     A -1865     2/c0 x1/2 Sq. HSS     2       60750     A -1865     2/dex x1/8 S     1 <t< td=""><td></td><td></td><td></td><td>-</td></t<>				-
62340     A -1852 - A     3/8 Beleville Washer     24       62700     A -1853     4-1 Tpr. Pin     2       62402     A -1853     45 Tpr. Pin     2       62402     A -1855     Stard Assembly     1       29404     A -1855     Motor Base     2       80100     A -1856     Motor Center     1       1     A-1856     Motor Center     1       80324     A -1856     Drive Gear     2       14301     A -1857     Cover Assembly     1       14301     A -1858     1*     1       13303     A -1860     3rd Drive Shaft     1       13303     A -1860     3rd Drive Shaft     1       13303     A -1860     3rd SSS     2       66425     A -1862     38 x.082 Washer     2       66425     A -1862     38 x.082 Washer     2       60680     A -1864     3/8-16 x 3/8 SS     2       60750     A -1865     4-20 x1/2 Sq. HSS     2       60750     A -1866				
62700     A -1853     4-1 Tpr. Pin     2       62402     A -1854     15 Woodroff Key     3       50010     A -1855     Stard Assembly     1       29404     A -1855     Motor Base     2       80100     A -1856     Motor Center     1       180324     A -1856     Motor Center     1       1301     A -1857     Cover Assembly     1       1430     A -1858     Drive Gear     2       13301     A -1860     3rd Drive Shaft     1       13303     A -1860     3rd Drive Shaft     1       13304     A -1862     3/8 x.082 Washer     2       66425     A -1863     TT-1709 1 Thrust Bearing     3       60680     A -1865     ¼-20 x1/2 Sq. HSS     2       60750     A -1865     ¼-20 x1/2 Sq. HSS     2       60750     A -1867     3/8 -16 x1 CB     6       80061     A -1867     3/8 -16 x1 CB     6       80422     A -1869     BX Connector 3/4     1       60755	62081	A -1851	5/8 x 3/16 Washer	2
62700     A -1853     4-1 Tpr. Pin     2       62402     A -1854     15 Woodroff Key     3       50010     A -1855     Stard Assembly     1       29404     A -1855     Motor Base     2       80100     A -1856     Motor Center     1       180324     A -1856     Motor Center     1       1301     A -1857     Cover Assembly     1       1430     A -1858     Drive Gear     2       13301     A -1860     3rd Drive Shaft     1       13303     A -1860     3rd Drive Shaft     1       13304     A -1862     3/8 x.082 Washer     2       66425     A -1863     TT-1709 1 Thrust Bearing     3       60680     A -1865     ¼-20 x1/2 Sq. HSS     2       60750     A -1865     ¼-20 x1/2 Sq. HSS     2       60750     A -1867     3/8 -16 x1 CB     6       80061     A -1867     3/8 -16 x1 CB     6       80422     A -1869     BX Connector 3/4     1       60755	00040	A 1950 A	2/9 Bolovillo Machar	04
62402     A-1854     15 Woodroff Key     3       50010     A-1855     Stard Assembly     1       29404     A-1855-B     Motor Base     2       80100     A-1855     Motor Center     1       80324     A-1855-B     Motor Center     1       80324     A-1857     Cover Assembly     1       14301     A-1857     Cover Assembly     1       14301     A-1858     Drive Gear     2       13303     A-1860     3rd Drive Shaft     1       13304     A-1861     2nd Drive Shaft     1       6425     A-1863     TT-1709 1 Thrust Bearing     3       60680     A-1865     ¼-20 x1/2 Sq. HSS     2       60750     A-1867     3/8-16 HN Hvy. SF     6       61130     A-1867     3/8-16 Jam Nut SF     2       60875				
50010     A-1855     Stard Assembly     1       29404     A-1855-B     Motor Base     2       80100     A-1856     Motor Center     1       80324     A-1856     N. 24 Heater Element     2       50910     A-1857     Cover Assembly     1       14301     A-1858     Drive Gear     2       13301     A-1859     1 <sup>st</sup> Dive Shaft     1       13303     A-1860     3rd Drive Shaft     1     1       13303     A-1860     3rd Drive Shaft     1     1       13303     A-1862     3/8 x.082 Washer     2     2       66425     A-1862     3/8 x.082 Washer     2     2       66426     A-1867     3/8-16 x 3/8 SS     2     2       60750     A-1867     3/8-16 L3 3/8 SS     2     2       60750     A-1867     3/8-16 HN Hvy. SF     6     6       61130     A-1867     3/8-16 Jam Nut SF     2     3       60875     A-1868     3/8-16 X 1 CB     6				
29404     A -1855 -B     Motor Base     2       80100     A -1856     Motor Center     1       80324     A -1856 -A     N. 24 Heater Element     2       50910     A -1857     Cover Assembly     1       14301     A-1858     Drive Gear     2       13301     A -1859     1 <sup>st</sup> Dive Shaft     1       13303     A -1860     3rd Drive Shaft     1     1       13304     A -1861     2nd Drive Shaft     1     1       66425     A -1862     3/8 x .082 Washer     2     2       66426     A -1863     TT-1709 1 Thrust Bearing     3     3       60750     A -1865     ¼-20 x1/2 Sq. HSS     2     2       60750     A -1865     ¼-20 x1/2 Sq. HSS     2     2       60750     A -1865     ¼-20 x1/2 Sq. HSS     2     2       60750     A -1865     ¼-20 x1/2 Sq. HSS     2     2       60875     A -1867     3/8-16 x1 CB     6     1       80422     A -1867				
80100     A -1856     Motor Center     1       80324     A -1856 - A     N. 24 Heater Element     2       50910     A -1857     Cover Assembly     1       14301     A -1859     1 <sup>st</sup> . Dive Shaft     1       13303     A -1859     1 <sup>st</sup> . Dive Shaft     1       13304     A -1860     3rd Drive Shaft     1       13303     A -1860     3rd Drive Shaft     1       13304     A -1861     2nd Drive Shift     1       13304     A -1861     2nd Drive Shift     1       66425     A -1861     3/8 -16 x 3/8 SS     2       66680     A -1865     ½-20 x1/2 Sq. HSS     2       80061     A -1866     2 HP 3 60 36 145     1       61120     A -1866     2 HP 3 60 36 145     1       61130     A -1867     3/8-16 HN Hvy. SF     6       60875     A -1868     3/8-16 x 1 CB     6       80422     A -1868     3/8-16 x 1 CB     1       60875     A -1870     BX Cable 12 3 66     1				
80324   A-1856 - A   N. 24 Heater Element   2     50910   A-1857   Cover Assembly   1     14301   A-1858   Drive Gear   2     13303   A-1859   1 <sup>st</sup> . Dive Shaft   1     13303   A-1860   3rd Drive Shaft   1     13304   A-1861   2nd Drive Shift   1     6425   A-1862   3/8 x.082 Washer   2     66425   A-1864   3/8-16 x 3/8 SS   2     60680   A-1864   3/8-16 x 3/8 SS   2     60750   A-1865   1/2-20 x1/2 Sq. HSS   2     80061   A-1866   2 HP 3 60 36 145   1     61120   A-1867   3/8-16 Jam Nut SF   2     60875   A-1868   3/8-16 Jam Nut SF   2     60875   A-1868   3/8-16 IN INV.   2     60875   A-1869   BX Cable 12 3 66   1     80422   A-1869   BX Cable 12 3 66   1     80480   A-1872   4-3/16 Drive Screw TP-U Cad.   4     66600   A-1875-A   886L Female Coupling   7	29404	А -1855 -В	Motor Base	2
80324   A-1856 - A   N. 24 Heater Element   2     50910   A-1857   Cover Assembly   1     14301   A-1858   Drive Gear   2     13303   A-1859   1 <sup>st</sup> . Dive Shaft   1     13303   A-1860   3rd Drive Shaft   1     13304   A-1861   2nd Drive Shift   1     6425   A-1862   3/8 x.082 Washer   2     66425   A-1864   3/8-16 x 3/8 SS   2     60680   A-1864   3/8-16 x 3/8 SS   2     60750   A-1865   1/2-20 x1/2 Sq. HSS   2     80061   A-1866   2 HP 3 60 36 145   1     61120   A-1867   3/8-16 Jam Nut SF   2     60875   A-1868   3/8-16 Jam Nut SF   2     60875   A-1868   3/8-16 IN INV.   2     60875   A-1869   BX Cable 12 3 66   1     80422   A-1869   BX Cable 12 3 66   1     80480   A-1872   4-3/16 Drive Screw TP-U Cad.   4     66600   A-1875-A   886L Female Coupling   7	80100	A 1856	Motor Contor	1
50910     A -1857     Cover Assembly     1       14301     A-1858     Drive Gear     2       13301     A -1859     1 <sup>st</sup> . Dive Shaft     1       13303     A -1860     3rd Drive Shaft     1       13304     A -1860     3rd Drive Shaft     1       13304     A -1861     2nd Drive Shaft     1       13304     A -1862     3/8 x .082 Washer     2       66425     A-1862     3/8 x .082 Washer     2       66425     A-1864     3/8-16 x 3/8 SS     2       60680     A -1865     ½-20 x1/2 Sq. HSS     2       60750     A -1865     ½-20 x1/2 Sq. HSS     2       80061     A -1867     3/8-16 HN Hvy. SF     6       61130     A-1867 -A     3/8-16 Jam Nut SF     2       60875     A -1868     3/8-16 x 1 CB     6       80422     A -1869     BX Connector 3/4     1       60795     A -1872     4-3/16 Dirve Screw TP-U Cad.     4       62653     A-1874     3/8 x 1 Dwl.     2 <t< td=""><td></td><td></td><td></td><td></td></t<>				
14301   A-1858   Drive Gear   2     13301   A-1859   1 <sup>st</sup> . Dive Shaft   1     13303   A-1860   3rd Drive Shaft   1     13304   A-1861   2nd Drive Shaft   1     13304   A-1861   2nd Drive Shaft   1     13304   A-1861   2nd Drive Shift   1     13304   A-1862   3/8 x .082 Washer   2     66425   A-1863   TT-1709 1 Thrust Bearing   3     60680   A-1865   ½-20 x1/2 Sq. HSS   2     60750   A-1865   ½-20 x1/2 Sq. HSS   2     80061   A-1866   2 HP 3 60 36 145   1     61120   A-1867   3/8-16 HN Hvy. SF   6     61130   A-1867   3/8-16 x 1 CB   6     80422   A-1868   3/8-16 x 1 CB   1     80422   A-1869   BX Coble 12 3 66   1     80480   A-1872   4-3/16 Drive Screw TP-U Cad.   4     66600   A-1872   4-3/16 Drive Screw TP-U Cad.   4     66600   A-1875-A   886L Female Coupling   7				
13301   A -1859   1 <sup>st</sup> . Dive Shaft   1     13303   A -1860   3rd Drive Shaft   1     13303   A -1860   3rd Drive Shaft   1     13303   A -1861   2nd Drive Shift   1     13304   A -1862   3/8 x .082 Washer   2     66425   A -1863   TT-1709 1 Thrust Bearing   3     60680   A -1864   3/8-16 x 3/8 SSS   2     60750   A -1865   ¼-20 x1/2 Sq. HSS   2     60750   A -1865   ¼-20 x1/2 Sq. HSS   2     80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A 1867 -A   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80422   A -1869   BX Cable 12 3 66   1     80422   A -1869   BX Cable 12 3 66   1     80422   A -1870   BX Connector 3/4   1     66600   A -1875   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7				
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$				
13304   A - 1861   2nd Drive Shift   1     62027   A - 1862   3/8 x .082 Washer   2     66425   A - 1863   TT - 1709 1 Thrust Bearing   3     60680   A - 1864   3/8 - 16 x 3/8 SSS   2     60750   A - 1865   ¼ - 20 x1/2 Sq. HSS   2     80061   A - 1865   ¼ - 20 x1/2 Sq. HSS   2     80061   A - 1866   2 HP 3 60 36 145   1     61120   A - 1867   3/8 - 16 HN Hvy. SF   6     61130   A - 1867   3/8 - 16 Jam Nut SF   2     60875   A - 1868   3/8 - 16 x 1 CB   6     80422   A - 1869   BX Cable 12 3 66   1     80480   A - 1870   BX Connector 3/4   1     60795   A - 1870   BX Connector 3/4   1     60600   A - 1877   3/8 x 1 Dwl.   2     66600   A - 1875-A   886L Female Coupling   7     66610   A - 1875-B   888L Halt Union   7     32902   A - 1875-C   Lube Connector Holder   1     66600   A - 1875-F   Nyla Tubing 4	13301	A - 1659	T. Dive Shart	I
13304   A - 1861   2nd Drive Shift   1     62027   A - 1862   3/8 x .082 Washer   2     66425   A - 1863   TT - 1709 1 Thrust Bearing   3     60680   A - 1864   3/8 - 16 x 3/8 SSS   2     60750   A - 1865   ¼ - 20 x1/2 Sq. HSS   2     80061   A - 1865   ¼ - 20 x1/2 Sq. HSS   2     80061   A - 1866   2 HP 3 60 36 145   1     61120   A - 1867   3/8 - 16 HN Hvy. SF   6     61130   A - 1867   3/8 - 16 Jam Nut SF   2     60875   A - 1868   3/8 - 16 x 1 CB   6     80422   A - 1869   BX Cable 12 3 66   1     80480   A - 1870   BX Connector 3/4   1     60795   A - 1870   BX Connector 3/4   1     60600   A - 1877   3/8 x 1 Dwl.   2     66600   A - 1875-A   886L Female Coupling   7     66610   A - 1875-B   888L Halt Union   7     32902   A - 1875-C   Lube Connector Holder   1     66600   A - 1875-F   Nyla Tubing 4	13303	A -1860	3rd Drive Shaft	1
62027   A - 1862   3/8 x .082 Washer   2     66425   A - 1863   TT - 1709 1 Thrust Bearing   3     60680   A - 1864   3/8 - 16 x 3/8 SSS   2     60750   A - 1865   ½ - 20 x1/2 Sq. HSS   2     80061   A - 1866   2 HP 3 60 36 145   1     61120   A - 1867   3/8 - 16 HN Hvy. SF   6     61130   A - 1867   3/8 - 16 Jam Nut SF   2     60875   A - 1868   3/8 - 16 x 1 CB   6     80422   A - 1869   BX Cable 12 3 66   1     80480   A - 1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A - 1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A - 1875-A   886L Female Coupling   7     66600   A - 1875-C   Lube Connector Holder   1     1   Libe Connector Holder   1   1     66600   A - 1875-C   Lube Connector Holder   1     66600   A - 1875-F   Nyla Tubing 4 & 5   60     66700   A - 1875-F   Nyla Tubing 3 & 19   57     60877   A - 1				
66425   A-1863   TT-1709 1 Thrust Bearing   3     60680   A -1864   3/8-16 x 3/8 SSS   2     60750   A -1865   ¼-20 x1/2 Sq. HSS   2     80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 -A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     60877   A -1881   1/2 Lock Washer				
60680   A -1864   3/8-16 x 3/8 SSS   2     60750   A -1865   %-20 x1/2 Sq. HSS   2     80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 -A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60755   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A -1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     60877   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS				
60750   A -1865   ¼-20 x1/2 Sq. HSS   2     80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 x1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     60807   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				2
80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 -A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 Jam Nut SF   2     60875   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A -1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	00000			-
80061   A -1866   2 HP 3 60 36 145   1     61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 -A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 Jam Nut SF   2     60875   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A -1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	60750	A -1865	¼-20 x1/2 Sq. HSS	2
61120   A -1867   3/8-16 HN Hvy. SF   6     61130   A-1867 -A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     60877   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	80061	A -1866		
61130   A-1867 - A   3/8-16 Jam Nut SF   2     60875   A -1868   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	61120	A -1867		6
60875   A -1868   3/8-16 x 1 CB   6     80422   A -1869   BX Cable 12 3 66   1     80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     66610   A -1875-C   Lube Connector Holder   1     66650   A -1875-C   Lube Connector Holder   1     66650   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     66610   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-FE   Nyla Tubing 4 & 5   60     66700   A -1875-FF   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
80480   A -1870   BX Connector 3/4   1     60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     66610   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-FE   Nyla Tubing 4 & 5   60     66700   A -1875-FF   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
60795   A -1872   4-3/16 Drive Screw TP-U Cad.   4     62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     66610   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				1
62633   A-1874   3/8 x 1 Dwl.   2     66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-F   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	80480	A -1870	BX Connector 3/4	
66600   A -1875-A   886L Female Coupling   7     66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	60795	A -1872	4-3/16 Drive Screw TP-U Cad.	
66610   A -1875-B   888L Halt Union   7     32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     666700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				2
32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     66700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	66600	A -1875-A	886L Female Coupling	7
32902   A -1875-C   Lube Connector Holder   1     66650   A -1875-D   Angle Body   1     66700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2	00010			_
66650   A -1875-D   Angle Body   1     66700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
66700   A -1875-E   Nyla Tubing 4 & 5   60     66700   A -1875-F   Nyla Tubing 3 & 19   57     60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
66700     A -1875-F     Nyla Tubing 3 & 19     57       60877     A -1877     3/8-16 x 1-3/4 CB     2       62364     A -1881     1/2 Lock Washer     33       60000     A -1882     1/4-20 x 1/2 HHCS     2				
60877   A -1877   3/8-16 x 1-3/4 CB   2     62364   A -1881   1/2 Lock Washer   33     60000   A -1882   1/4-20 x 1/2 HHCS   2				
62364A -18811/2 Lock Washer3360000A -18821/4-20 x 1/2 HHCS2	66700	A -1875-F	Nyla Tubing 3 & 19	57
62364A -18811/2 Lock Washer3360000A -18821/4-20 x 1/2 HHCS2	60877	A -1877	3/8-16 x 1-3/4 CB	2
60000 A -1882 1/4-20 x 1/2 HHCS 2				
	01001			-

62029	A -1884	3/8 x 1/16 SSHR	12
*60551	A -1887	1/4-20 x ½ RHMS	4
*60048		5/16-18 x 1- 1/4 HHCS	4
*60575		10-24 x 3/8 RHMS	4
*60797		4-1/4 Drive Screw	4
*61040		10-24 HN	4
*61101		5/16-18 NH Hvy SF	4
*61010		5/16 x 1-1/16 Washer	8
*62205		1 x .62 Brks. Washer	3
*62362		5/16 Lock Washer MeD.	4
*80483		BX Connector 3/8	1
*80602		Rg. Tng. Terminal	3
*85156		Lockformer Cap Name Plate	1
*85164		Lookformer Logo	1
*85402		Crate	1

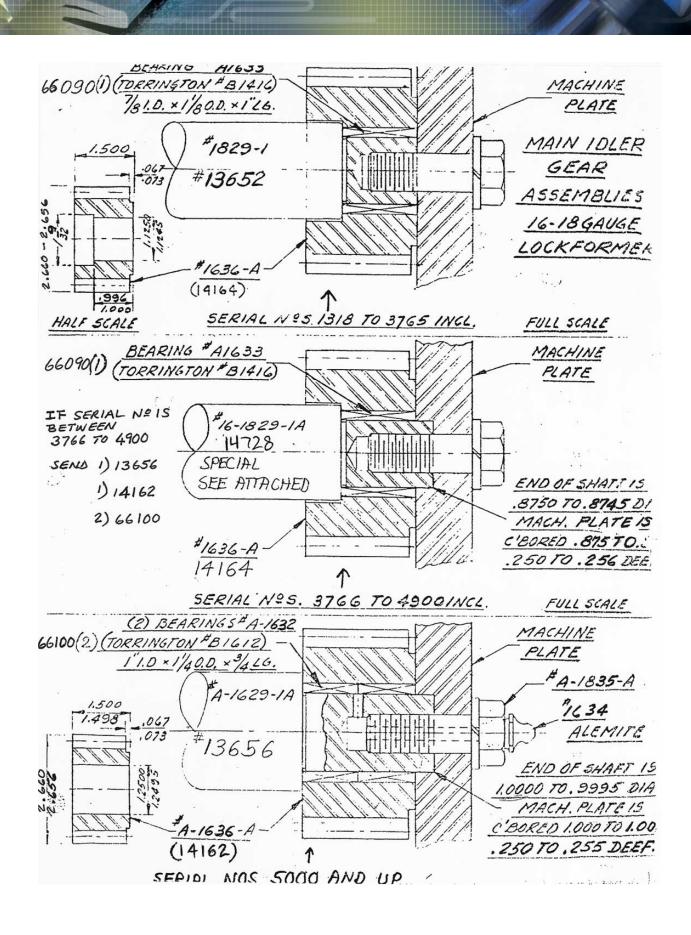

# LOCKFORMER

The Lockformer® Company 711 Ogden Avenue Lisle, Illinois 60532-1399

Phone: (630) 964-8000 Fax: (630) 964 5685 www.lockformer.com Due to continuous improvements, Lockformer\* reserves the right to modify the product design and specifications contained herein without notice. Please contact your Lockformer\* sales representative for the most current specification information.

Use, publication or sale of any images or content without the expressed written consent of Lockformer® is strictly prohibited.

© Copyright 2008. All rights reserved by Lockformer\*