
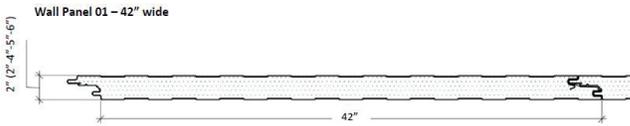


MESA WALL - IMP WALL PANEL

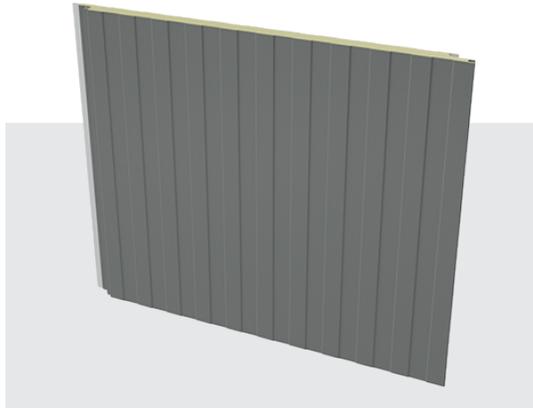

The mesa insulated metal wall panel is ideal for industrial, commercial and cold storage buildings. This wall panel can be installed vertically or horizontally and is a strong choice for long length walls.

PRODUCT SPECIFICATIONS

Use: **Wall**
 Coverage: **42" width**
 Length: **8' to 53'**
 Thicknesses: **2", 4", 5", 6"**
 Panel Attachment: **Concealed Fastener with hidden clip system**

Steel Specs

Steel Gauge: **Exterior: 26 or 24**
Interior: 26
 Standard Steel Coating: **PVDF exterior paint finish , G90 galvanized steel substrate**

Insulation Specs

Insulation Material: **Polyurethane Foam Core**

TESTING & CERTIFICATIONS

Mesa insulated metal wall panels supplied by VersaFrame Inc. have been tested in accordance with the following test methods.

- ASTM C518: Thermal Performance (R-Value)
- ASTM E283: Air Leakage
- ASTM E331: Water Penetration
- ASTM E72 & E1592: Structural Strength
- ASTM E84: Surface Burning Characteristics
- CAN/ULC S101: Fire Endurance
- CAN/ULC S102: Surface Burning Characteristics
- NFPA 286: Room Fire Growth

Thermal Performance Properties (R-Values (Imperial) & RSI-Values (Metric))

Tested in accordance with ASTM C518 at 42.5 F (Imperial) & 7.24 C (Metric) mean temp.

Panel Thickness	R-Value (42.5 F Mean)	RSI-Value (7.24 C Mean)
2" (50.8 mm)	16.26	2.86
4" (101.6 mm)	32.52	5.71
5" (127 mm)	40.65	7.14
6" (152.4 mm)	48.78	8.57



Head Office
 VersaFrame Inc.
 2806 - 5th Street
 Nisku, AB
 T9E0H1

TF: 877-463-8256
 PH: 780-979-0325
 FAX: 780-979-8636
 www.versaframe.ca