



MCG-11

MOBILE COMBO TRANSIT MIX PLANT



SUPERIOR DESIGN

228 CU YD/HR PRODUCTION*
LOW MAINTENANCE COSTS
HIGH QUALITY CONCRETE
CONSISTENT BATCHES


RUGGED CONSTRUCTION

FAST SETUP/TEARDOWN
UNITIZED CONSTRUCTION
STANDARD COMPONENTS
DEPENDABLE OPERATION

- The **ERIE MCG-11** Brings High Plant Production To All Of Your Mobile Ready Mix Requirements
- The Rugged Single Piece Mobile Design Allows Quick Setup And Same Day Operations
- Plant Operational Personnel Find All Components Quickly Accessed And Easily Maintained
- Ready Mix Producers Count On The **MCG-11** For The Challenges Of A Competitive Mobile Market

The **ERIE MCG-11** is the right plant for concrete projects & ready mix operations. Sustained production rates over 200 cu yds per hour come in a single mobile travel unit which can quickly be towed to and erected at any jobsite. Reduced maintenance costs provide less down time and greater profitability. The **MCG-11** is the right choice for producers who expect reliability and longevity to come in one package.

MCG-11

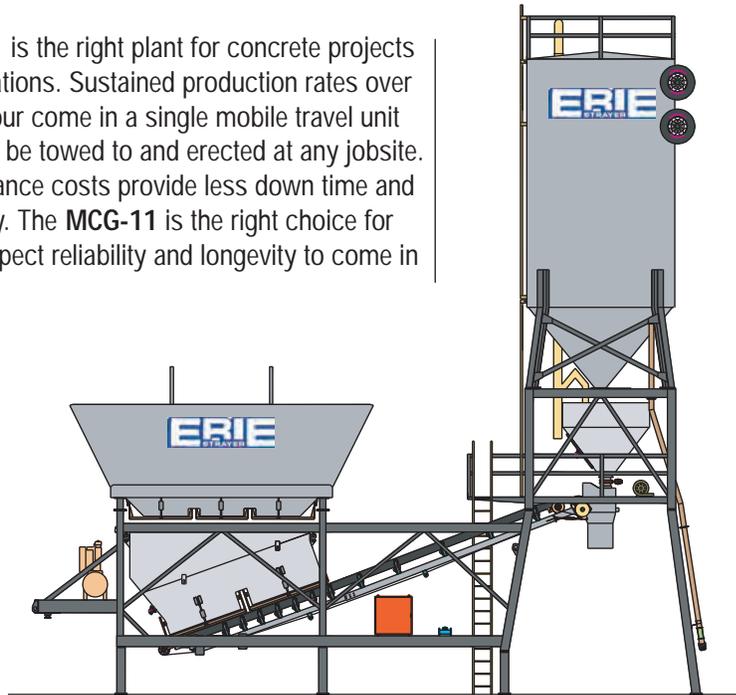

BASE CONFIGURATION**

- Single mobile travel unit
- 20 cubic yard, 3 compartment aggregate bin
- 12 cubic yard aggregate batcher
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- 30" batch transfer conveyor
- 20 HP Dodge TXT 415 shaft mount reducer
- 500 bbl single compartment cement silo
- 4" air loading pipe
- 12 cubic yard cement batcher
- Load cell scale system
- Test weight hangers
- Silent rotary turbine vibrator
- Truck charging chute
- 3" Badger electronic water meter
- 10 HP Ingersoll-Rand air compressor
- Plant motor control panel
- Factory wiring, piping and plumbing
- Manual control panel

OPTIONAL FEATURES**

- 50, 80, 100 and 150 cubic yard aggregate bins
- 2 - 8 aggregate bin compartments
- AR-400 steel and **Erithane** bin and batcher liners
- 36" batch transfer conveyor
- 600 bbl silo
- 2 compartment silos with double wall dividers
- Additional 4" and 5" air loading pipes
- Internal cement silo dust ducts
- 290, 500 and 600 bbl auxiliary cement silos
- 10" and 12" screw conveyors
- Electromagnetic flow water meter
- 15 - 30 HP air compressors
- 4 ½ HP aeration blower
- Plant maintenance platforms
- Access ladders and walkways
- ERIE **Scout** computer control system
- Hydronix **Hydro-Probe II** microwave moisture system
- C&W dust collection systems
- Bin charging conveyors
- Aggregate ground hoppers
- Automatic aggregate handling panels

** Consult factory for complete listing

* Estimated production based on industry standards; consult factory for details

