

PLUMBING NOTES:

1. THE DOMESTIC WATER PIPES OUTSIDE THE BUILDING SHALL BE SCHEDULE 40 PVC.
2. DOMESTIC WATER PIPING INSIDE THE BUILDING SHALL BE TYPE "L" COPPER TUBE. USE LEAD FREE SOLDER. INSTALL ALL PIPING ABOVE THE CEILING. CROSS LINKED POLYETHYLENE (PEX) PLASTIC TUBING CONFORMING TO ASTM F 876, ASTM F 877 MAY BE USED, UNLESS PROHIBITED BY CITY CODES.
3. SANITARY SEWER PIPES AND VENTS SHALL BE SCHEDULE 40 PVC CONFORMING TO ASTM D2665. ASTM F891; ASTM F1488'
4. SANITARY SEWER PIPES 2-1/2" AND SMALLER SHALL BE INSTALLED WITH A MINIMUM OF 1/4" PER FOOT. 3" TO 6" PIPES SHALL BE SLOPED AT 1/8" PER FOOT MINIMUM.
5. PROVIDE FOR EXPANSION IN ALL PIPING.
6. PROVIDE PROPER HANGERS AND SUPPORTS FOR ALL PIPING.
7. PROVIDE ISOLATION VALVES AT EACH PIECE OF EQUIPMENT AND FIXTURES.


PLUMBING PIPE SIZES

DESIGNATION	FIXTURE	HW	CW	VENT SIZE	WASTE SIZE
W.C	WATER CLOSET	-	1"	2"	3"
LAV	LAVATORY	1/2"	1/2"	1 1/2"	1 1/2"
FD	FLOOR DRAIN	-	-	2"	3"
HS	HAND SINK	1/2"	1/2"	1 1/2"	2"
MS	MOP SINK	1/2"	1/2"	1 1/2"	2"

WATER HEATER

DESIGNATION	QUANTITY	TYPE	VOLTAGE	RATING	RECOVERY RATE GPH (50 DEG RISE)	DIMENSIONS WXHxD	MAKE AND MODEL
WH-1,	1	GAS TANKLESS	110/1Ø	199KBTU	460	18.3"x26X10"	RINNAI RU98i

M. En. P. Engineers
Reg.#12249
124 N. Spring Dr. ,
Richardson, TX 75081
972-697-3057
KChishti@aol.com

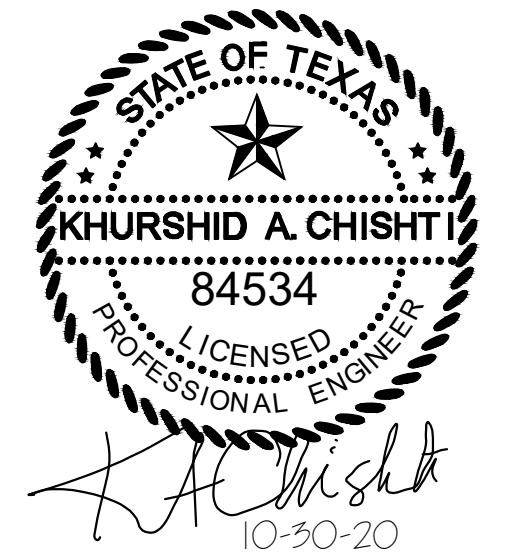

Project

FOODSERVICE EQUIPMENT LAYOUT
RADHA KRISHNA TEMPLE
 1450 N. WATERS ROAD
 ALLEN, TX 75013

ISSUE	DATE	DESCRIPTION

PROJECT NUMBER CM170123

SCALE

DRAWN TCG

DATE 06/05/2020

SHEET DESCRIPTION

**PLUMBING NOTES
& SCHEDULE**

SHEET NUMBER

P2.0