

QIS Wall Switch

Programming Instructions



Read and understand each section before performing required steps
When using a Dual Channel Wall Switch, the left button column corresponds to Channel 1. The right button column corresponds to Channel 2 as shown in the diagram below.

FIRST TIME SETUP


1. **INSTALL SHADE** following appropriate installation instructions
2. **CONNECT POWER SUPPLY** to Power Communication Panel
3. **CONNECT SHADE** to Power Communication Panel using network cable
(Shade will JOG on initial power-up)
4. **CONNECT WALL SWITCH** to Power Communication Panel using network cable

PAIRING / LEARNING WALL SWITCH (or Channel)


1. **PRESS** both **UP** and **PRESET 1** at the same time
(Shade will JOG in response)
2. **TUG** the **HEMBAR 6-10 inches**
(Shade will JOG in response and is now paired)

UNPAIRING / UNLEARNING WALL SWITCH (or Channel)

1. **PRESS** both **DOWN** and **PRESET 2** at the same time
(Shade will JOG in response)
2. **TUG** the **HEMBAR 6-10 inches**
(Shade will JOG in response and is now unpaired)

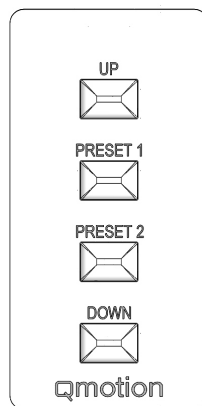

Single Channel Wall Switch

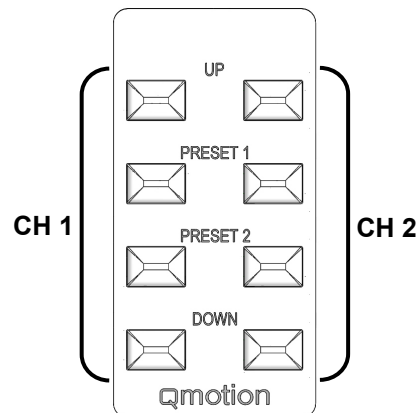

Dual Channel Wall Switch



When learning new positions, the button currently being programmed (after Step 3. TUG) will not send commands to the shade.

Example 1: When learning a new PRESET 1 position, pressing PRESET 1 will do nothing (after Step 3. TUG). The shade can still be adjusted using the UP and DOWN buttons.


Example 2: When learning a new upper limit position, the UP button is semi-disable. Only by pressing the UP button 3 times will the shade move to the up position (or manually roll the shade up by hand). After Step 5 all buttons resume full functionality.

SETTING UPPER AND LOWER LIMITS / LEARNING A NEW POSITION

(Must use paired Wall Switch)

1. **PRESS** the (**UP, DOWN, or PRESET**) button that will be programmed (Shade will move to selected position)
2. **PRESS** and **HOLD** the same (**UP, DOWN, or PRESET**) button **UNTIL** shade **JOGS**
3. **TUG** shade **6-10 inches** (Shade will JOG in response)
4. **ADJUST** shade to desired position (Use **UP/DOWN** buttons or manually adjust shade by hand)
5. **PRESS** and **HOLD** the same (**UP, DOWN, or PRESET**) button (Shade will JOG when learned)

Qadvanced Intelligent System (QIS) System Overview

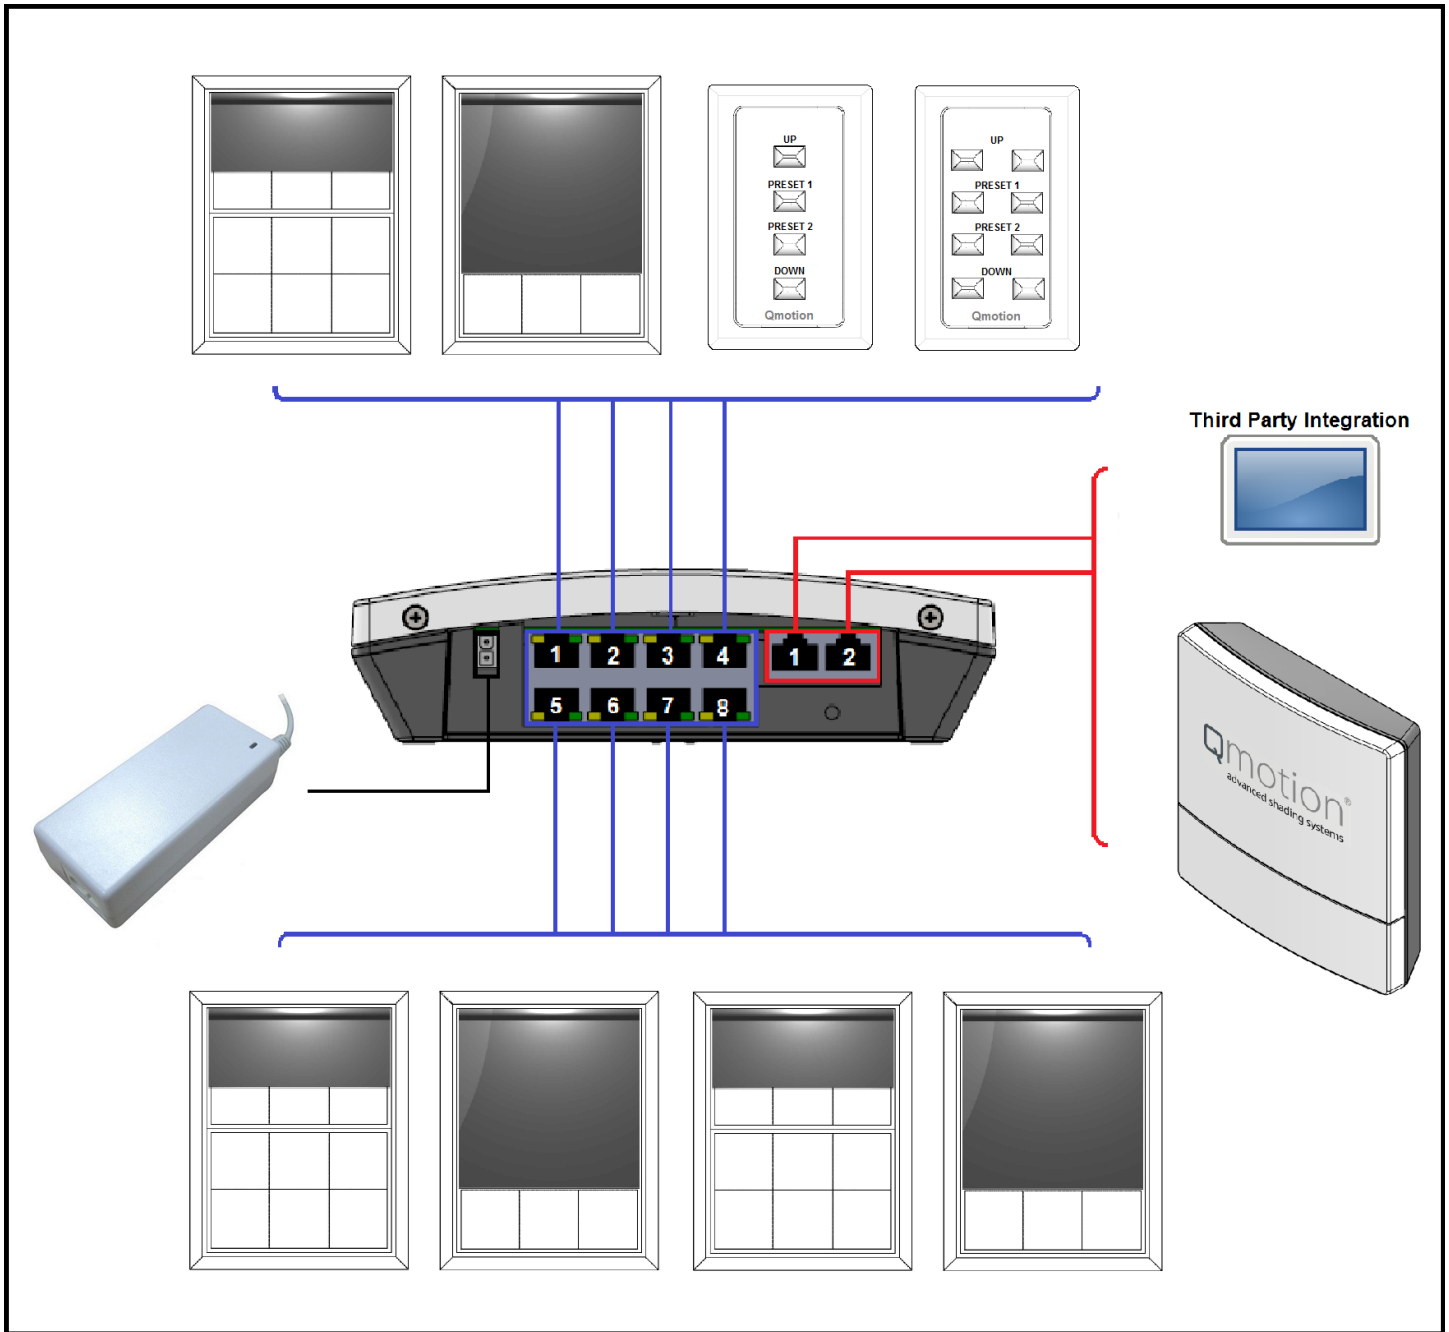

- Power Supply: 24 VDC, 7.5A
- RJ-45 Ports for Motorized Shades and Switches - Quantity 8
- Communication Ports (RJ-45) - Quantity 2

CAT5e or CAT6 Cable Required for Network Connections (RJ-45)