

Xtralis® VESDA® VLP



The Xtralis VESDA VLP detector is the central element of the Xtralis VESDA ASD product range. Using unique detection principles, the VLP has an alarm sensitivity range of 0.0015%–6.25% obscuration/ft (0.005%–20% obscuration/m). The VLP is classed as a “Very Early Warning Smoke Detector”. This means that it detects fire at the earliest possible stage and reliably measures very low to extremely high concentrations of smoke.

How It Works

Air is drawn into the VLP through a network of air sampling pipes by a high efficiency aspirator. Each inlet pipe has an airflow sensor that monitors airflow changes in the pipes. Air is exhausted from the VLP and may be vented back into the protected zone.

Inside the VLP, a sample of air is passed into the laser detection chamber. Ultra-fine air filtration provides very clean air to protect the optical surfaces inside the detector from contamination.

The detection chamber uses a stable Class 1 laser light source and carefully positioned sensors to achieve the optimum response to a vast range of smoke types.

The status of the detector, and all alarm, service and fault events, are transmitted to displays and external systems via VESDAnet.

VESDAnet™

Xtralis VESDA detectors and devices communicate across VESDAnet, the Xtralis VESDA fault-tolerant communications protocol. The VESDAnet loop provides a robust bi-directional communication network between devices, even allowing continued operation during single point wiring failures. It also allows for system programming from a single location and forms the basis of the modular nature of the Xtralis VESDA system.

AutoLearn™

VLP technology employs unique software tools to ensure optimum operation in many differing environments. AutoLearn monitors the ambient environment and sets the most appropriate alarm thresholds (Alert, Action, Fire1, Fire2) during the commissioning process to allow the earliest possible warning of a potential fire situation with reduced nuisance alarms.

Referencing

Environments that employ air handling systems may be affected by pollution external to the controlled environment when “fresh air make up” is added. Referencing by the VLP ensures that external pollution does not interfere with the true smoke level being detected in the protected environment. The system can safely compensate for this transient state and allow continued operation free from such nuisance alarms.

Features

- Wide sensitivity range
- Laser based smoke detection
- 4 configurable alarm levels
- High efficiency aspirator
- Four inlet pipes
- Airflow supervisor per sampling pipe
- Clean air barrier optics protection
- Easy to replace air filter
- 7 programmable relays
- VESDAnet™
- AutoLearn™
- Referencing
- Event log
- Modular design
- Recessed mounting option

Listings/Approvals

- UL
- ULC
- FM
- LPCB
- VdS
- CFE
- ActivFire
- AFNOR
- VNIPO
- CE - EMC and CPD
- EN54-20

Regional approvals listings and regulatory compliance vary between Xtralis VESDA product models. Refer to www.xtralis.com for the latest product approvals matrix.



GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118


Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

www.gamewell-fci.com

GF11641_10 page 1 of 2


Xtralis® VESDA® VLP

Detector Mounting Box

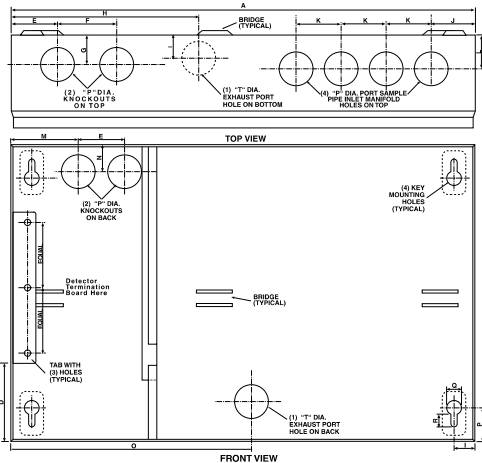

| Dimensions | |
|------------|-----------|
| | in mm |
| A | 13.8 350 |
| B | 8.9 225 |
| C | 2.75 70 |
| D | 2.25 57 |
| E | 1.37 35 |
| F | 1.75 44.5 |
| G | 0.87 22.0 |
| H | 5.56 14.1 |
| I | 0.62 15.9 |
| J | 1.31 33.3 |
| K | 1.33 34 |
| L | 0.94 23.8 |
| M | 2 51 |
| N | 0.83 21 |
| O | 5.56 141 |
| P | 1 25.4 |
| Q | 0.44 11.1 |
| R | 0.37 9.5 |
| S | 1.12 28.5 |
| T | 1.19 30.2 |
| U | 0.125 3.2 |


Detector Termination Card

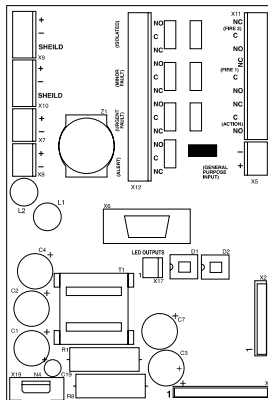

Ordering Information

Xtralis VESDA VLP

VLP-0XX XX (see below)



Remote Programmer
 Recessed Mounting Kit (Optional)
 Hand-held Programmer
 19 in Sub Rack Configuration

VRT-100
 VSP-011
 VHH-1000
 contact Xtralis

Specifications

Supply Voltage: 18–30 VDC

Power Consumption @ 24 VDC:
 No Display or Programmer

| | Aspirator @ 3000 rpm | | Aspirator @ 4200 rpm | |
|---------|----------------------|------------|----------------------|------------|
| | Quiescent | With Alarm | Quiescent | With Alarm |
| Power | 5.8 W | 6.96 W | 8.16 W | 9.36 W |
| Current | 240 mA | 290 mA | 340 mA | 390 mA |

Dimensions (WHD):

13.8 in x 8.9 in x 4.9 in (350 mm x 225 mm x 125 mm)

Weight:

9 lbs (4.0 kg) including Display and Programmer modules

IP Rating: IP30

Operating Conditions:

Tested to: 14°–131°F (-10°C–55°C)

Detector Ambient: 32°–103°F (0°C–39°C) (Recommended)

Sampled Air: -4°–140°F (-20°–60°C)

Humidity: 10%–95% RH, non-condensing

Please consult your Xtralis office for operation outside these parameters or where sampled air is continually above 0.015% obs/ft (0.05% obs/m) under normal operating conditions.

Sampling Network:

Aggregate pipe length: 650 ft (200 m)

Maximum Single Length: 325 ft (100 m)

Pipe Modelling Design Tool: ASPIRE2™

Pipe Size:

External Diameter 1 in (25 mm)

Internal Diameter 9/16 in (~15–21 mm)

Programmable Relays:

7 Relays, Contacts rated 2 A @ 30 VDC NO/NC Contacts

Cable Access:

8 x 1 in (25 mm) knockouts in various positions

Cable Termination:

Screw terminals 30–12 AWG (0.2–2.5 sq mm)

Alarm Sensitivity Range:

0.0015%–6.25% obs/ft (0.005%–20% obs/m)

Alarm Threshold Setting Range:

Alert: 0.0015%–0.6218% obs/ft (0.005%–1.990% obs/m)

Action: 0.0031%–0.6234% obs/ft (0.010%–1.995% obs/m)

Fire 1: 0.0046%–0.625% obs/ft (0.015%–2.00% obs/m)

Fire 2: 0.0062%–6.25% obs/ft (0.020%–20.00% obs/m)*

*Limited to 4% obs/ft (12% obs/m) in UL mode

Event Log:

Up to 18,000 events stored on FIFO basis.

AutoLearn:

Minimum 15 minutes, maximum 15 days. Recommended minimum period 1 day. During AutoLearn thresholds are NOT changed from pre-set values.

Software Features:

Referencing: Compensation for external ambient conditions.

Four Alarm Levels: Alert, Action, Fire 1 & Fire 2.

Two Fault Warning Levels: Maintenance and Major fault.

Software Programmable Relays: 7.

Maintenance Aids: Filter & Flow monitoring.

Event reporting via VESDAnet or Event Log.

www.xtralis.com

The Americas +1 781 740 2223 Asia +852 2297 2438 Australia and New Zealand +61 3 9936 7000

Continental Europe +41 55 285 99 99 UK and the Middle East +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded. This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label. This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis. Doc. no. 11641_10 Part: 18253

