

### Specifications

- Wattage - 224W
- Weight - 24 lbs
- Input Total Power - 255W
- Lumens - 22396@ 4500 Kelvin
- Luminated Area - 20ft: 85ft x 85ft ;24ft : 118ft x 118ft ; 30ft : 138ft x 138ft
- Illuminance Uniformity - >0.6
- Input Voltage - 110/115-220/277
- Input Voltage - ≥90%
- Current - Single 325 mA
- Meanwell Drivers - HLG-240H
- LED Single Power - 1.5W
- Lumen Per Watt - ≥110Lm/W
- Environmental Temperature - 95F~122F
- Lamp Temperature - <122F
- Efficiency - >90%
- CRI - >70
- Power Factor - >0.95
- IP - IP65

### Features





- COOL-LITE MODERN LED FIXTURES are the perfect solution for illuminating any parking area.
- Our high-performance technology is encased in sleek, aesthetically appealing housing, rendering optimum results.
- Five Kelvin options to choose from: 3000k or 3500k, 4000k or 4500k, 5000k for allowing the best choice for each application.
- 5 year warranty.



### Ordering Information

Sensor	Wattage	Kelvin	Voltage	Lens	Colors
SE (Enlighted Sensor)	224W	3k or 3.5k	277V	T2	01 (Gray)
N (Standard)		4k or 4.5k		T3	02 (Brown)
		5k		T5	03 (White)
					04 (Black)
					05 (Bronze)

Photometrics Showing Type-2 & 3 Distribution

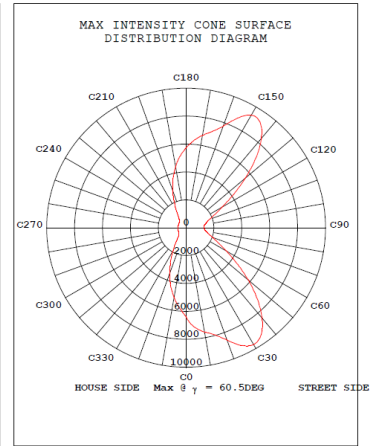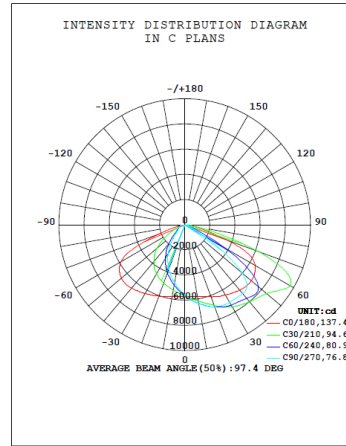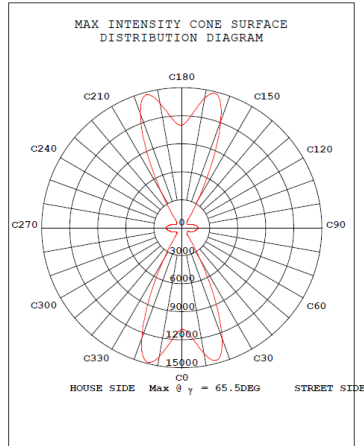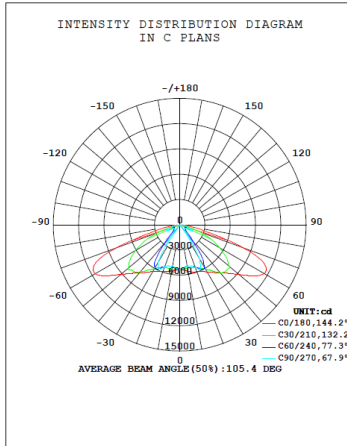



C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: 冯强  
Test Date: 2012-07-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]  
Remarks: 224W GLC-LD04

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: MEDIUM  
Temperature: 25.3DEG  
Operators: Fq  
Test Date: 2015-11-07

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]  
Remarks:

Photometrics Showing Type-5 Distribution

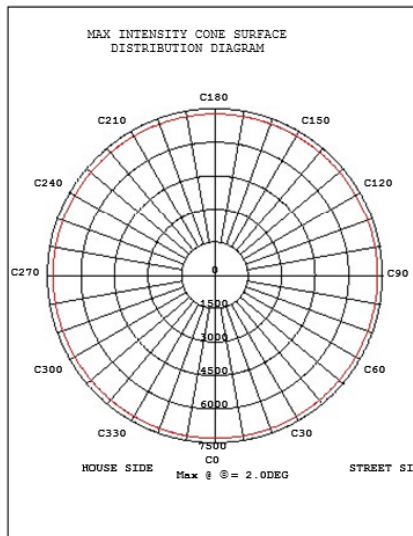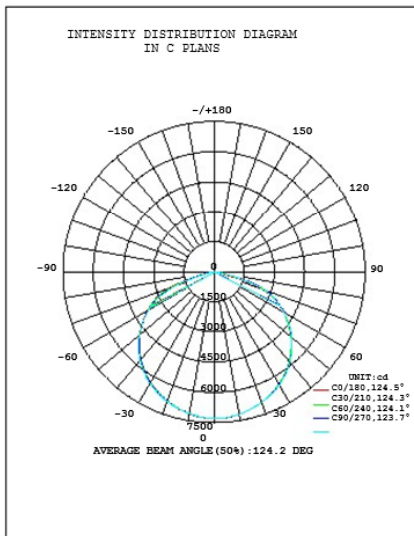

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.262  
Humidity: 65.0%  
Test Distance: 9.970m [K=1.0000]