


Samsung RRH-BRKT-Pole/Wall Mount




Wireless Construction, Inc. 40 Blake Road, Standish ME 04084 Phone: (207) 642-5751 | Fax: (207) 642-5754 www.wcitowers.com

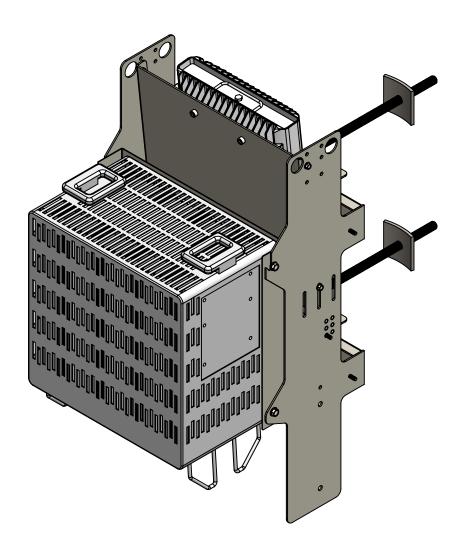

SAMSUNG RRH-BRKT

Pole/Wall Mount

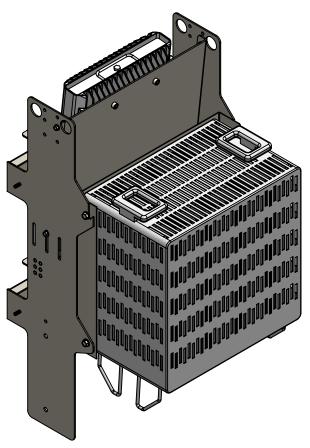

Product Features:


- For use with Samsung Dual-Band Radio Unit and Delta 1.8kw Power Supply
- Compact Size
- Diverse mounting applications; includes concrete lamp post, steel pole, wood pole applications, and wall mountable.
- · Optional grounding locations
- Power supply mounting options with ability to adjust bracket for slight tilt
- Concealment Cover attachment (cover not included in this kit*)
- Kit Includes: (2) Pole Brackets, (1) Power Supply Bracket, (1) Router Bracket, (2) 5/8 x 16" Bolts, (4) 8½ Make a Clamp, Grounding Jumper, and all associated hardware.
- Kit Allows for: Fiber MultiPort, 90Watt Radiohead, Router, and Power Supply

Product Specifications:

Model No: SAMSUNG RRH-BRKT


Dimension (W x H x D) 33 x 13 x 12 (inches)
Weight	16 lbs
Safety	500 lbs Vertical Load Rating
Environment	Galvanized, Weather Resistant
Cooling	Natural Cooling
Mount	Lamp post, pole or wall mountable
Construction	Aluminum/ Steel
Finish	Outdoor Powder Coating/ Natural Color

SAMSUNG RRH-BRKT-Pole/Wall-Mount

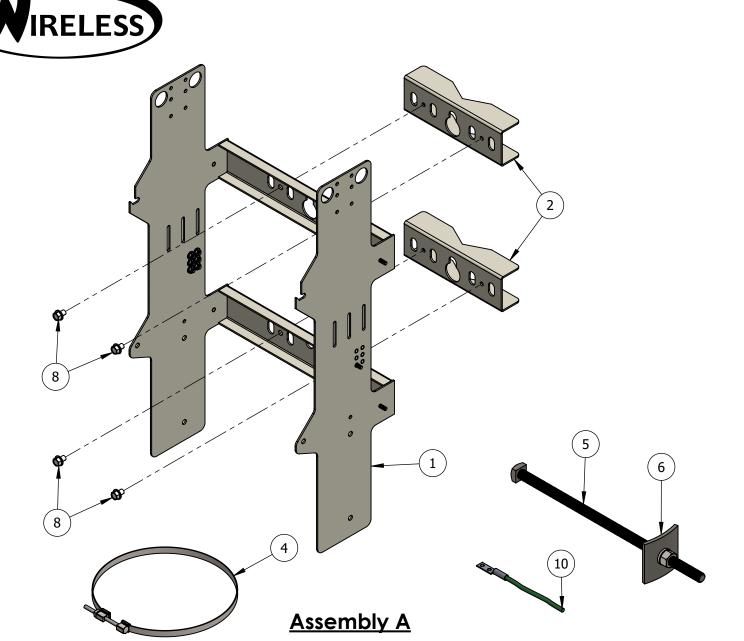

Item	Part Number	Description	Qty	
1	V-726	Main Bracket	1	
2	V-125	Pole Bracket	2	
3	V-727	Power Supply Bracket	1	
4	V-Band	BAB 3848	2	
5	8228	5/8 x 16" Square Headed Bolt	2	
6	233	3"x3"x1/4" Curved Washer	2	
7	V-1420-500	Flange Head Cap Screw 1/4"-20 1/2"lg	4	
8	V-3816-500	Flange Head Cap Screw 3/8"-16 1/2"lg	4	
9	V-1420-FLN	Flange locknut 1/4"-20 (ground bus)	12	
10	V-G-12	12" Ground Jumper	1	
11	V-M635	M6X35 Screw (Supplied with Power Supply)	6	
12	V-728	Radio Bracket	1	
13	V-729	Radio Bracket Spacer	1	
14	V-0516-500	Flange Head Cap Screw 5/16"-18 1/2"lg	4	
	Not Included:			
15	Delta 1.8kW	Delta DC Power Supply	1	
16	Samsung RRH	Samsung Dual Band Radio	1	

SAMSUNG RRH-BRKT-Pole/Wall-Mount

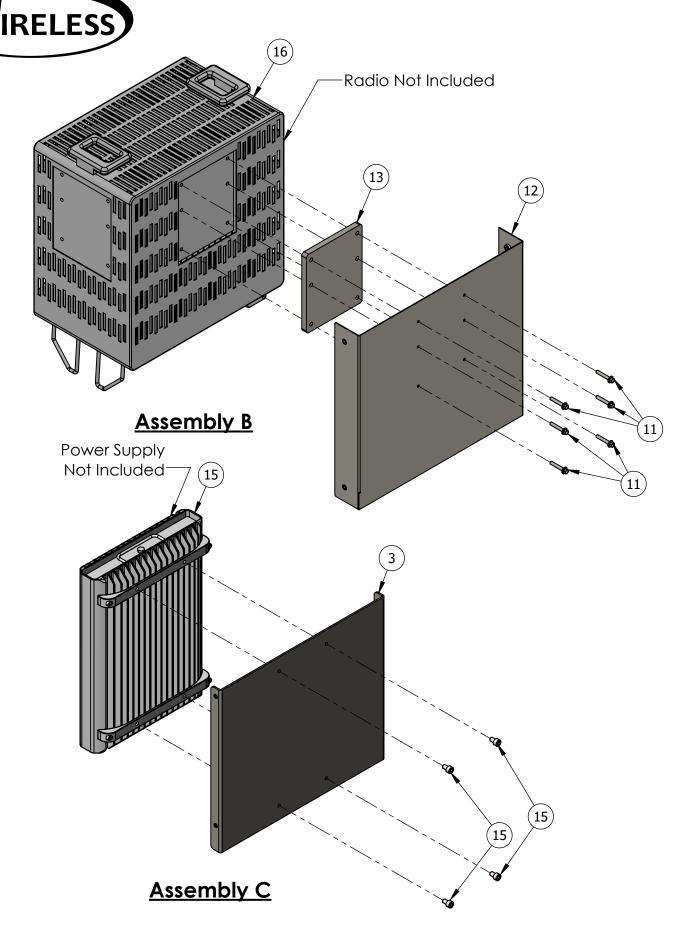

SAMSUNG RRH-BRKT-Pole/Wall-Mount

