



THE DESIGN AND DETAILS DISCLOSED HEREIN ARE THE EXCLUSIVE PROPERTY OF DAN WINTER ARCHITECT AND SHALL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART WITHOUT ITS PRIOR WRITTEN CONSENT.

DAN WINTER, ARCHITECT

# SUBWAY SANDWICH SHOP

2 E. Main St.  
Tuttle, Ok. 73089

DAN WINTER  
ARCHITECT


1024 EAST  
FIRST STREET  
WICHITA, KS.  
67214  
PH. 316-267-7142

SECURITY  
CAMERA PLAN

DATE  
NOV. 19, 2015

DRAWN BY:  
RICK C.  
CHECKED BY:

SHEET NO.  
**A1.3**

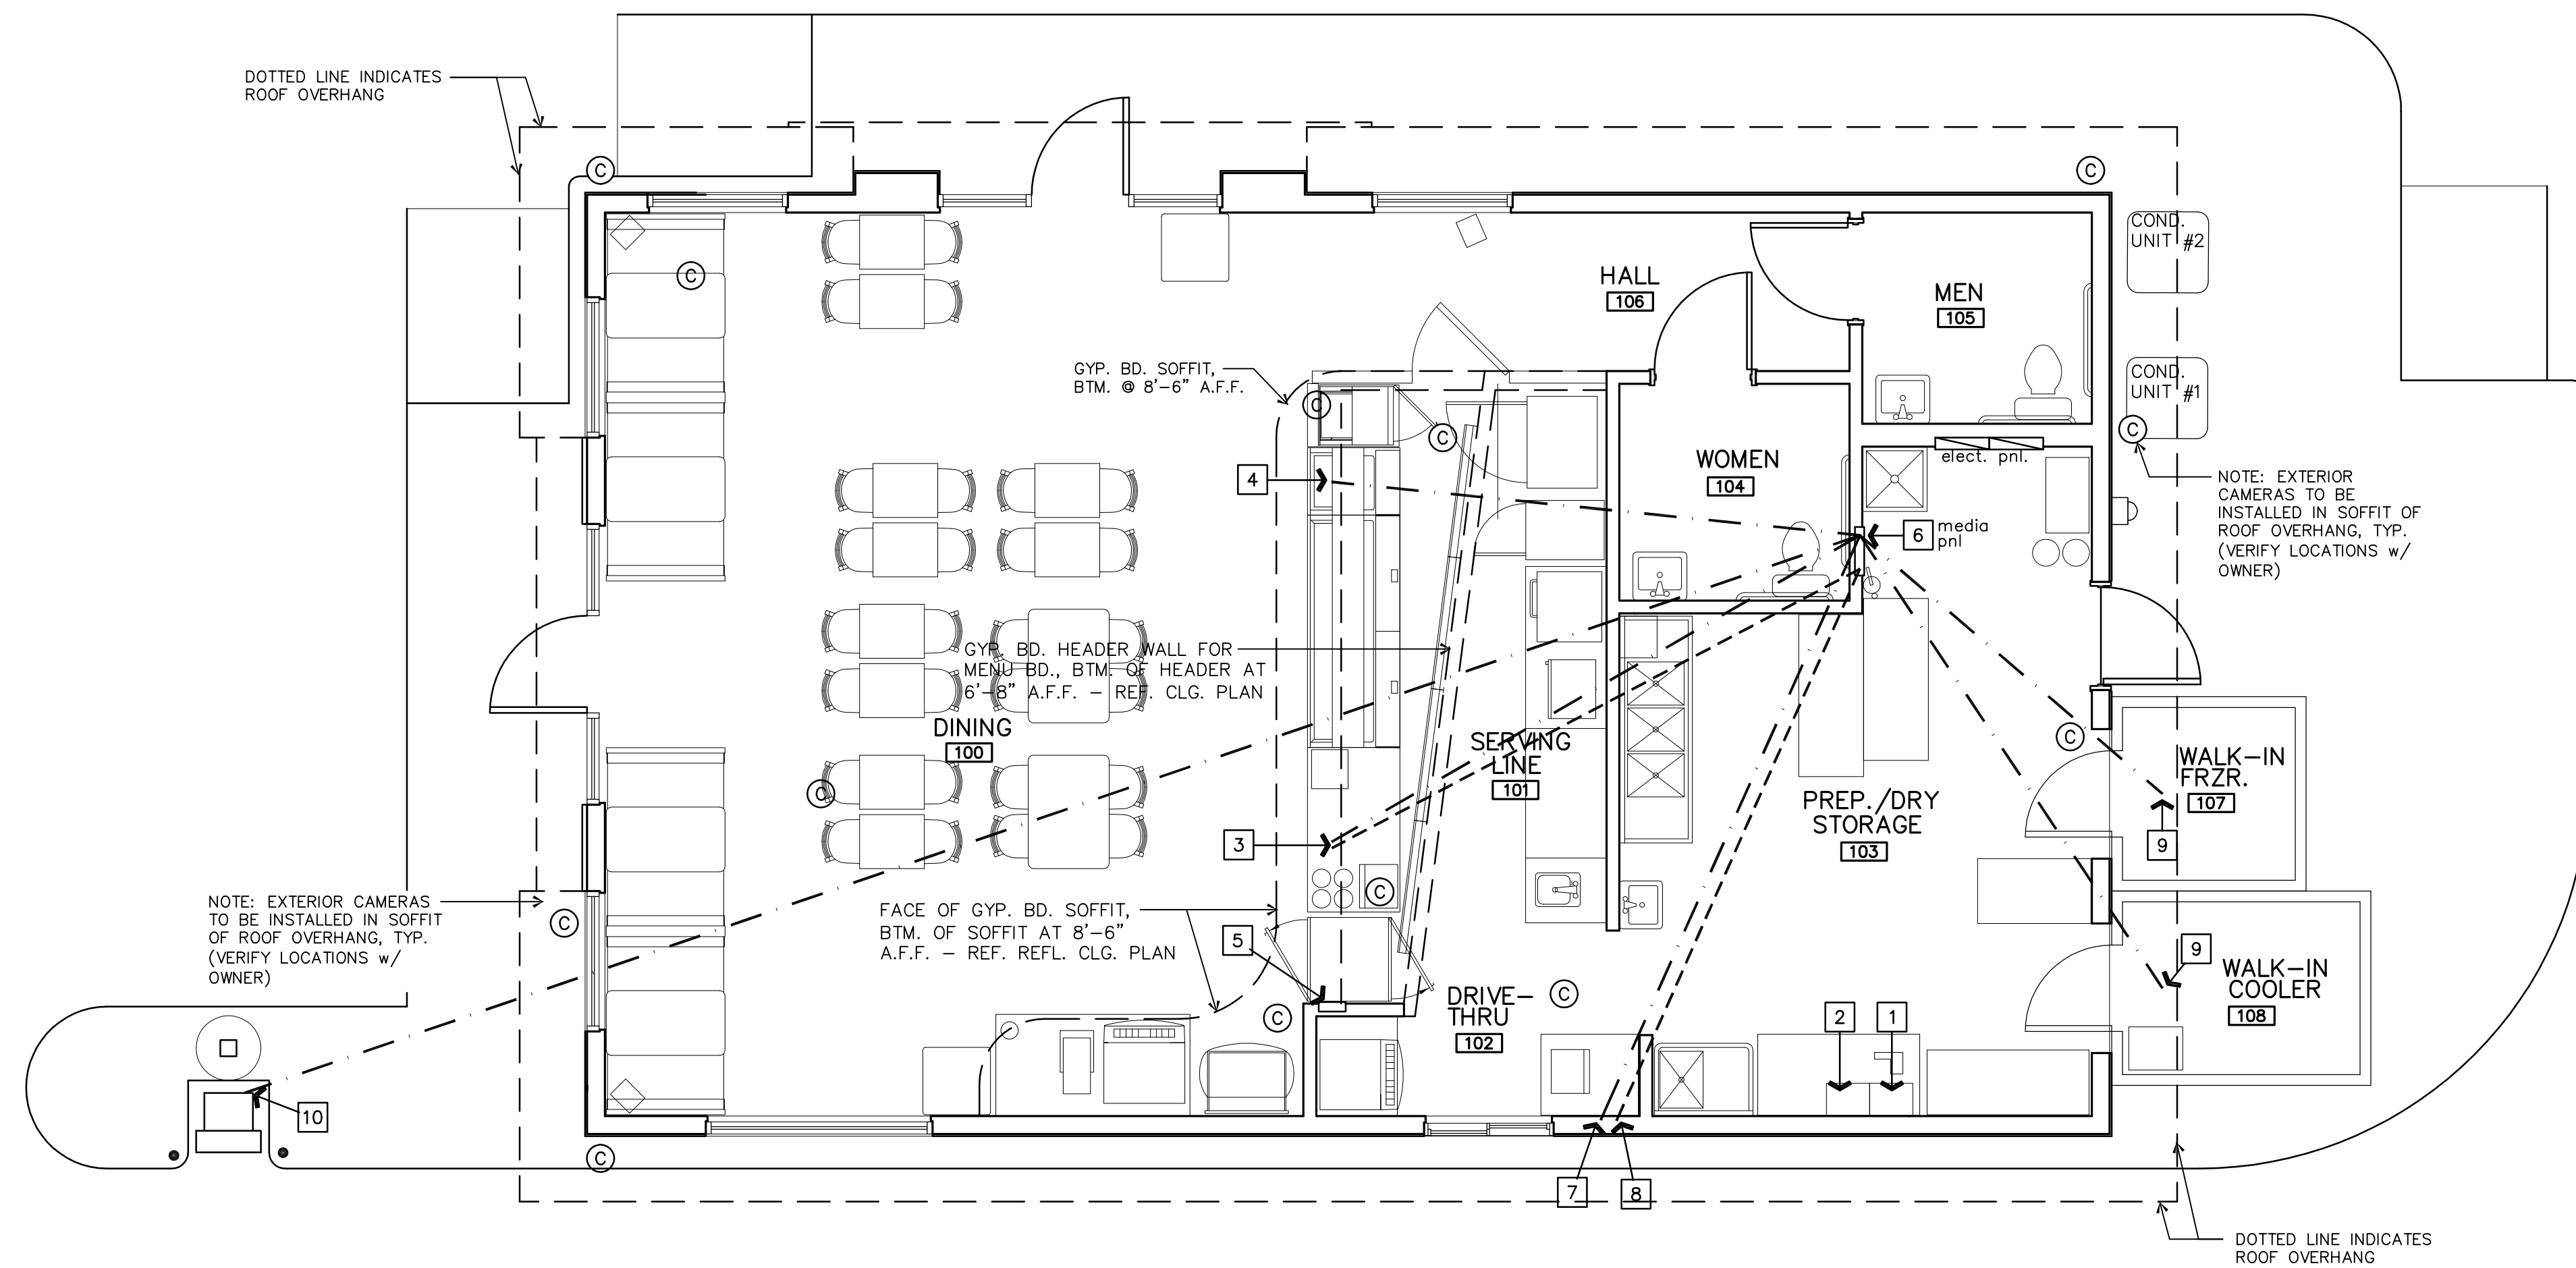

## A SECURITY CAMERA PLAN

1/4" = 1'-0"



NORTH

### LEGEND SYMBOLS

- Ⓢ INTERIOR (CEILING MTD.) / EXTERIOR (SOFFIT MTD.) SECURITY CAMERA

NOTE: SECURITY SYSTEM & CAMERAS (INTERIOR & EXTERIOR) TO BE FURNISHED & INSTALLED 'BY OTHERS'. GEN. CONTR. TO COORDINATE INSTALLATION LOCATIONS & REQUIREMENTS w/ OWNER & SECURITY SYSTEM INSTALLER.

— CAT-5 CABLE — FURNISHED AND INSTALLED BY ELECT. CONTRACTOR. FINAL CONNECTION TO EQUIPMENT TO BE 'BY OTHERS'

--- TELEPHONE LINE --- FURNISHED AND INSTALLED BY ELECT. CONTRACTOR. FINAL CONNECTION TO EQUIPMENT TO BE 'BY OTHERS'

### KEY NOTES ON PLAN:

- WALL MTD. SHELF (FURNISHED & INSTALLED BY GEN. CONTRACTOR) FOR STEREO SYSTEM EQUIP. ('BY OTHERS') MOUNT SHELF AT 7'-6" A.F.F., FIELD VERIFY.
- WALL MTD. SHELF (FURNISHED & INSTALLED BY GEN. CONTRACTOR) FOR SECURITY SYSTEM VIDEO EQUIP. ('BY OTHERS') MOUNT SHELF AT 7'-6" A.F.F., FIELD VERIFY.
- CONDUIT STUBBED UP BELOW COUNTER FOR TELEPHONE, DATA & ELECTRICAL. (1) 3/4" DIA. CONDUIT w/ PULLWIRE FOR TELEPHONE & (1) 3/4" DIA. CONDUIT w/ PULLWIRE FOR CAT-5. REF. ELECT. DRAWINGS FOR ADDITIONAL INFO. & ELECTRICAL REQUIREMENTS.
- CONDUIT STUBBED UP BELOW EQUIPMENT FOR DATA LINE. (1) 3/4" DIA. CONDUIT w/ PULLWIRE FOR CAT-5.
- 'PASS & SEYMOUR' BRAND (OR EQUAL) RECESSED COAX CABLE / ELECT. RECEPTACLE BOX #TV1W (FOR SECURITY SYSTEM MONITOR) TO BE FURNISHED & INSTALLED BY GENERAL CONTRACTOR. ELECTRICAL RECEPTACLES, CONDUIT & WIRING TO BE FURNISHED & INSTALLED BY ELECT. CONTRACTOR. VERIFY EXACT LOCATION & MOUNTING HEIGHT OF RECESSED BOX w/ SUBWAY OWNER. SECURITY SYSTEM EQUIP. & MONITOR TO BE FURNISHED & INSTALLED 'BY OTHERS'. COORDINATE INSTALLATION REQUIREMENTS & ROUTING OF VIDEO CABLE WITH SECURITY SYSTEM PROVIDER.
- 'LEVITON' BRAND RECESSED, 42" STRUCTURED MEDIA ENCLOSURE BOX (FOR TELEPHONE, COAX, DATA LINE DISTRIBUTION) w/ FLUSH MT. DOORS TO BE FURNISHED AND INSTALLED BY ELECT. CONTRACTOR. REF. ELECTRICAL DRAWINGS FOR ADDITIONAL REQUIREMENTS. FURNISH & INSTALL CONDUITS (FROM MEDIA BOX) STUBBED UP FROM FLOOR AT SERVING LINE OR UP TO ABOVE CEILING FOR ROUTING OF DATA / COMMUNICATION WIRING & CABLES. VERIFY ROUTING OF LINES w/ OWNER.
- SINGLE GANG J-BOX AT 58" A.F.F. (w/ COVER PLATE) & 3/4" DIA. CONDUIT STUBBED UP ABOVE CEILING FOR CAT-5 CABLE. J-BOX, FACEPLATE, CONDUIT AND CAT-5 CABLE TO BE FURNISHED AND INSTALLED BY ELECT. CONTRACTOR.
- SINGLE GANG J-BOX AT 58" A.F.F. (w/ COVER PLATE) & 3/4" DIA. CONDUIT STUBBED UP ABOVE CEILING FOR TELEPHONE LINE. J-BOX, FACEPLATE, CONDUIT AND TELEPHONE LINE TO BE FURNISHED AND INSTALLED BY ELECT. CONTRACTOR.
- 3/4" DIA. CONDUIT FROM TOP OF WALK-IN COOLER / FREEZER REFRIGERATION CONTROL MODULE & STUBBED THROUGH EXTERIOR BUILDING WALL & INTO AREA ABOVE LAY-IN CEILING FOR CAT-5 CABLE. CONDUIT AND CAT-5 CABLE TO BE FURNISHED AND INSTALLED BY ELECT. CONTRACTOR. PROVIDE WEATHER TIGHT SEAL AROUND PENETRATION IN EXTERIOR WALL.
- 3/4" DIA. CONDUIT FROM ORDER BOARD KIOSK TO MEDIA PANEL FOR CAT-5 CABLE. FIELD VERIFY LOCATION OF KIOSK & COORDINATE PLACEMENT OF CONDUIT STUB WITH KIOSK MANUFACTURER'S INSTALLATION INSTRUCTIONS. CONDUIT AND CAT-5 CABLE TO BE FURNISHED AND INSTALLED BY ELECT. CONTRACTOR.