



THE DESIGN AND DETAILS DISCLOSED HEREIN ARE THE EXCLUSIVE PROPERTY OF DAN WINTER ARCHITECT AND SHALL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART WITHOUT ITS PRIOR WRITTEN CONSENT.

DAN WINTER, ARCHITECT

# SUBWAY SANDWICH SHOP

2 E. Main St.  
Tuttle, Ok. 73089

DAN WINTER  
ARCHITECT

1024 EAST  
FIRST STREET  
WICHITA, KS.  
67214  
PH. 316-267-7142

## FOUNDATION PLAN


DATE  
NOV. 19, 2015

DRAWN BY:  
APEX  
CHECKED BY:  
BDC

SHEET NO.  
**S1.1**



1600 Baltimore Ave. Suite  
102 Kansas City, MO  
64108  
Ph: 816.421.3222  
Fax: 816.421.1050  
www.apex-engineers.com

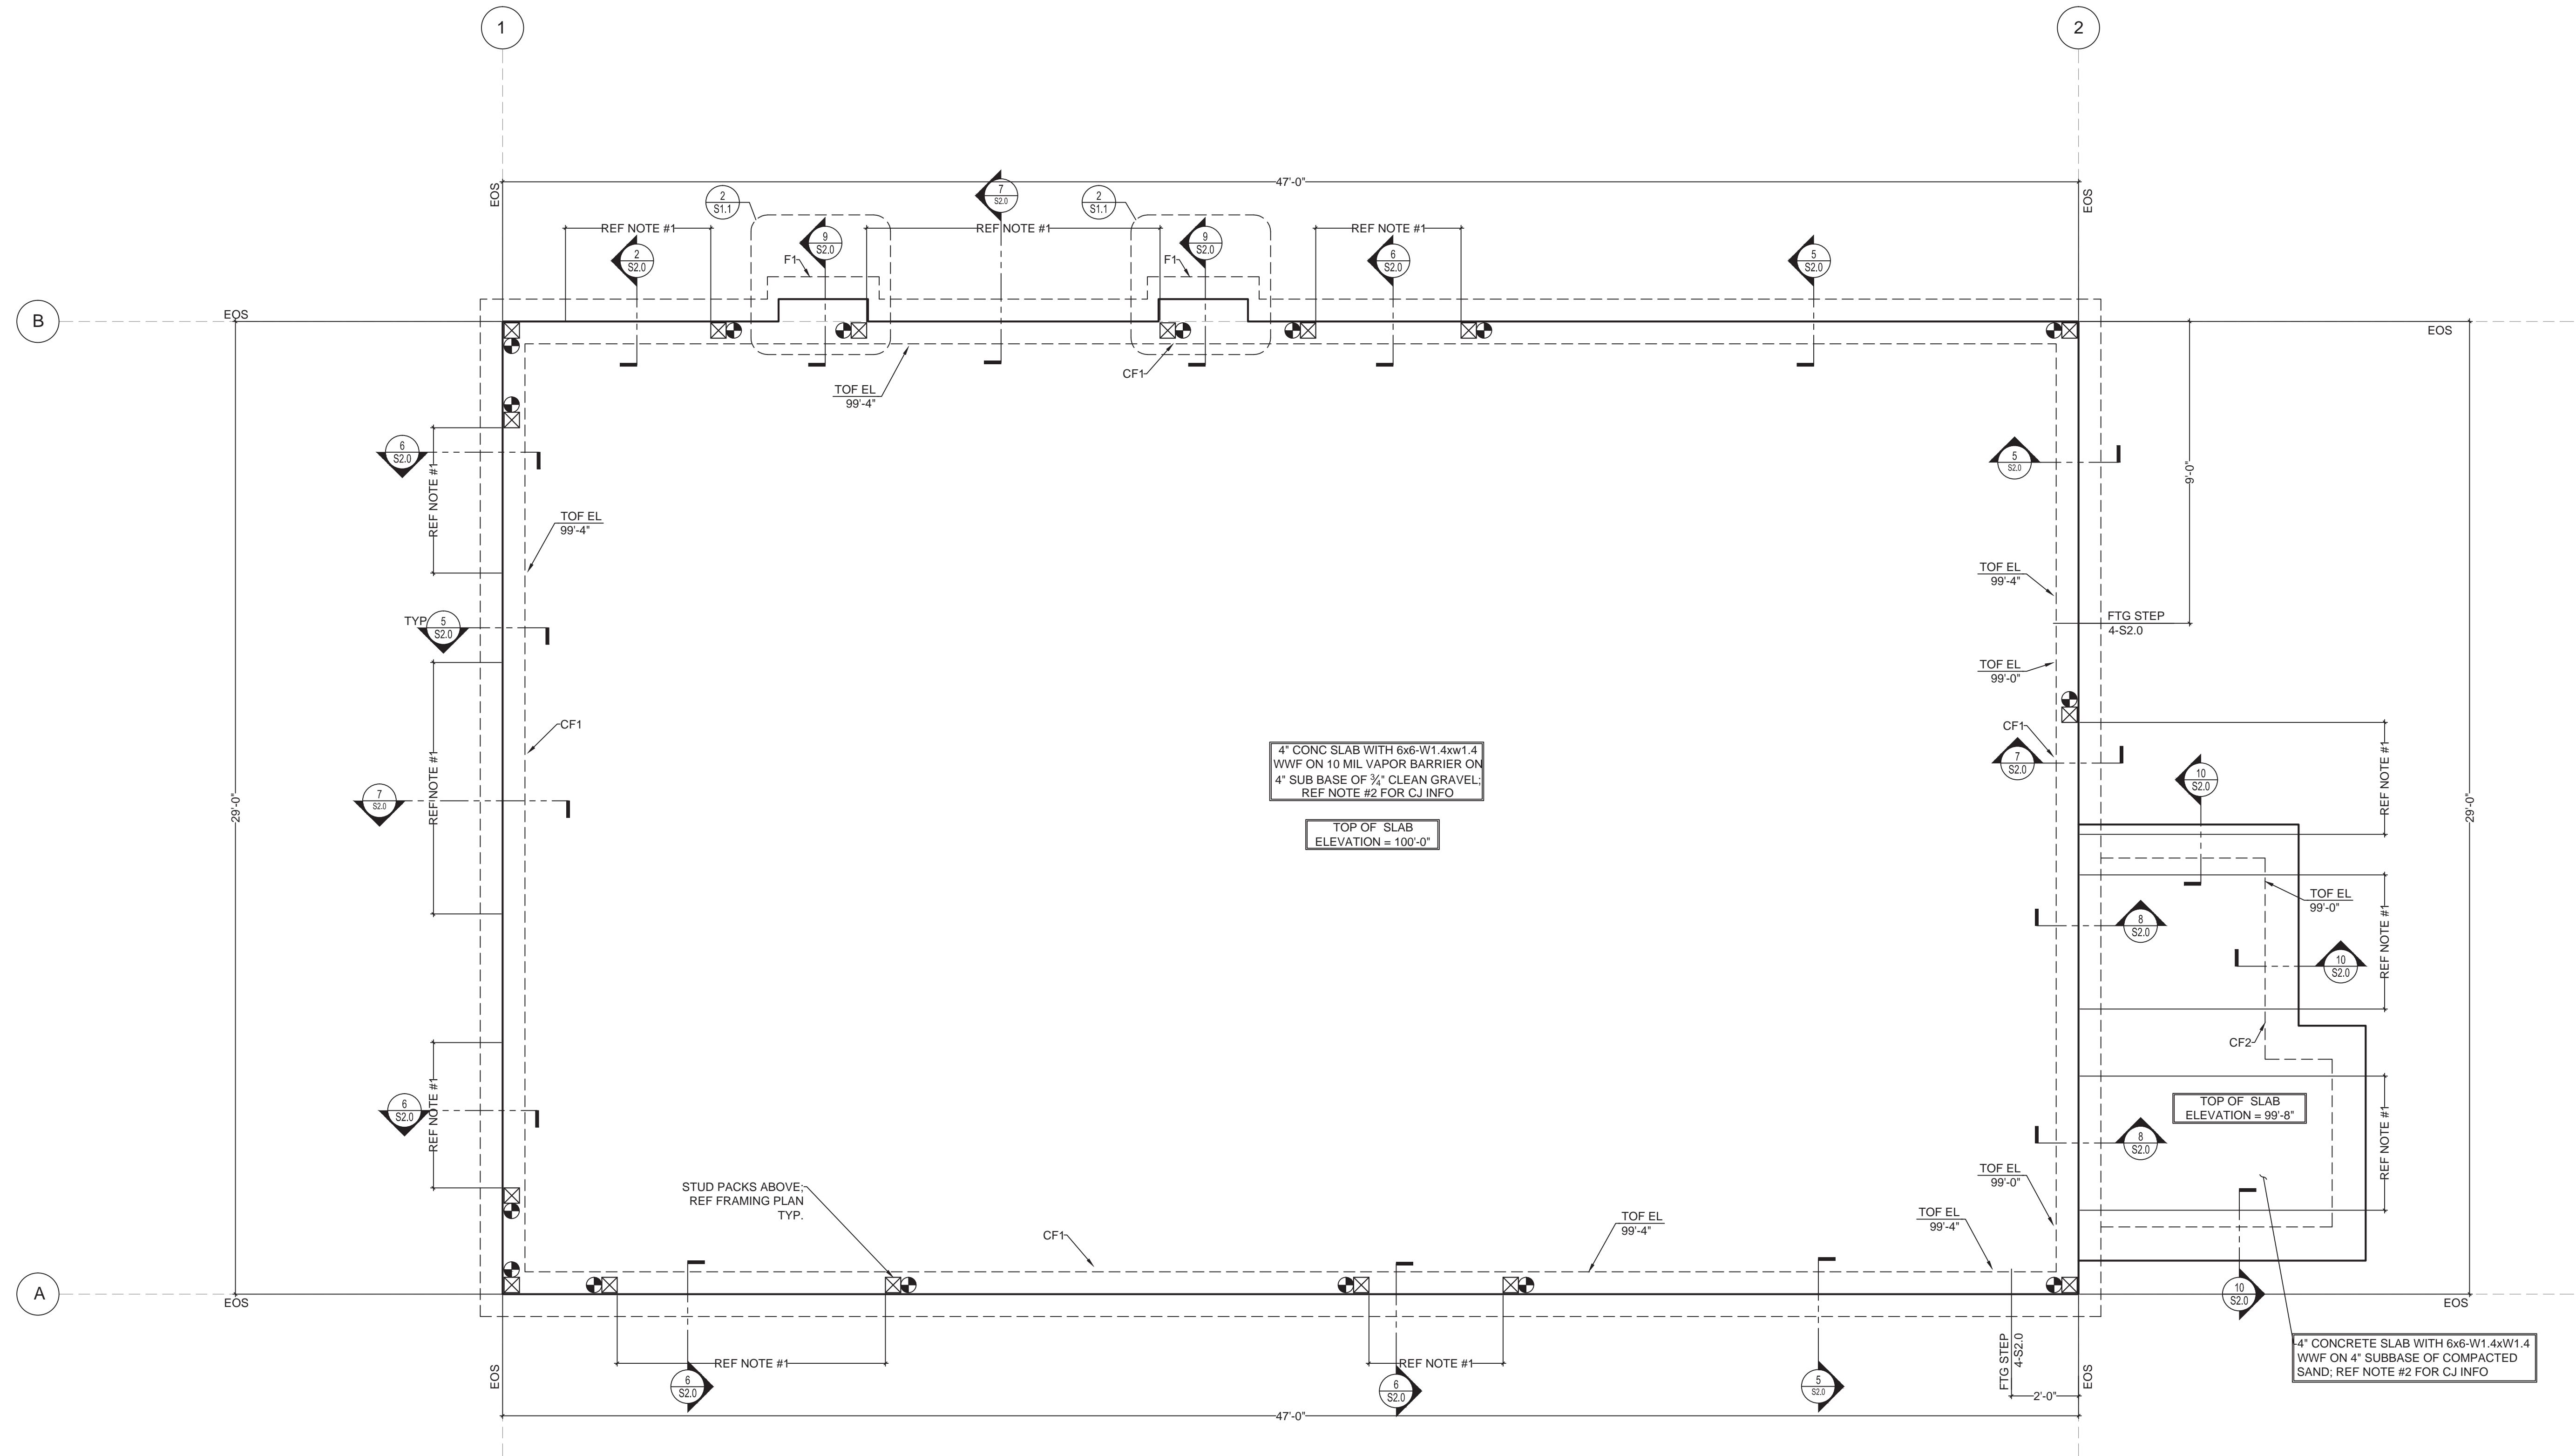

CONTINUOUS FOOTING SCHEDULE		
CONTINUOUS FOOTING MARK	FOOTING SIZE	REINFORCEMENT
CF1	1'-4"x2'-6"xCONT	(4) #5 CONT [(2) T & B]; #3 STIRRUPS AT 18" OC
CF2	1'-0"x2'-6"xCONT	(3) #5 CONT; #3 VERT BARS AT 18" OC
SPREAD FOOTING SCHEDULE		
SPREAD FOOTING MARK	FOOTING SIZE	REINFORCEMENT
F1	2'-0"x3'-4"x2'-6"	(6) #5 CONT [(3) T & B]; (4) #4 VERT BARS

### FOUNDATION PLAN NOTES

1. CONTRACTOR IS RESPONSIBLE FOR COORDINATING WALL OPENING WIDTH, HEIGHT, AND LOCATION WITH ARCHITECT OF RECORD'S CONTRACT DOCUMENTS.
2. CONTROL JOINTS AT 10'-0" OC MAX. EACH WAY (NOT SHOWN FOR CLARITY).
3. = HOLD-DOWN ANCHOR LOCATION (REF. BRACED WALL DETAIL SHEET S4.0).
4. CONTRACTOR TO FIELD VERIFY ALL FOUNDATION ELEVATIONS AND STEP FOUNDATION PER SITE CONDITIONS.
5. SEE SHEET S1.0 FOR ADDITIONAL STRUCTURAL SPECIFICATIONS.
6. REF ARCH FOR ALL DIMENSIONS, EXTERIOR FINISHES AND ADDITIONAL NOTES.

