

LED Annunciators

5865-3 / 5865-4

5865-3 and 5865-4 LED annunciators provide 30 programmable LEDs (15 red, 15 yellow) for maximum flexibility with the Farenhyt fire alarm control panel. The 5865-3 fits into a standard 3-gang electrical box and the 5865-4 fits into a standard 4-gang electrical box. The annunciators are covered by semi-transparent labels and a cover plate. Up to eight 5865 series annunciators can be used with the FACP. The 5865-3 provides alarm and trouble annunciation for 15 zones while the 5865-4 adds reset and silence input switches for even more versatility.

Features


- 30 programmable LED outputs (15 red and 15 yellow)
- Up to 8 5865s can be used on one panel
- Fit into a standard 3- or 4-gang electrical box
- Comes with four semi-transparent labels that can be typed or printed on
- DIP switch addressable
- Connects to FACP SBUS.
- Both modules UL 864 listed; comply with NFPA 72
- 4-wire connection to FACP SBUS
- MEA Approved 429-92-E, Vol 9
- CSFM Approved
- FM Approved

Specifications


Operating Voltage:	24 VDC
Standby Current:	35 mA
Alarm Current:	145 mA
Ambient Temperature:	32°F to 120°F (0°C to 49°C)
Mounting:	5665-3: 3-gang electrical box 5665-4: 4-gang electrical box

Agency Listings

MEA
429-92-E,
Vol. 9

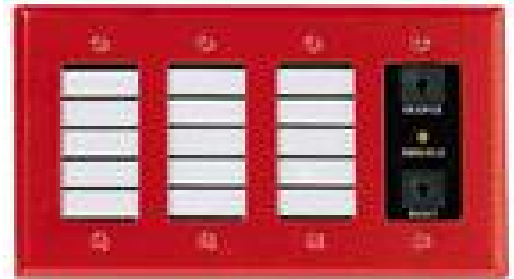

5865-4

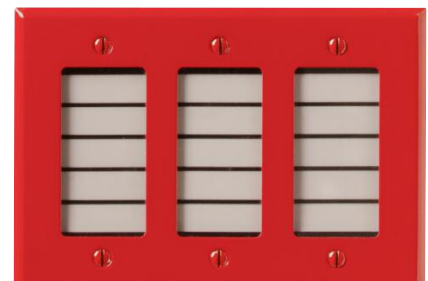

5865-3


Compatible Control Panels

The 5865-3 and 5865-4 are compatible with the following FACPs:

- IFP-2000 / IFP-2000ECS / RPS-2000
- IFP-1000 / IFP-1000ECS
- IFP-100 / IFP-100ECS
- IFP-50


5865-3

5865-4

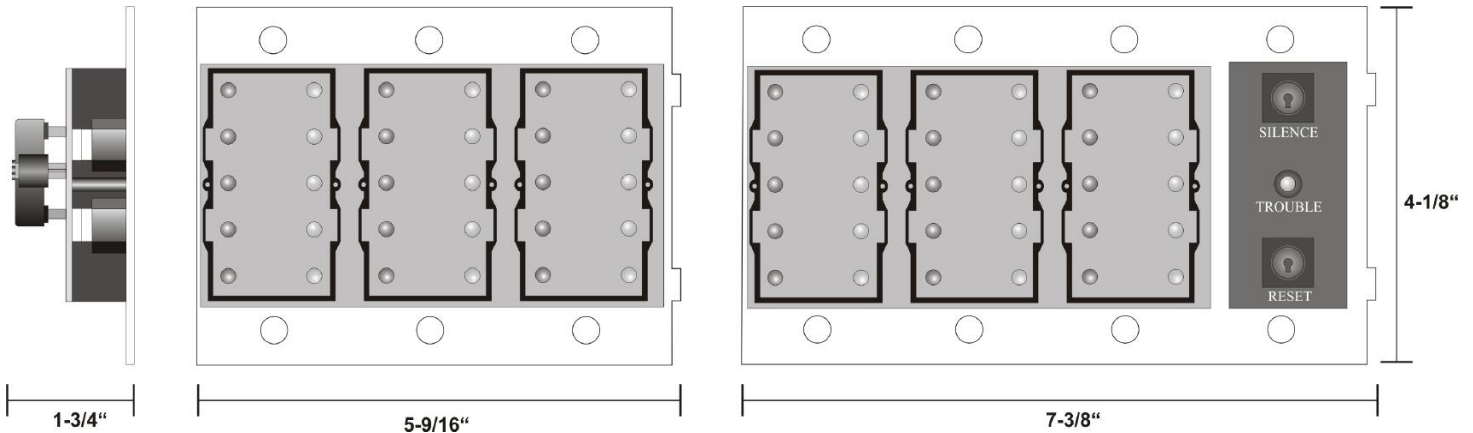

Dimensions

FACP

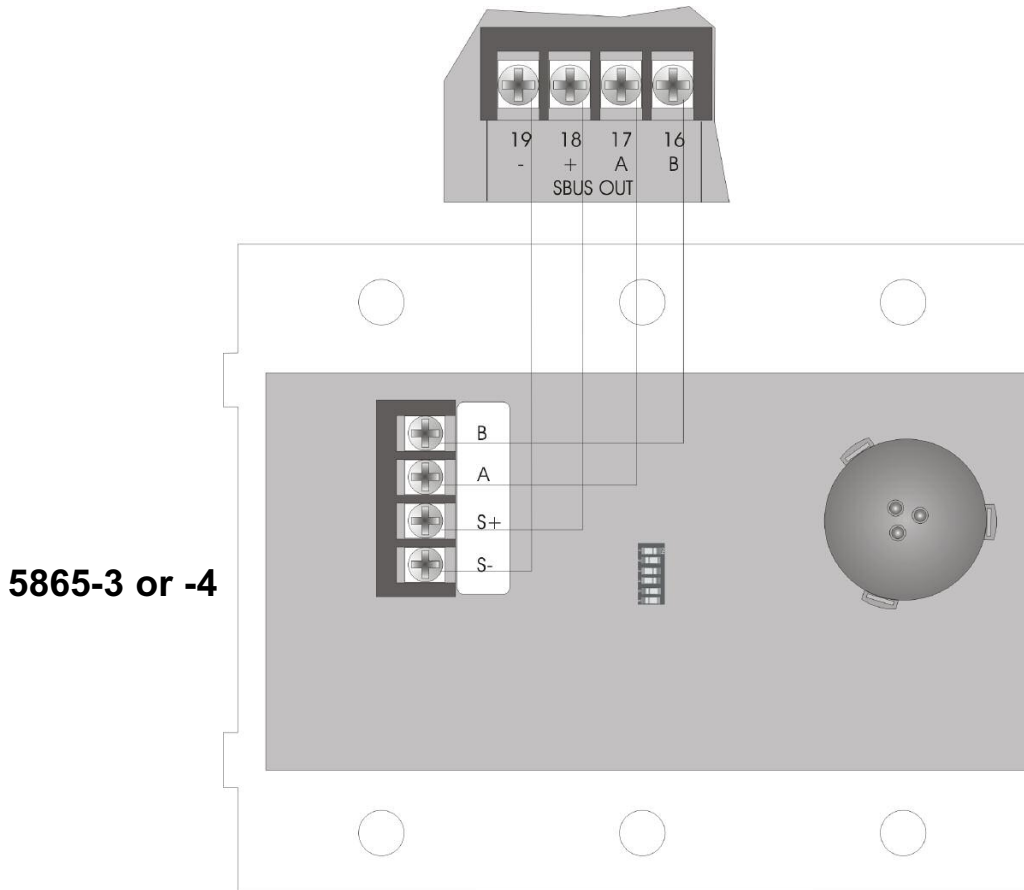


Wiring Diagram



SILENT KNIGHT

by Honeywell

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610. Phone: (800) 328-0103, Fax: (203) 484-7118. For Technical Support, Please call 800-446-6444. www.farenhyt.com



Assembled in the U.S.A.