




NOKIA-160W-BRKT-Pole/Wall Mount

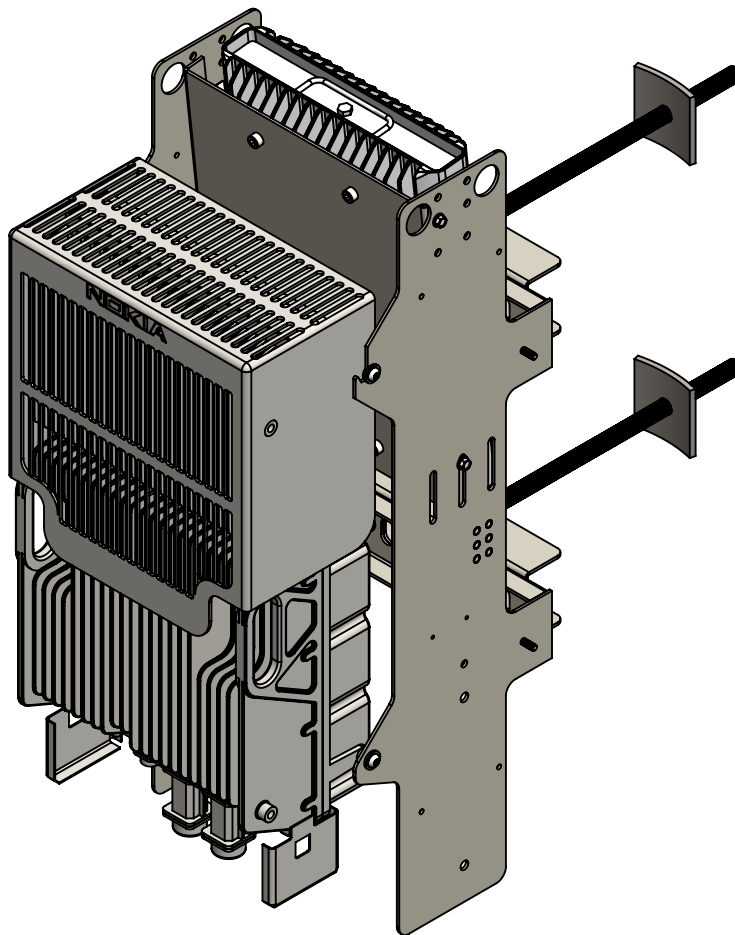


Wireless Construction, Inc.
40 Blake Road, Standish ME 04084
Phone: (207) 642-5751 | Fax: (207) 642-5754
www.wcitowers.com

Rev2.0 -110818



NOKIA-160W-BRKT Pole/Wall Mount

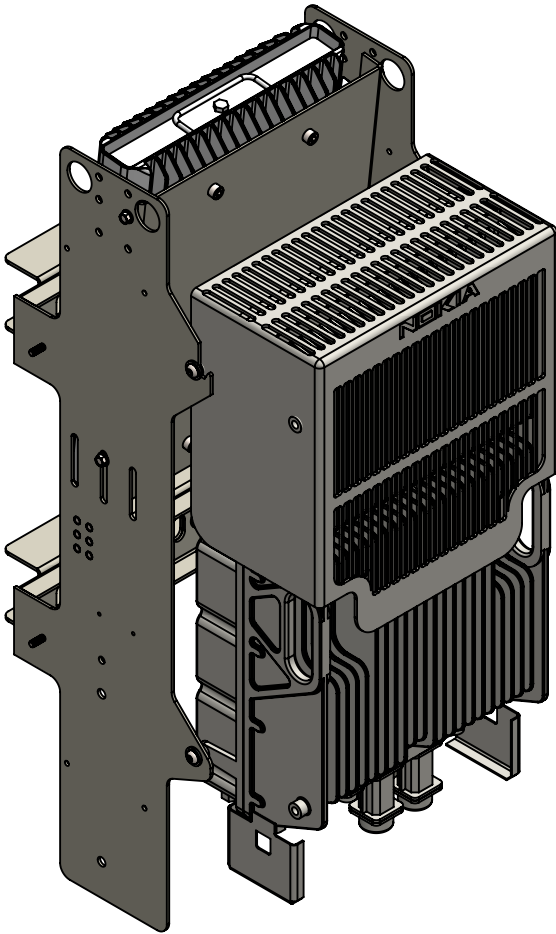

Product Features:

- For use with Nokia 160 Watt Dual Airscale and Delta 1.8kw Power Supply
- Compact Size
- Diverse mounting applications; includes concrete lamp post, steel pole, wood pole applications, and wall mountable.
- Optional grounding locations
- Power supply mounting options with ability to adjust bracket for slight tilt
- Concealment Cover attachment (*cover not included in this kit**)
- Kit Includes: (2) Pole Brackets, (1) Power Supply Bracket, (1) Router Bracket, (2) 5/8 x 16" Bolts, (4) 8½" Make a Clamp, Grounding Jumper, and all associated hardware.
- Kit Allows for: Fiber MultiPort, 90Watt Radiohead, Router, and Power Supply


Product Specifications:

Model No: NOKIA-160W-BRKT

Dimension (W x H x D)	33 x 13 x 12 (inches)
Weight	16 lbs
Safety	500 lbs Vertical Load Rating
Environment	Galvanized, Weather Resistant
Cooling	Natural Cooling
Mount	Lamp post, pole or wall mountable
Construction	Aluminum/ Steel
Finish	Outdoor Powder Coating/ Natural Color



NOKIA-160W-BRKT-Pole/Wall Mount

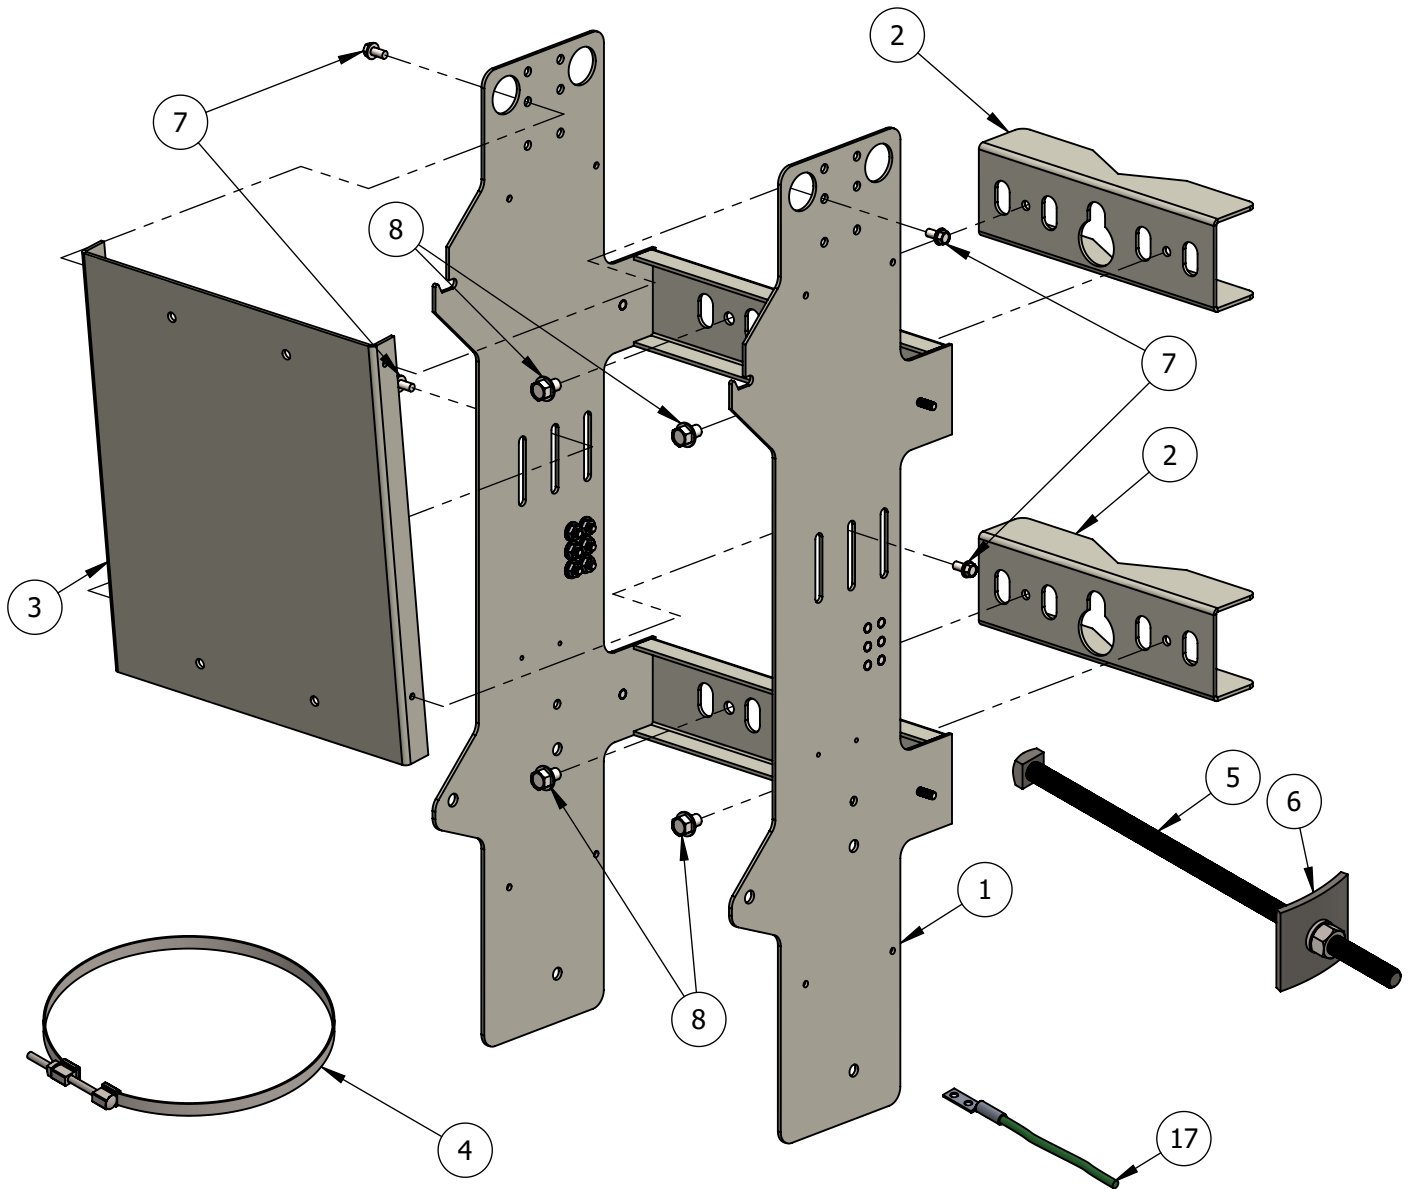

Item	Part Number	Description	Qty
1	V-426	Main Bracket	1
2	V-125	Pole Bracket	2
3	V-427	Power Supply Bracket	1
4	V-Band	BAB-3848	2
5	8228	5/8 x 16" Square Headed Bolt	2
6	233	3"x3"x1/4" Curved Washer	2
7	V-1420-500	Flange Head Cap Screw 1/4"-20 1/2"lg	4
8	V-3816-500	Flange Head Cap Screw 3/8"-16 1/2"lg	4
9	V-1420-FLN	Flange locknut 1/4"-20 (ground bus)	12
10	V-G-12	12" Ground Jumper	1
Not Included:			
11	Delta 1.8kW	Delta DC Power Supply	1
12	B25/66a 160W	AirScale Dual RRH 4T4R B25/66a 160 W AHFIA	1



NOKIA-160W-BRKT-Pole/Wall Mount

