


## Q45VR3LPQ Photo Sensor Wiring

This eye can be used with 24-240V AC or 12-240V DC.

Terminal numbers are for most versions of Versa-Pak.  
Consult actual version manual for proper wiring.

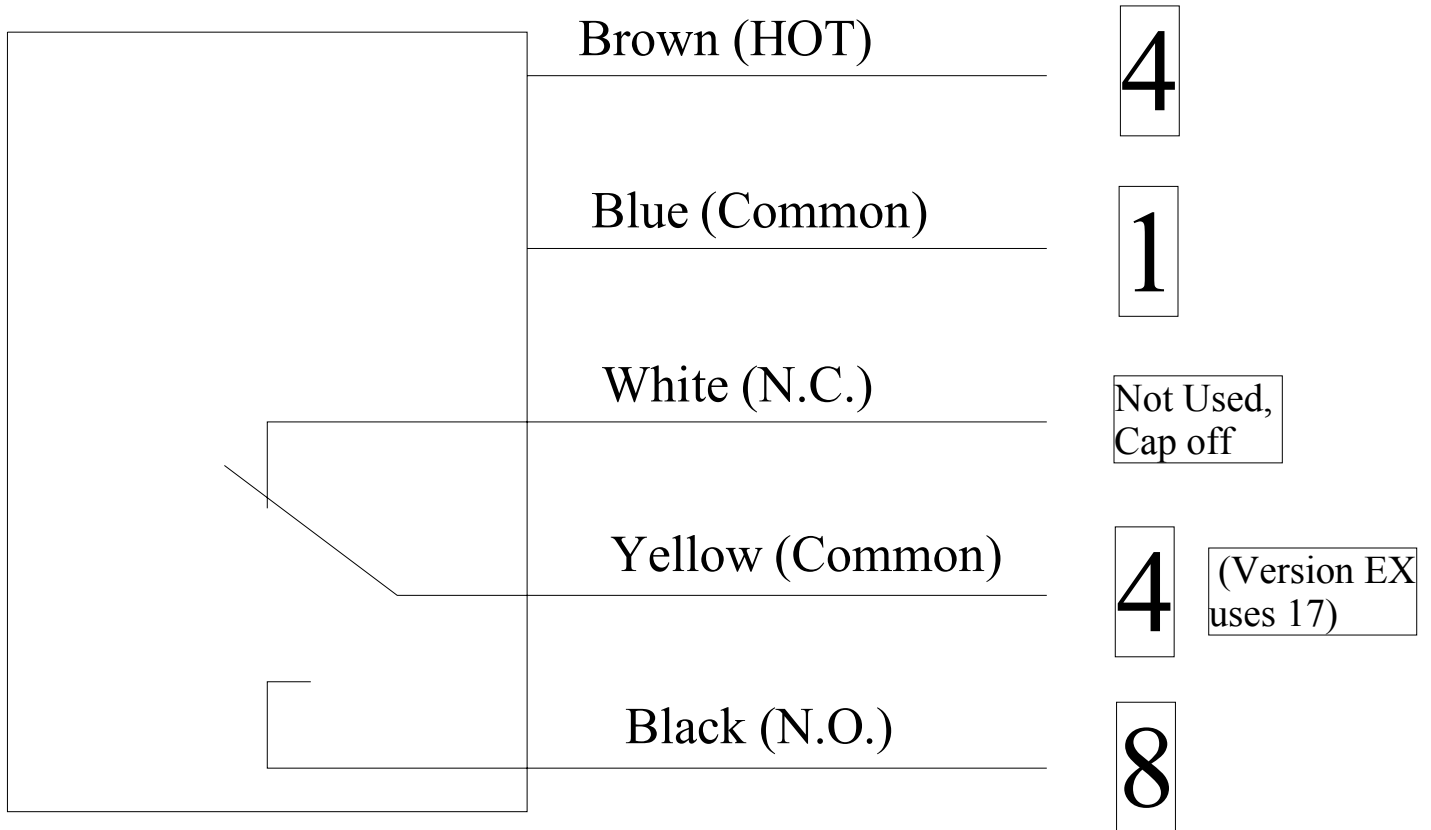

Note: Unlike our other eyes, this photo eye uses a reflector.  
The range is 6" to 20'. Also, this eye should be set on "D/O".  
To change from L/O to D/O, open the cover and flip the switch.

There are three lights on top of eye. The green light should be on any time the compactor is ready to start (E-Stop pulled, key switch on). Red and yellow should come on at the same time when the eye sees something. If this does not happen, there is a switch under the cover to the left of the green light. Make sure it is on D/O.

Timer for time delay output (not included): NOT used with later versions of Versa-Pak.  
Timer settings if used (off-off-off-on-on-off-off-off)  
Adjust with delay screw- defaults to several seconds.