

Project: _____

Type: _____


Quantity: _____

The SCL2 Series solar LED luminaire is a great fit for commercial, parking lot, recreational bikeway/pathway and public space lighting applications. The self-contained, unobtrusive design integrates its solar power, adaptive control and LED technologies into a compact and efficient form. With robust construction, and unequalled performance the SCL2 series is an excellent fit wherever cost effective, full cutoff lighting is required.

Utilizing solar power and LEDs, the SCL2 series is completely self-contained and offers significant benefits:

- Cost effective design ships fully assembled and installs in minutes
- Smart Connect provides wireless control & communication with your light
- Low installation cost and minimal site impact with no trenching, cabling or wiring
- Minimal ongoing costs with no electrical bills or bulbs to change
- Operates entirely independent from the grid and is immune to power outages
- A sustainable choice without recurring carbon emissions

All of our solar powered lights are enabled by our innovative Solar Lighting Controller (SLC). The SLC in each light is “self-learning” and allows the lights to predictively adapt to their surroundings, providing a level of lighting performance and reliability unavailable in other solar lighting products.

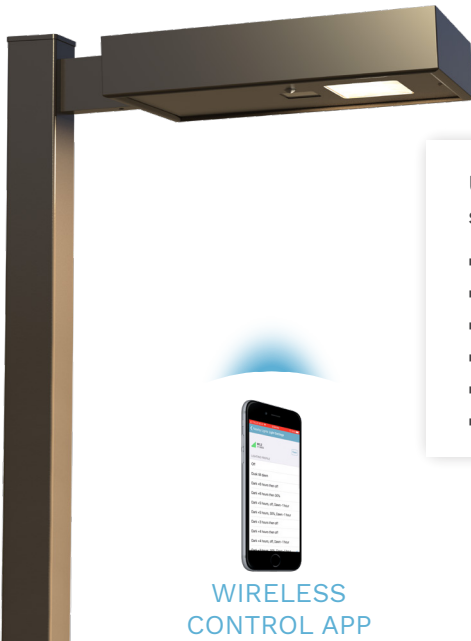

TECHNICAL SPECIFICATIONS

- Solar Module:**
- High-efficiency mono-crystalline cells
 - Inconspicuously integrated into the top of luminaire
 - Used for day/night detection (no photocell required)

- Solar Lighting Controller (SLC):**
- High-efficiency, temperature compensated Maximum Power Point Tracking (MPPT)
 - Micro-controller based technology
 - Includes high-efficiency LED driver
 - Multiyear data logging
 - Integrated into luminaire housing
 - Designed to automatically and adaptively manage lighting performance based on environmental conditions and lighting requirements
 - Patent Pending

- Battery:**
- High performance Lithium (LiFePO₄)
 - Exceptional 8 – 10 year life cycle
 - High temperature tolerance
 - Contained within luminaire housing
 - Designed for easy battery changes when required

- LEDs and Optics:**
- 100,000 hour L70 lifetime
 - Warm (3000K) and neutral (4500K) white color temperatures available
 - High efficiency Type 2, 3, 4 and 5, full cut-off optics
 - Typical lumen output from 2250 to 2830 lumens



- Mechanical Construction:**
- Extruded and formed, low copper aluminum enclosure, and mounting arm
 - Stainless fasteners with security fastener option
 - Architectural grade, super durable, TGIC powder coat
 - Four standard colors with custom colors available

- Factory Set Lighting Profiles:**
- 11 Standard Profiles Available
 - Dusk +3 hours, Dim 30%, Dawn -1 hour- Default
 - Visit our website for more details
 - Field Configurable with app

- Wireless Controls:**
- Bluetooth Low Energy interface with iOS app
 - Provide configuration and control of lighting profiles
 - Adjustment over dusk and dawn thresholds
 - Motion sensing capabilities to optimise performance based on usage





EPA: 0.99ft² (0.09m²)

Weight: 34 lbs (15.4kg) including battery

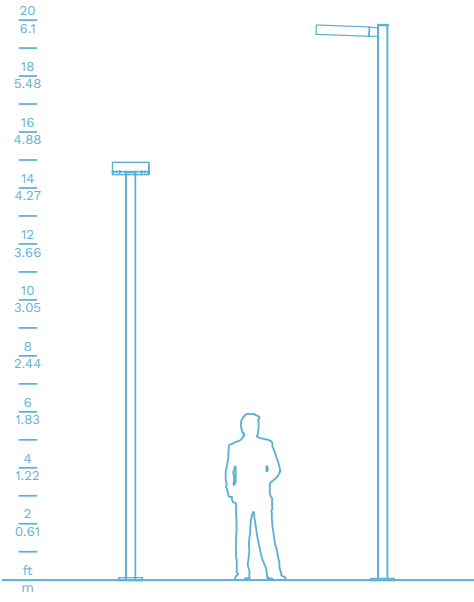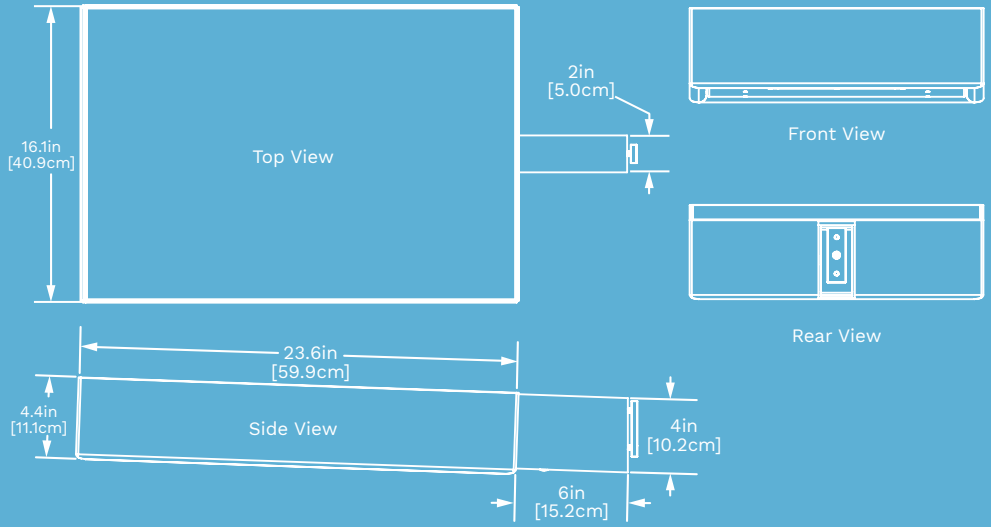

PHOTOMETRICS (IES files available on request)

If you have any questions, please don't hesitate to call us toll free at 1-844-279-8754 (USA & Canada).

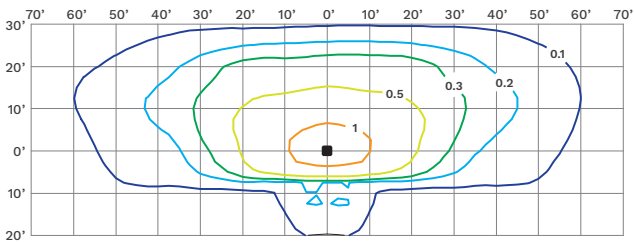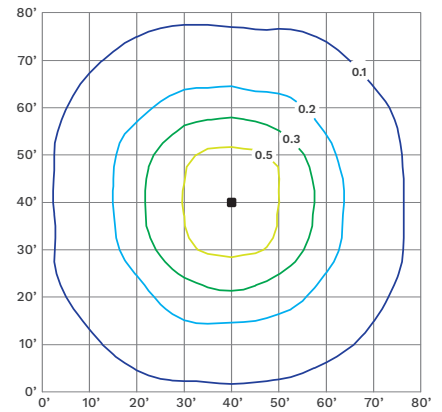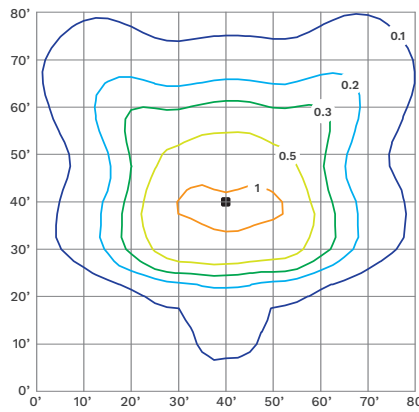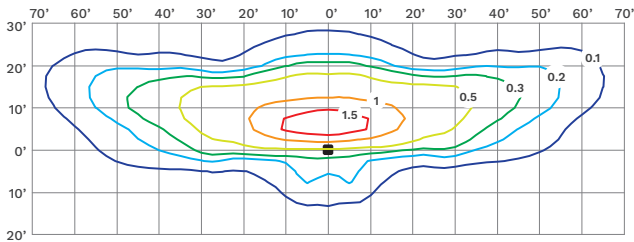

ORDER MATRIX



Series	Mounting	Finish	Distribution	LED Color	Lighting Profiles (Common)	Options
SCL2	SPMS - Side Pole Mount Square	BK - Black	T2 - Type 2	WW - 3000K	00 - Dusk till dawn	SEC - Security Fasteners
	SPMR - Side Pole Mount Round	BZ - Bronze	T3 - Type 3	NW - 4500K	01 - Dark +6 hours then off	MSO - Motion Sense Off
		SV - Silver	T4 - Type 4		02 - Dark + 6 hours, Dim 30%	
		WH - White	T5 - Type 5		03 - Dark + 5 hours, OFF, Dawn - 1 hour	
		CC - Custom			04 - Dark + 5 hours, Dim 30%, Dawn - 1 hour	
				09 - Dark + 3 hours, 30%, Dawn -1 hour (DEFAULT)		

- Notes:
- Photometrics based on 20 ft mounting height
 - All light levels in foot candles (fc) with 4500K color temperature and 2000 lumen output
 - To convert to lux multiply light level by 10.7
 - Contact FLT for additional profiles
 - Motion sensing is ON by default
 - Specifications subject to change without notice



EPA: 0.99ft² (0.09m²)

Weight: 34 lbs (15.4kg) including battery

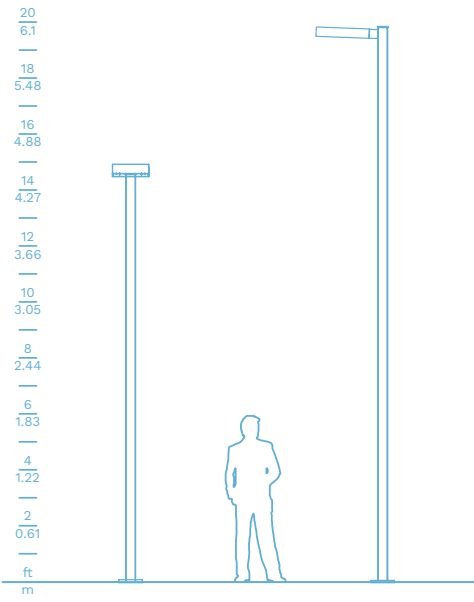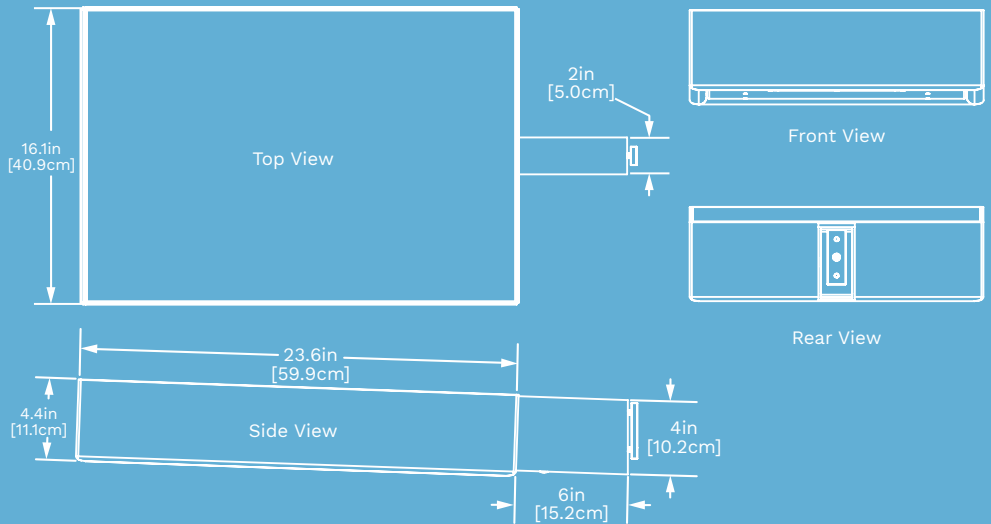

Team Solarcology®
808.833.6020
www.solarbollards.com
info@solarbollards.com



Field Configurable Lighting Profiles



Lighting Profile Number	Lighting Profile	Description
00	Dusk till dawn	On at dusk, off at dawn
01	Dark +6 hours then off	On at dusk, off after 6 hours
02	Dark +6 hours then 30%	On at dusk, dim to 30% after 6 hours till dawn
03	Dark +6 hours then 30%	On at dusk, off after 5 hours, on 1 hour before dawn
04	Dark +5 hours, 30%, Dawn -1 hour	On at dusk, dim to 30% after 5 hours, on 1 hour before dawn
05	Dark +3 hours then off	On at dusk, off after 3 hours
06	Dark +4 hours then off	On at dusk, off after 4 hours
07	Dark +4 hours, off, Dawn -1 hour	On at dusk, off after 4 hours, on 1 hour before dawn
08	Off	Off
09	Dark + 3 hours, 30%, Dawn -1 hour (default)	On at dusk, dim to 30% after 3 hours, on 1 hour before dawn (default)
10	Dusk till dawn, 30%	30% at dusk, off at dawn
Motion Sensing 'ON' Enabled	Default all profiles	Off to On or Dim to On when motion is sensed
MSO	Motion Sensing Off	No motion sensing activations

