

## Deflector rotativo de acero inoxidable con base cuadrada.



Acero inoxidable AISI 304 .

Rodamientos en acero galvanizado.

Stainless Steel Bearings in galvanized steel




Código Item	Medida Size (mm)	Acabado Finish
DF1717	17x 17 Ø 130	Inox AISI304
DF2222	22x 22 Ø 160	Inox AISI304
DF2727	27x 27 Ø 180	Inox AISI304
DF2732	27x 32 Ø 180	Inox AISI304
DF3232	32x 32 Ø 200	Inox AISI304
DF3252	32x 52 Ø 200	Inox AISI304
DF3737	37x 37 Ø 250	Inox AISI304
DF3762	37x 62 Ø 250	Inox AISI304
DF4242	42x 42 Ø 300	Inox AISI304
DF4252	42x 52 Ø 300	Inox AISI304
DF4747	47x 47 Ø 300	Inox AISI304
DF5252	52x 52 Ø 300	Inox AISI304
DF6262	62x 62 Ø 320	Inox AISI304
DF6272	62x 72 Ø 320	Inox AISI304
DF7272	72x 72 Ø 350	Inox AISI304

## VENTILACIÓN

Velocidad máxima admisible de viento = 60 km/h

Maximum admissible wind speed = 60 km / h

## Deflector rotativo totalmente de acero inoxidable con base cuadrada.

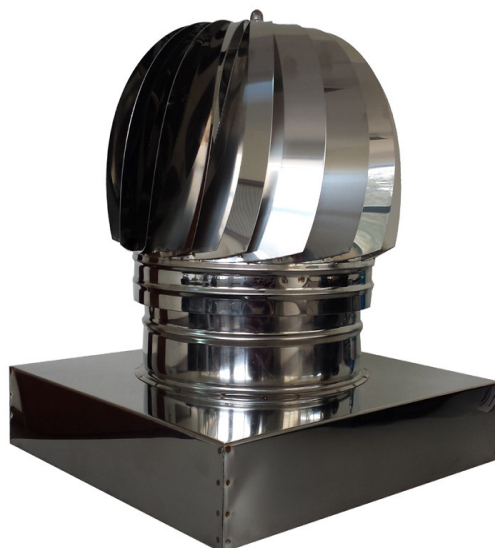

Acero inoxidable AISI 304 .

Rodamientos en acero inoxidable.

Stainless Steel Bearings in stainless steel



Código Item	Medida Size (mm)	Acabado Finish
DR1717	17x 17 Ø 130	Inox AISI304
DR2222	22x 22 Ø 160	Inox AISI304
DR2727	27x 27 Ø 180	Inox AISI304
DR2732	27x 32 Ø 180	Inox AISI304
DR3232	32x 32 Ø 200	Inox AISI304
DR3252	32x 52 Ø 200	Inox AISI304
DR3737	37x 37 Ø 250	Inox AISI304
DR3762	37x 62 Ø 250	Inox AISI304
DR4242	42x 42 Ø 300	Inox AISI304
DR4252	42x 52 Ø 300	Inox AISI304
DR4747	47x 47 Ø 300	Inox AISI304
DR5252	52x 52 Ø 300	Inox AISI304
DR6262	62x 62 Ø 320	Inox AISI304
DR6272	62x 72 Ø 320	Inox AISI304
DR7272	72x 72 Ø 350	Inox AISI304

### GARANTÍA FESIT

