

**TOWN OF CLIFTON  
FLAP GATE REPLACEMENT PROJECT**

**March 20, 2019**

**Addendum No. 1**

This addendum pertains to the entire set of bid documents and to the entire plan set and shall take precedence over any conflicting information contained therein.

I. Clarifications

**Clarification 1:**

The project budget is set at \$95,000, the contract will be awarded to the contractor who can install the highest number of gates within the contract budget.

**Clarification 2:**

Flap gates shall be manufactured by Neehnah Foundry or Waterman and shall be capable of withstanding a water depth of 20 feet. Alternative manufacturers approved by the engineer are acceptable. It is suggested the contractor submit the alternate manufacturer prior to bidding, although this is not required.

**Clarification 3:**

The deadline for questions is noon on March 27, 2019. Questions received after the deadline will not be answered. All questions shall be emailed, verbal questions will not be answered.

II. Response to Pre-Bid Meeting Questions

**Question 1:**

What is the contractor required to do with the old gates?

**Response 1:**

The contractor shall dispose of the old gates in a lawful manner. The cost of disposal shall be included in the bid price for each gate.

**Question 2:**

How do we attach Gate 22 to the wall, as it is grouted slag block?

**Response 2:**

Gate 22 shall be removed from the project; the contractor shall not bid on Gate 22.

**Question 3:**

Should Gate 16 be attached to the floodwall or the protruding pipe?

**Response 3:**


The existing protruding pipe on Gate 16 shall be cut to permit the proposed flap gate to be attached to the floodwall in accordance with Detail A on Sheet 4 of the construction plans.

**Question 4:**

Can the railroad ties above Gate 20 be relocated for gate replacement?

**Response 4:**

For bidding purposes, the contractor shall assume the railroad ties above Gate 20 cannot be relocated.

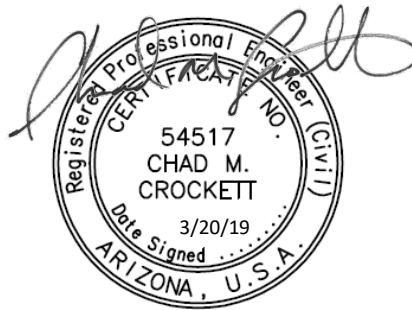

Expires 6/30/19