




### Tornillo DIN 933 Calidad 8.8 Zincado.

L (mm)	M-4 Ø	M-5 Ø	M-6 Ø	M-8 Ø	M-10 Ø	M-12 Ø	M-14 Ø	M-16 Ø	M-20 Ø	M-22 Ø	M-24 Ø	M-27 Ø	M-30 Ø	M-33 Ø	M-36 Ø
8	X														
10	X	X	X	X											
12	X	X	X	X											
16	X	X	X	X	X										
20	X	X	X	X	X	X									
25	X	X	X	X	X	X	X								
30	X	X	X	X	X	X	X	X							
35		X	X	X	X	X	X	X	X						
40		X	X	X	X	X	X	X	X	X	X				
45		X	X	X	X	X	X	X	X	X	X	X			
50		X	X	X	X	X	X	X	X	X	X	X	X		
55			X	X	X	X	X	X	X	X	X	X	X		
60			X	X	X	X	X	X	X	X	X	X	X	X	
65			X	X	X	X	X	X	X	X	X	X	X	X	
70			X	X	X	X	X	X	X	X	X	X	X	X	
75		X	X	X	X	X	X	X	X	X	X	X	X	X	X
80		X	X	X	X	X	X	X	X	X	X	X	X	X	X
90			X	X	X	X	X	X	X	X	X	X	X	X	X
100			X	X	X	X	X	X	X	X	X	X	X	X	X
110					X	X	X	X	X	X	X	X	X	X	X
120					X	X	X	X	X	X	X	X	X	X	X
130					X	X	X	X	X	X	X	X	X	X	X
140					X	X	X	X	X	X	X	X	X	X	X
150					X	X	X	X	X	X	X	X	X	X	X

d (mm)	k (mm)	s (mm)	p (mm)
M-4	2,8	7	0,7
M-5	3,5	8	0,8
M-6	4	10	1
M-8	5,3	13	1,25
M-10	6,4	17	1,5
M-12	7,5	19	1,75
M-14	8,9	22	2
M-16	10	24	2
M-18	11,5	27	2,5
M-20	12,5	30	2,5
M-22	14	32	2,5
M-24	15	36	3
M-27	17	41	3
M-30	18,7	46	3,5
M-33	21	50	3,5
M-36	22,5	55	4

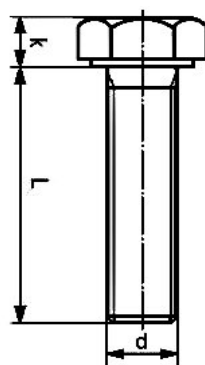

**p:** Paso de rosca  
**k:** Altura de cabeza  
**s:** Ancho de llave  
**d:** Métrica  
**L:** Longitud

#### DATOS TÉCNICOS

## DIN 933 8.8

Tornillo de cabeza hexagonal

Rosca total

Zincado


Clase: 8.8



**DACROMET®**

www.fesit.es

#### GARANTÍA FESIT



Pernos de cabeza hexagonal con rosca total.

Norma DIN933/ DIN558

ISO4017 ISO 4018 EN 24018

