

## TERRA FLOAT


**TERRA FLOAT** (3-piece-roller, floating)

### ■ Spiking

Breaks up surface incrustations, thus promoting air exchange and making the turf breathe. Choose between Star Roller or Spiked Roller.

### ■ Overseeding

For changing the composition of grass or for improving the condition of turf that is worn and infiltrated with weeds or foreign grass. A high hole count per sq.ft. is the most important prerequisite for a high and constant germinating result. Choose between Star Roller or Spiked Roller.

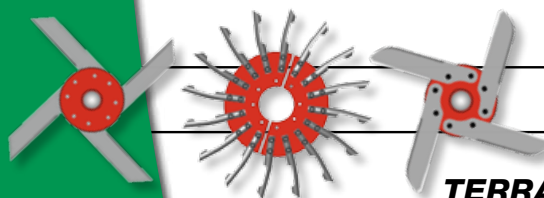

## TERRA SLIT

**TERRA SLIT** (rigid rotor)

### ■ Deep spiking / Deep aerating


Breaks up compaction and restores the water permeability up to a depth of 8". Prevents saturation.

### ■ Aerating

Loosens the soil up to a depth of appr. 3", thus promoting air exchange.




### ■ Slitting

Aerates the soil up to a depth of appr. 8", thus promoting air exchange and cutting unwanted side shoots.

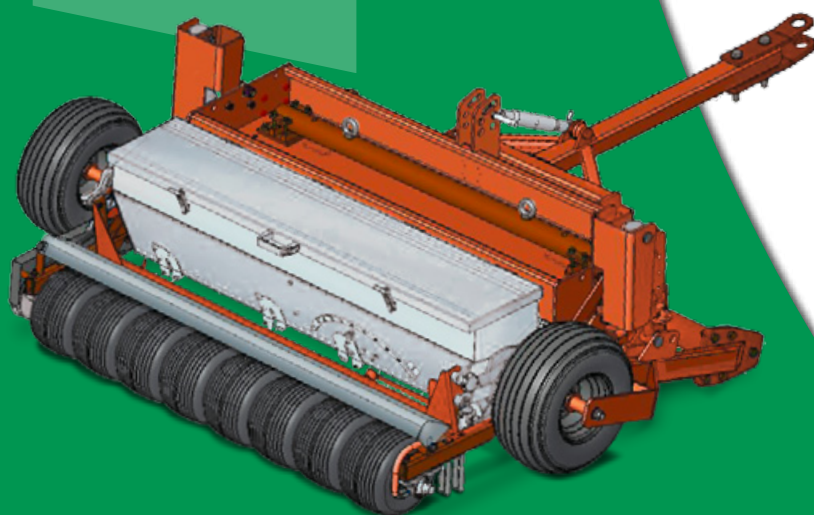

# TERRA FLOAT

> 3-piece-roller, floating <

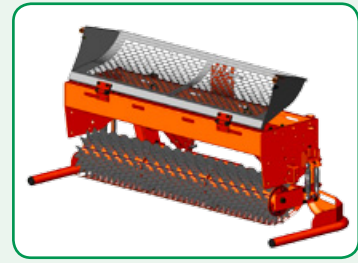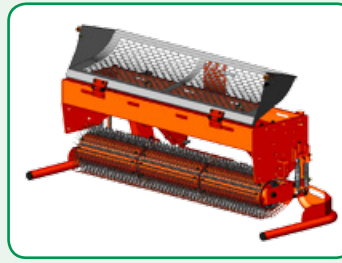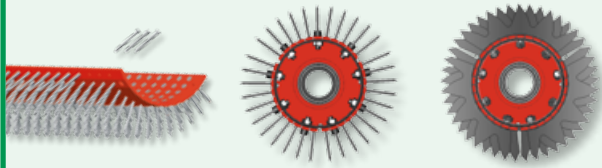



## TECHNICAL DATA

## TERRA FLOAT

Working width:	63"
Weight appr.:	660 lbs.
Mounting:	rear - 3-point cat. I + II
Minimum tractor lifting capacity:	2650 lbs.
Drive:	ground-driven
Max. working depth Spiked roller and Star Roller:	1¼"
Lateral spacing Spiked Roller and Star Roller:	1¼"
Available tine diameter for Spiked Rotor:	3/16 and 5/16
Overseeder:	optional
Weight overseeder appr.:	330 lbs.
Hydraulic weight transfer:	optional
Turf retainer:	optional
Addtl. weight appr. 155 lbs.:	optional
Bogey:	optional

# TERRA SLIT

> rigid rotor <

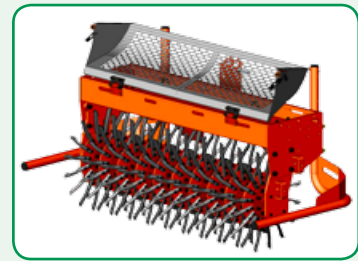

## TECHNICAL DATA

## TERRA SLIT

Working width:	63"
Weight appr.:	575 lbs.
Mounting:	rear - 3-point cat. I + II
Minimum tractor lifting capacity:	2650 lbs.
Drive:	ground-driven
<b>Available tools</b>	
Low heave knives, max. working depth appr. 8":	optional
High heave knives, max. working depth appr. 8":	optional
Slitting knives, max. working depth appr. 8":	optional
Green slitting knives, max. working depth appr. 6":	optional
Coring tines, max. working depth appr. 3":	3"
Lateral spacing of all tools minimum:	3"
Addtl. weight appr. 155 lbs.:	optional
Hydraulic weight transfer:	optional
Bogey:	optional

Descriptions and illustrations are non-binding. We reserve the right to modify the construction and design.

