


## Closed End Rivets

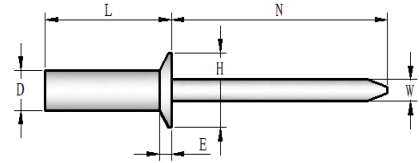

### Steel / Steel

Carbon Steel Zinc Plated Body / Carbon Steel Zinc Plated Mandrel

Countersunk Head (120°)											
Nominal Body Diameter (D)	Part Number	Body Diameter (D)	Grip Range (Min) (Max)	Hole Size & Drill No.	Body Length MAX (L)	Minimum Mandrel Protrusion (N)	Mandrel Diameter (W)	Flange (head) Diameter (H)	Flange (head) Thickness (Ref)(E)	Typical Shear min Lbs.	Typical Tensile min Lbs.
1/8	SKSH-04-01	0.125	0.031 - 0.062	.129-.133 #30	0.332	1.00	0.074	0.233± .012	0.042	315	405
	SKSH-04-02	0.125	0.063 - 0.125	.129-.133 #30	0.395	1.00	0.074	0.233± .012	0.042	315	405
	SKSH-04-03	0.125	0.126 - 0.187	.129-.133 #30	0.457	1.00	0.074	0.233± .012	0.042	315	405
	SKSH-04-04	0.125	0.188 - 0.250	.129-.133 #30	0.520	1.00	0.074	0.233± .012	0.042	315	405