

Houston International Specialty Inc.

Size	5.5
Grade	P110
Weight	26.80


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	6.300	4.500				
Pipe		4.500	8.250	4.125	0.500	4.375
Pin		4.500				


Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ¹	Yield Torque
Minimum	Optimum ²	Maximum		
21,900	23,250	25,500	29,565	34,600

Yield Stress (x1000 lbs.)	
Tensile	Compressive
864	864

Maximum Pressure (psi)	
Internal	External
16,810	15,850

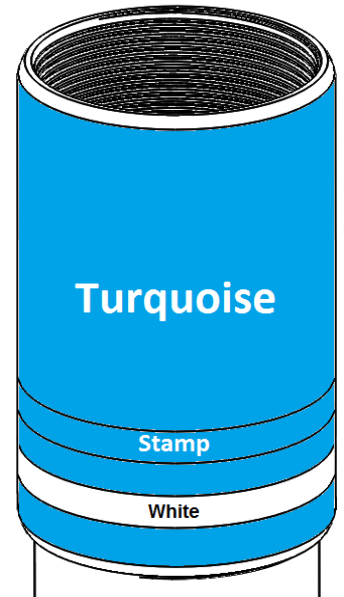

- ¹ Max. Working Torque value is not to be exceeded during operation.
² If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

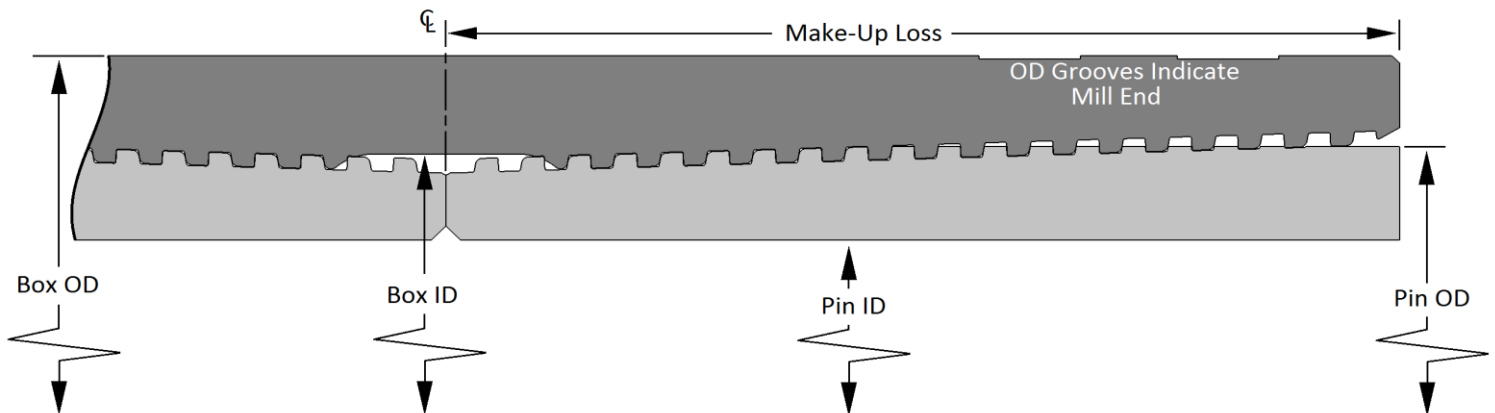

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev B

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557