

MEREDITH BROTHERS, INC.

614-258-4991

MEREDITHBROTHERSINC.COM

EZ-Catch™

Inlet Protection

CAPTURING SEDIMENT ON THE GO, ENABLING CLEAN WATER TO FLOW



- 2.5 TIMES MATERIAL FLOW RATES
- 15% GREATER FILTERING EFFICIENCY

Adjustable/Reusable Frames

EZ-Catch0: 11"x20" up to 18"x37"

EZ-Catch1: 18"x18" up to 32"x32"

EZ-Catch2: 18"x34" up to 32"x48"

EZ-Catch3: 34"x34" up to 48"x48"

Replaceable Filter Sacks
192 gl/sqft/min

FLO-WATER.NET

MEREDITH BROTHERS, INC.

614-258-4991
MEREDITHBROTHERSINC.COM

EZ-CatchManTM

 Inlet Protection 

CAPTURING SEDIMENT ON THE GO, ENABLING CLEAN WATER TO FLOW



- 2.5 TIMES MATERIAL FLOW RATES
- 15% GREATER FILTERING EFFICIENCY

Adjustable/Reusable Frames
EZ-CatchMan1: 15" up to 24" diameter
EZ-CatchMan2: 24" up to 37" diameters

Replaceable Filter Sacks
192 gl/sqft/min



MEREDITH BROTHERS, INC.


VISIT

FLO-WATER.NET

**HI-FLO™ SILT FENCE
CUSTOM-FLO™ SOLUTIONS**

Specification sheets available

EZ-Flo™

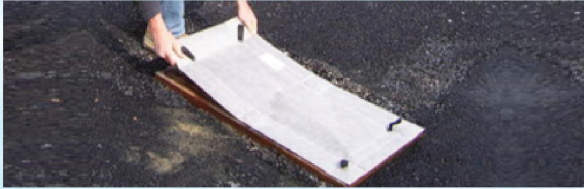


EZ-FloMan™



**EZ-Flo™/EZ-FloMan™
Above Grate Magnet
Inlet Protection
#1 at Silica containment**



EZ-ClipGuard™



Flo-Water Specifications

Properties	ASTM Test	Value
Mass per Unit Area (oz/yd ²)	D 3776	5.13
Grab Tensile Strength, MDXCD (lbs)	D 4832	297/223
Grab Elongation, MDXCD (%)	D 4832	58/59
Trapezoidal Tear, MDXCD (lbs)	D 4833	81/75
Puncture (lbs)	D 4833	99
Burst Strength (psi)	D 3786	340
Permeability (sec-1)	D 4491	2.60
A.O.S. (U.S. sieve - (mm))	D 4751	60
Water Flow Rate (gpm/ft ²)	D 4491	192

- PROPRIETARY MATERIAL ALLOWS 2.5 TIMES
TYPICAL INDUSTRY MATERIAL FLOW RATES
- 15% GREATER FILTERING EFFICIENCY

**614-258-4991
MEREDITHBROTHERSINC.COM**

Pump-It Tube™

Dewatering Bags

MEREDITH
BROTHERS, INC.



PATENT
PENDING

Pump-It Tube Sizing:	20"x05'	40"x05'	80"x10'
	20"x10'	40"x10'	80"x20'
	20"x20'	40"x20'	80"x30'
	*Custom sizing available		




- 192 gal/ft²/min enables faster flow rates
- 15% greater sediment capture
- Built-in scrim for added strength
- Reduction in footprint on site
- Eliminate downtime
- Easier installation & maintenance
- Let the water through, not the sediment!



MEREDITH BROTHERS, INC.



Hi-Flo Silt Fence

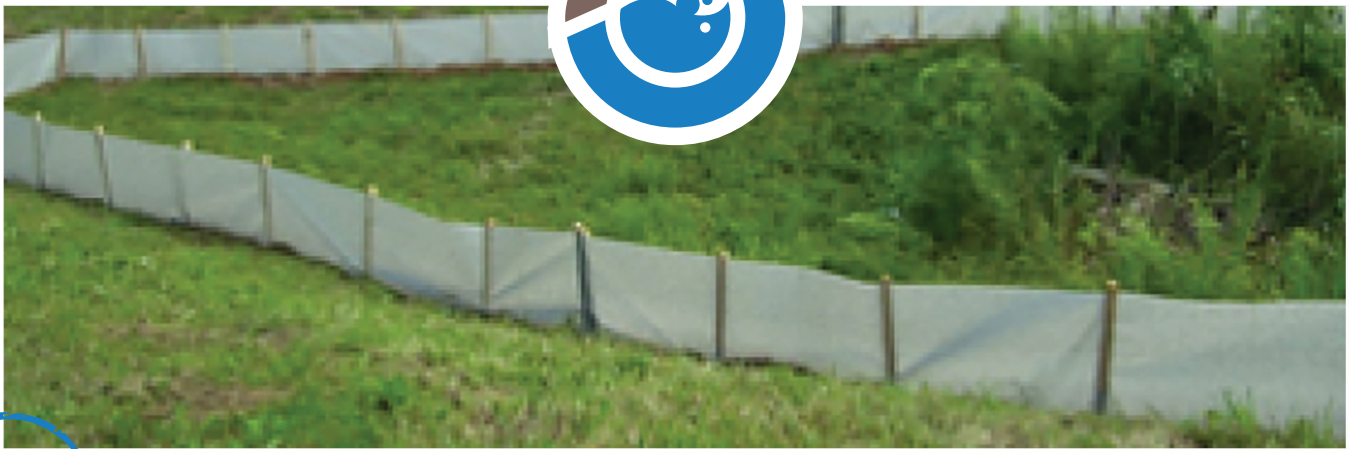

PATENT
PENDING

- Allows better flow while keeping silt on the site
- Hi-Flo 192 gal/ft²/min
- 91.6% sediment capture
- Built-in scrim for added strength
- 60' rolls with wood stakes (6' spacing)
(48" x 1-3/8" x 1-5/8") with 24" lathe
- 500' rolls without stakes (for metal T-posts)
- Let the water through, not the sediment!

EZ-Turbidity™ Curtains
(3', 6' & 9')