






LC-5211

5 T 11,020 lbs

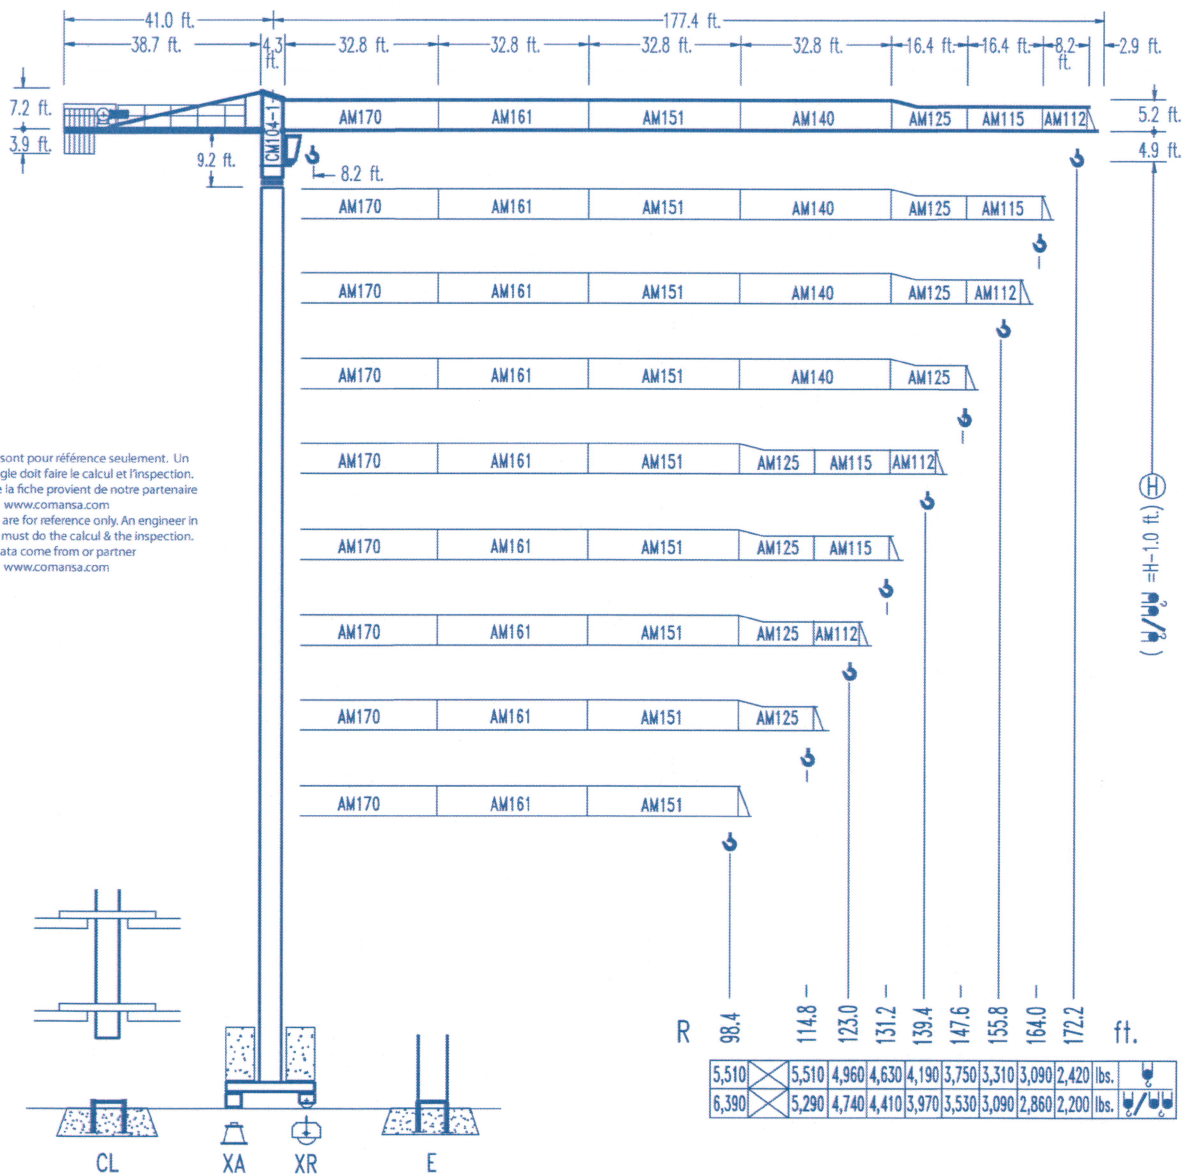



CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	65.6	82.0	98.4	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	ft.
172.2	87.9 ft.	5,510	5,510	5,510	4,830	4,010	3,700	3,420	3,170	2,950	2,750	2,580	2,420	
	46.6 ft.	11,020	7,450	5,730	4,580	3,790	3,480	3,200	2,950	2,730	2,530	2,360	2,200	
164.0	101.0 ft.	5,510	5,510	5,510	5,510	4,740	4,360	4,060	3,770	3,500	3,280	3,090		
	53.5 ft.	11,020	8,730	6,740	5,540	4,520	4,140	3,830	3,550	3,280	3,060	2,860		
155.8	101.4 ft.	5,510	5,510	5,510	5,510	4,760	4,390	4,080	3,790	3,530	3,310			
	53.5 ft.	11,020	8,770	6,790	5,470	4,540	4,170	3,860	3,570	3,310	3,090			
147.6	106.3 ft.	5,510	5,510	5,510	5,510	5,050	4,650	4,320	4,010	3,750				
	56.1 ft.	11,020	9,260	7,160	5,800	4,830	4,430	4,100	3,790	3,530				
139.4	110.2 ft.	5,510	5,510	5,510	5,510	5,240	4,850	4,500	4,190					
	58.4 ft.	11,020	9,650	7,470	6,040	5,020	4,630	4,280	3,970					
131.2	112.8 ft.	5,510	5,510	5,510	5,510	5,400	4,980	4,630						
	59.7 ft.	11,020	9,920	7,690	6,210	5,180	4,760	4,410						
123.0	112.2 ft.	5,510	5,510	5,510	5,510	5,380	4,960							
	59.4 ft.	11,020	9,850	7,650	6,170	5,160	4,740							
114.8	114.8 ft.	5,510	5,510	5,510	5,510	5,510								
	60.7 ft.	11,020	10,090	7,850	6,350	5,290								
98.4	98.4 ft.	5,510	5,510	5,510	5,510									
	61.0 ft.	11,020	10,160	7,890	6,390									

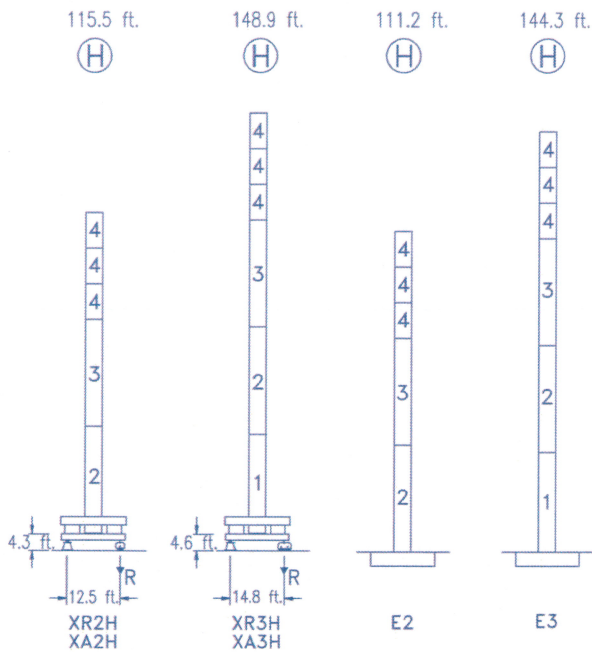

N	Ref.	h
1	MT123	33.1 ft.
2	MH124A	38.7 ft.
3	MH124-1	38.7 ft.
4	MH121	9.8 ft.
9	CL20	7.2 ft.
MH124=(4)MH121-0.6 ft.		

	H=H+0.6 ft.
	H=H
	H=H
	H=H-0.6 ft.

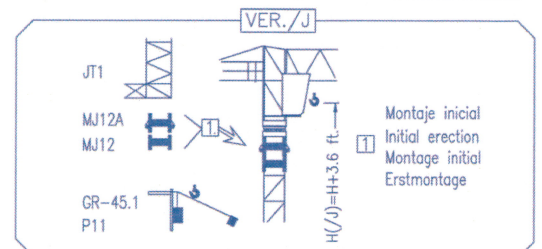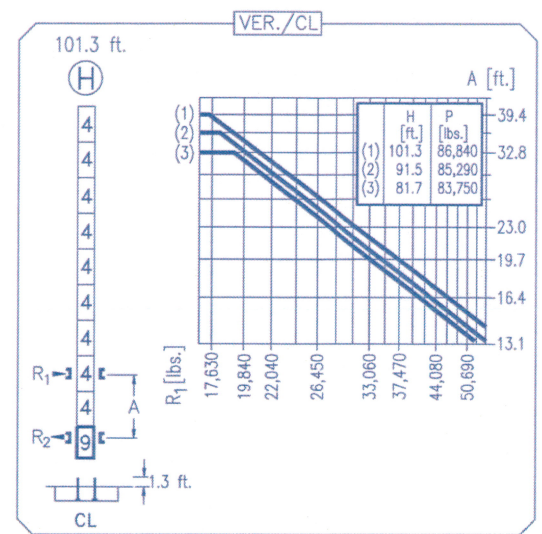

R. máx.	En servicio In operation En service In Betrieb	XR2H 96,650 lbs. XR3H 144,620 lbs.
---------	---	--

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR2H 89,730 lbs. XR3H 101,630 lbs.
---------	---	--


CS2-1.9
3 hp.
66 ft./min 189 ft./min

CFU-2.2
3 hp.
0 ⇄ 262 ft./min

GR-9.0
66 ft.lbs.
0 ⇄ 0.8 rpm


	
TS2-4.5	TS2-5.5
2x33 ft.lbs.	2x40 ft.lbs.
0 ⇄ 78 ft./min	
XR2H	XR3H

	ES3-18-12
29 hp.	
	I
ft./min	32
lbs.	5,510
	II
ft./min	16
lbs.	11,020
	III
ft./min	126
lbs.	5,510
	IV
ft./min	252
lbs.	2,860

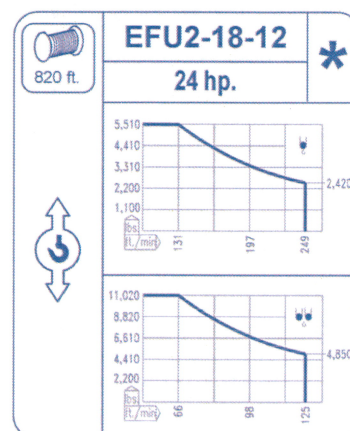


Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---------------------------------

Opcional Optional En option Kaufoption	*
---	----------

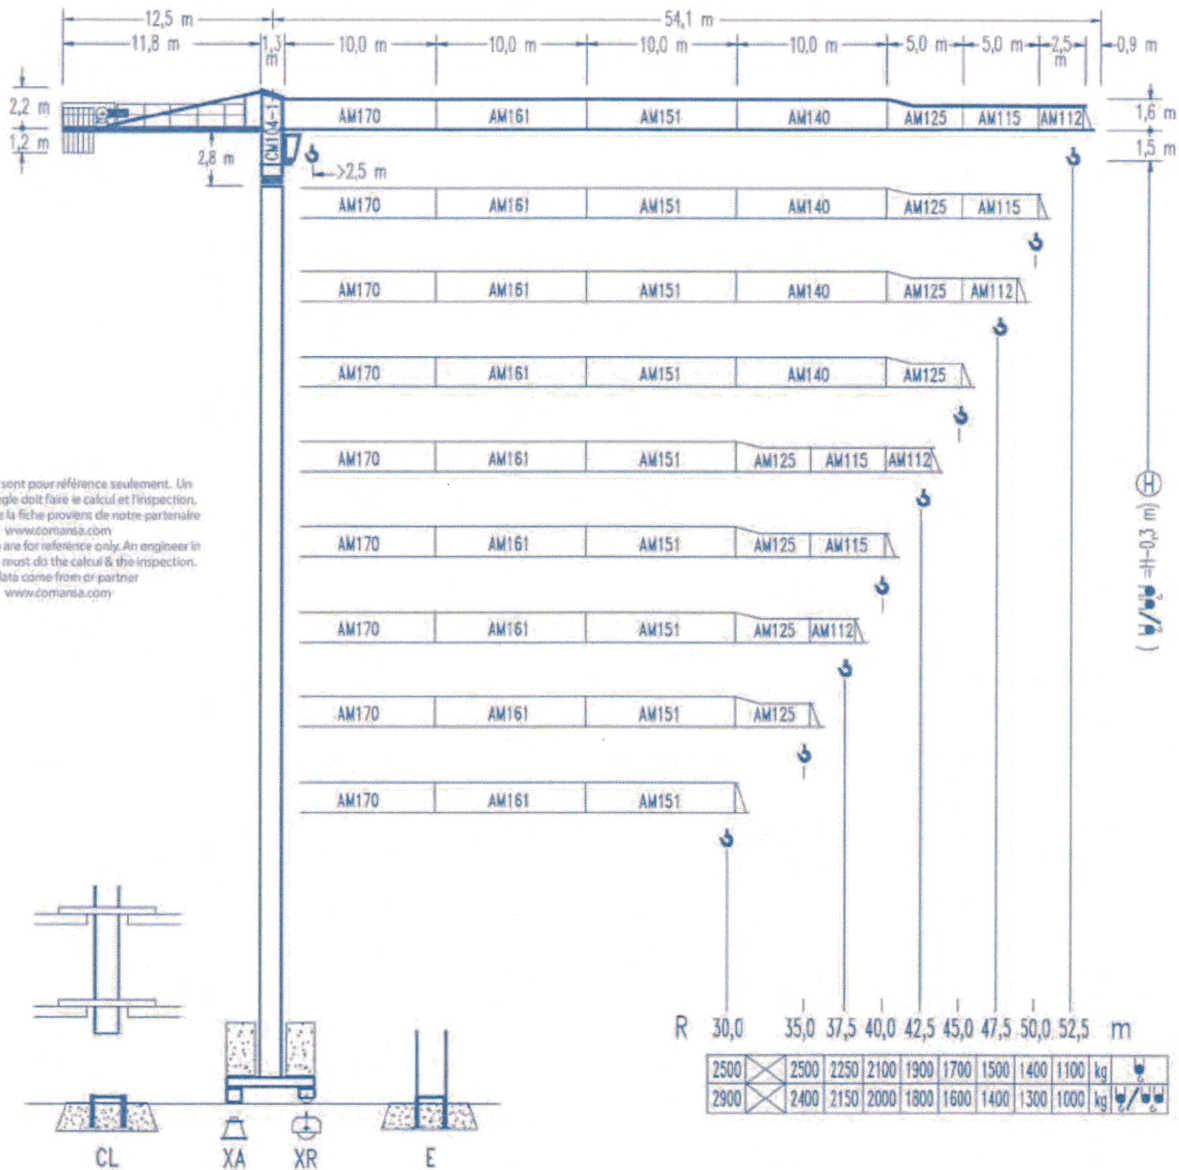**LC-5211****5 T**
11,020 lbsCE
DIN 15018 H1 B3



R	R(Cmax)	Cmax	20,0	25,0	30,0	35,0	37,5	40,0	42,5	45,0	47,5	50,0	52,5	m	kg
52,5	26,8 m	2500	2500	2500	2190	1820	1680	1550	1440	1340	1250	1170	1100		
	14,2 m	5000	3380	2600	2080	1720	1580	1450	1340	1240	1150	1070	1000		
50,0	30,8 m	2500	2500	2500	2500	2150	1980	1840	1710	1590	1490	1400			
	16,3 m	5000	3960	3060	2470	2050	1880	1740	1610	1490	1390	1300			
47,5	30,9 m	2500	2500	2500	2500	2160	1990	1850	1720	1600	1500				
	16,3 m	5000	3980	3080	2480	2060	1890	1750	1620	1500	1400				
45,0	32,4 m	2500	2500	2500	2500	2290	2110	1960	1820	1700					
	17,1 m	5000	4200	3250	2630	2190	2010	1860	1720	1600					
42,5	33,6 m	2500	2500	2500	2500	2380	2200	2040	1900						
	17,8 m	5000	4380	3390	2740	2280	2100	1940	1800						
40,0	34,4 m	2500	2500	2500	2500	2450	2260	2100							
	18,2 m	5000	4500	3490	2820	2350	2160	2000							
37,5	34,2 m	2500	2500	2500	2500	2440	2250								
	18,1 m	5000	4470	3470	2800	2340	2150								
35,0	35,0 m	2500	2500	2500	2500										
	18,5 m	5000	4580	3560	2880	2400									
30,0	30,0 m	2500	2500	2500											
	18,6 m	5000	4610	3580											

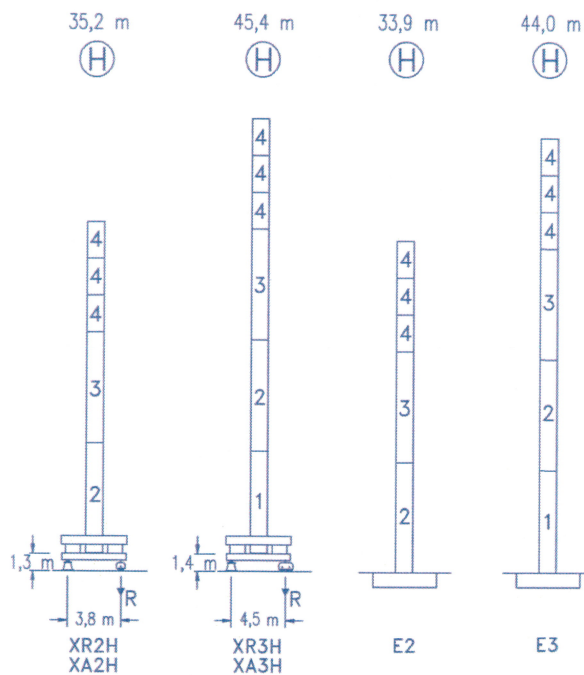

N	Ref.	h
1	MT123	10,1 m
2	MH124A	11,8 m
3	MH124-1	11,8 m
4	MH121	3,0 m
9	CL20	2,2 m

MH124=(4)MH121-0,2 m

	H=H+0,2 m
	H=H
	H=H
	H=H-0,2 m

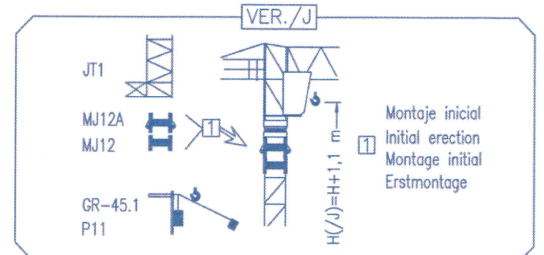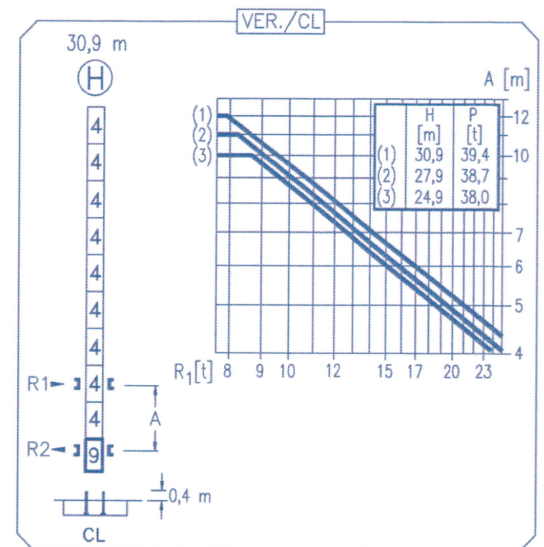

R. máx.	En servicio In operation En service In Betrieb	XR2H 46,0 t
		XR3H 49,0 t

R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	XR2H 50,9 t
		XR3H 72,4 t

CS2-1.9

1,9 kW

**16 m/min
48 m/min**

CFU-2.2

2,2 kW

0 ⇌ 80 m/min

GR-9.0

90 Nm

0 ⇌ 0,7 rpm

TS2-4.5	TS2-5.5
2x45 Nm	2x55 Nm
0 ⇌ 20 m/min	
XR2H	XR3H

ES3-18-12

18 kW

		I	II	III
	m/min	8	32	64
	kg	2500	2500	1300
	m/min	4	16	32
	kg	5000	5000	2600

EFU2-18-12

18 kW

1,1

2,2

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	---------------------------------

Optional Optional En option Kaufoption	*
---	----------