

Houston International Specialty Inc.

Size	7.625
Grade	P110
Weight	29.70


TCBC-HT

Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	8.5	7.480				
Pipe		6.875	9.375	4.688	0.375	6.750
Pin		6.875				

Torque Values (ft-lbs)				
Field End Make-Up			Max. Working Torque ¹	Yield Torque
Minimum	Optimum ²	Maximum		
15,000	18,500	22,500	36,000	43,400


Yield Stress (x1000 lbs.)	
Tensile	Compressive
940	940

Maximum Pressure (psi)	
Internal	External
12,930	12,590

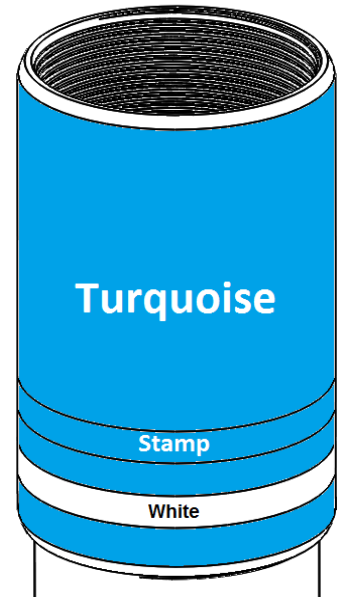

¹ Max. Working Torque value is not to be exceeded during operation.

² If Optimum Torque does not meet the Base of Triangle Stamp, M/U to the Base of Triangle.

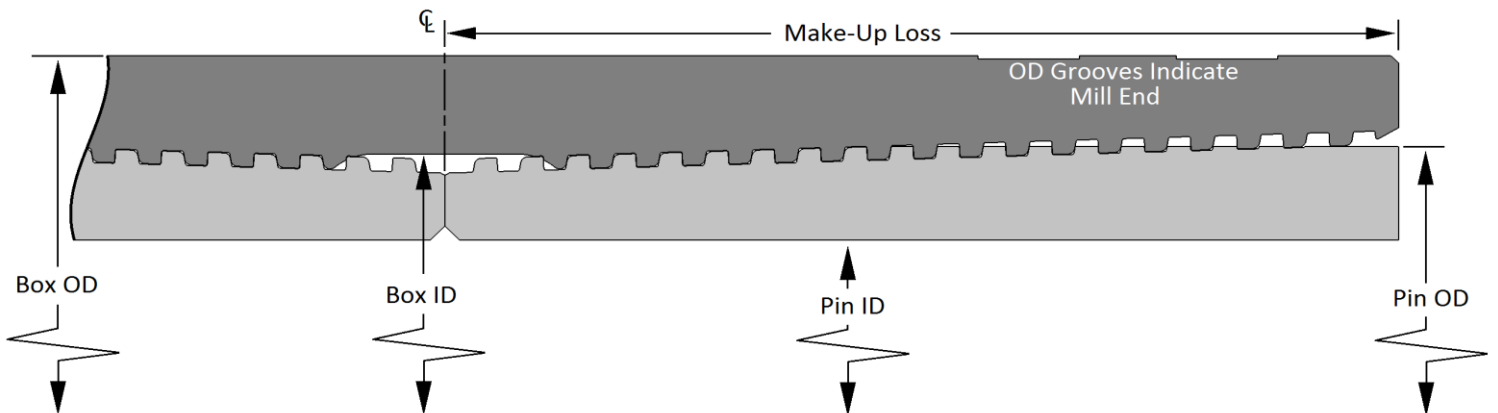

*Data is for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.

rev 0

19996 Hickory Twig Way Spring, TX 77388
 Phone: (281) 602-7550
 Fax: (281) 602-7557