

REMOVAL OF TOC AND COD FROM MUNICIPAL SOLID WASTE LEACHATE USING ALUMINIUM ELECTRODE IN ELECTROCOAGULATION

D. Sivakumar¹, D. Shankar², M. Mohana³

¹Department of Civil Engineering, Vel Tech High Tech Dr. Rangarajan Dr. Sakunthala Engineering College, Avadi 600 062, Chennai, Tamil Nadu, India

² & ³Department of Pharmaceutical Chemistry, K.M. College of Pharmacy, Uthangudi 625 107, Madurai, Tamil Nadu, India

ABSTRACT—This study was focused on removal of TOC and COD in a municipal solid waste dumping yard using the method called electrocoagulation method. The experimental investigations have been carried out by using electrocoagulation method for different temperature, different agitation speed, different concentration and different current densities with aluminium electrodes. The results showed that the maximum percentage removal of TOC and COD in a leachate was obtained was 88.3 % and 91.1 % respectively and this could be achieved at the optimum temperature of 50 °C, optimum agitation speed of 50 rpm, optimum concentration of 25 % and optimum current density of 40 mA/cm² by electrocoagulation method. Further, the experimental data is verified with the test conducted on removal other parameters available in leachate against the same optimum process parameters value. From the validation test, it was found that the maximum removal was occurred at the identified optimum process parameters value. Thus, this study concluded that electrocoagulation method was effectively used for removing TOC and COD in a leachate of municipal solid waste dumping yard.

Keywords—Municipal solid waste leachate, TOC, COD, Electrocoagulation, Fe Electrode, Process parameters

1. INTRODUCTION

Among the various sources of surface water and groundwater contamination, the leachate from municipal solid waste dumping yard stands out as one of the most important, because it generates a considerable high concentrated liquid contains high concentrations of organic matter and inorganic matter along with other properties like total dissolved solids, suspended solids, phenols, chlorides, ammonia, and heavy metals. In the recent years, increasing awareness was created to minimizing surface water and groundwater contamination.

The leachate when percolate through soil is generally contaminated the surface water and groundwater, results increased water pollution [6]. There are several processes that can be adopted for the treatment of municipal solid waste leachate such as chemical precipitation, sedimentation, adsorption [2,4,14], ion exchange, biological

operations, bioremediation [3,5,10,16], biosorption [6], bioaccumulation [8,15] cementation, coagulation / flocculation, filtration and membrane processes, and solvent extraction.

But due to certain limitations either in terms of cost or technology or time consumption, an alternative method was pursued to treat the leachate coming from the municipal solid waste dumping yard. Once such process is known as electrocoagulation process and it has gained a lot of attention in recent past. Compared to traditional methods, electrocoagulation process offers (1) versatility, since it may be used to treat liquid and solid waste by direct and indirect organic compound oxidation, metal reduction and electro deposition, it also offers (2) environmental compatibility, and since electrocoagulation process is mediated by electron exchange with the electrode surface, dismissing the need for the addition of other chemical agents [7,9,11,12,13,17,18].

Thus, this study mainly focused on removal of organic matter in terms of total organic content (TOC) and inorganic content in terms of chemical oxygen demand (COD) from the Municipal solid waste leachate using electrocoagulation method. This study is concentrated only for the removal of TOC and COD in a leachate from the municipal solid waste dumping yard by electrocoagulation method. In order to investigate the consistency, experimental data obtained in this study were validated with the removal of other parameters in a leachate against the identified optimum process parameters value.

2. MATERIALS AND METHODS

A. Collection of Wastewater Sample

For the present study, the leachate sample was collected from Municipal solid waste dumping yard, Ambatore Industrial Estate, Chennai with the help of air tight sterilized bottles covered with ice cubes. Samples were taken to the Environmental Engineering Laboratory, kept at 4 °C for analyzing the various parameters from the leachate in later stage. The analyses were carried out for TOC and COD along with other properties as given in Table 1.

B. Experimental Arrangement

The setup consists of a glass beaker, magnetic stirrer apparatus with hot plate, a D.C. power supply, volt meter, ammeter, resistor and Fe electrodes. The electrodes were separated by a space of 2.5 cm and dipped in leachate. The electrodes were placed into 200 ml wastewater in a 250 ml beaker. The anode and cathode were connected in a monopolar mode in the beaker. The D.C source was used to power supply the system with 0-15V and 0-3A.

TABLE 1

PHYSICO-CHEMICAL CHARACTERISTICS OF MUNICIPAL SOLID WASTE LEACHATE

Sl.No.	Properties	Values
1	pH	6.3
2	EC	38 $\mu\text{s/cm}$
3	TDS	5423 mg/l
4	TS	8960 mg/l
5	TOC	4680 mg/l
6	BOD	5860 mg/l
7	COD	11350 mg/l
8	Sulphate	689 mg/l
9	Chloride	865 mg/l
10	Phenols	355 mg/l
11	Cu	40 mg/l
12	Ni	32 mg/l
13	Cr	63 mg/l
14	Zn	98 mg/l
15	Cd	17 mg/l

C. Treatment by Electrocoagulation

The municipal solid waste leachate sample was treated with the help of magnetic stirrer apparatus and aluminium electrodes. This method consists of batch experiments involving variations in temperatures such as 30, 40, 50 and 60 °C, agitation speeds of 25, 50, 75 and 100 rpm, concentrations 25, 50, 75 and 100 % and current densities 20, 30, 40 and 50 mA/cm². Leachate was taken in a glass beaker of 250 ml capacity and was kept on the magnetic stirrer apparatus for contaminants reduction against various process parameters. The treated sample was allowed to settle for the duration of 2 hours and then filtered with Whatman filter paper. The filtered sample was tested for various parameters as per the standard procedure stipulated by APHA,2005 [1].

The removal percentage of various parameters in a leachate by electrocoagulation was calculated by using the following formula:

$$\frac{(C_1 - C_2)}{C_1} \times 100$$

Percentage Removal = (1)

in which C1 and C2 are the concentration of various parameters in a leachate, expressed in mg/l except pH and EC before and after treatment with electrocoagulation method.

3. RESULTS AND DISCUSSIONS

In the present study, removal of TOC and COD in a leachate by electrocoagulation is presented in detail and the reduction of other properties of leachate (Table 1) was not presented. The experimental investigations have been carried out by using electrocoagulation method for different temperature, different agitation speed, different concentration and different current densities with aluminium electrode (both anode and cathode). The results are presented below.

3.1 Effect of Temperature

The Fig.1 shows the effect of temperature on removal of TOC and COD in a leachate by electrocoagulation. The chosen temperatures for this study are 30, 40, 50 and 60 °C. The result was presented for the parameters TOC and COD against the temperature of 50°C only not for other temperatures, since, for the temperature of 50°C maximum removal was obtained. Further, the effect of temperature was done against the agitation speed of 25 rpm, the concentration of 100 % and the current density of 20 mA/cm².

From Fig.1, it may be observed that the maximum percentage removal of TOC in a leachate by electrocoagulation is 74.8 % for the temperature 50 °C. Similarly, the maximum removal of COD in a leachate by electrocoagulation is 78.1 % for the temperature 50 °C. Thus, an optimum temperature for which maximum removal of TOC and COD is found to be 50 °C.

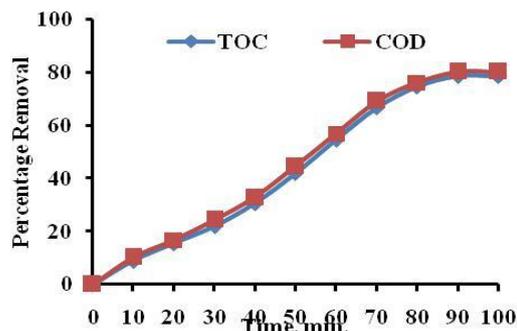


Fig.1 Maximum removal of TOC and COD in a leachate against the optimum temperature of 50 °C, agitation speed of 25 rpm, the concentration of 100 % and the current density of 20 mA/cm²

It was found that as the temperature increased from 30 to 50 °C, the percentage removal of TOC and COD was increased and beyond which, there was no much difference of percentage removal for the parameter TOC and COD in a leachate. In other words, the same removal percentage of TOC and COD was obtained for the temperature 50 °C and 60°C by electrocoagulation method. The order of higher removal percentage was found to be COD followed by TOC in a leachate.

3.2 Effect of Agitation Speed

The Fig.2 shows the effect of agitation speed on removal of TOC and COD in a leachate by electrocoagulation. The chosen agitation speed for this study is 25, 50, 75 and 100 rpm. The result was presented for the parameters TOC and COD against the agitation speed of 50 rpm only not for other agitation speeds, since, for the agitation speed of 50 rpm, maximum removal was obtained. Further, the effect of agitation speed was done against the optimum temperature of 50 °C, the concentration of 100 % and the current density of 20 mA/cm².

From Fig.2, it may be observed that the maximum percentage removal of TOC in a leachate by electrocoagulation is 76.8 % for the agitation speed of 50 rpm. Similarly, the maximum removal of COD in a leachate by electrocoagulation is 81.3 % for the agitation speed of 50 rpm. Thus, an optimum agitation speed for which maximum removal of TOC and COD is found to be 50 rpm.

It was found that as the agitation speed increased from 25 to 50 rpm, the percentage removal of TOC and COD was increased and beyond which, there was no much difference of percentage removal for the parameter TOC and COD in a leachate for the agitation speed of 50, 75 and 100 rpm. In other words, the same removal percentage of TOC and COD was obtained for the agitation speed of 50, 75 and 100 rpm by electrocoagulation method. As similar to effect of temperature, the order of higher removal percentage was found to be COD followed by TOC in a leachate by agitation speed.

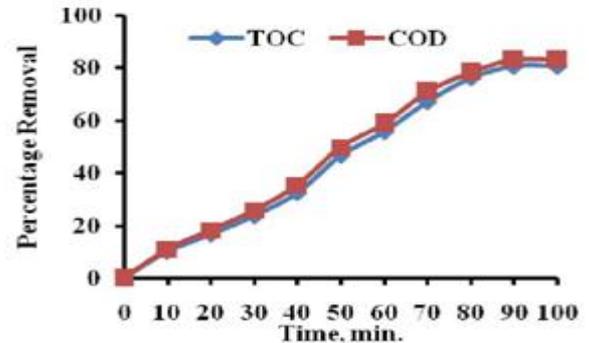


Fig.2 Maximum removal of TOC and COD in a leachate against the optimum agitation speed of 50 rpm, the optimum temperature 50 °C, the concentration of 100 % and the current density of 20 mA/cm²

3.3 Effect of Concentration

The Fig.3 shows the effect of concentration on removal of TOC and COD in a leachate by electrocoagulation. The chosen concentration for this study is 25, 50, 75 and 100 %. The result was presented for the parameters TOC and COD against the concentration of 25 % only, not for other concentrations, since, for the concentration of 25 %, maximum removal was obtained. Further, the effect of concentration was done against the optimum temperature of 50 °C and an optimum agitation speed of 50 rpm and the current density of 20 mA/cm².

From Fig.3, it may be observed that the maximum percentage removal of TOC in a leachate by electrocoagulation is 83.9 % for the 25 % concentration of leachate. Similarly, the maximum removal of COD in a leachate by electrocoagulation is 86.1 % for the 25 % concentration. Thus, an optimum concentration for which maximum removal of TOC and COD is found to be 25 %.

It was found that as the concentration decreased from 100 to 25 %, the percentage removal of TOC and COD was increased. As similar to effect of temperature and agitation speed, the order of higher removal percentage was found to be COD followed by TOC in a leachate by the effect of concentration.

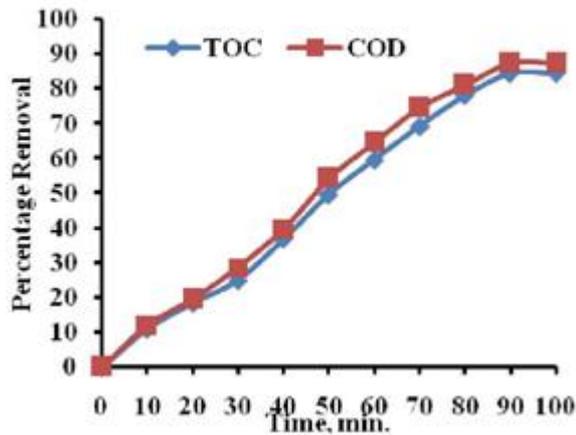


Fig.3 Maximum removal of TOC and COD in a leachate against the optimum concentration of 25 %, the optimum temperature 50 °C, optimum agitation speed of 50 rpm and the current density of 20 mA/cm²

3.4.Effect of Current density

The Fig.4 shows the effect of current density on removal of TOC and COD in a leachate by electrocoagulation. The chosen current densities for this study are 20, 30, 40 and 50 mA/cm². The result was presented for the parameters TOC and COD against the current density of 40 mA/cm² only, not for other current densities, since, for the current density of

mA/cm², maximum removal was obtained. Further, the effect of current density was done against the optimum temperature of 50 °C, an optimum agitation speed of 50 rpm and optimum concentration of 25 %.

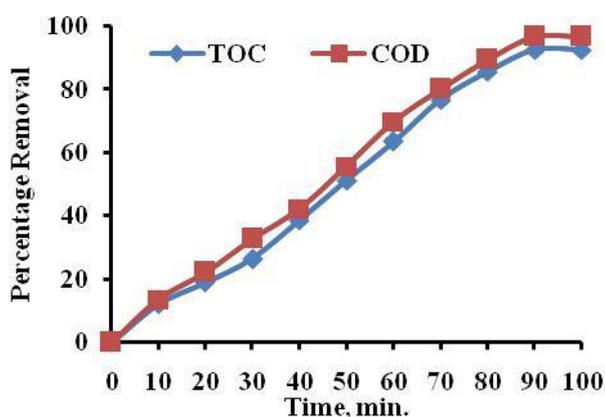


Fig.4 Maximum removal of TOC and COD in a leachate against the optimum current density of 40 mA/cm², optimum temperature 50 °C, optimum agitation speed of 50 rpm and the optimum concentration of 25 %

From Fig.4, it may be observed that the maximum percentage removal of TOC in a leachate by electrocoagulation is 88.3 % for the current density of 40 mA/cm². Similarly, the maximum removal of COD in a leachate by electrocoagulation is 91.1 % for the current density of 40 mA/cm². Thus, an optimum current density for which maximum removal of TOC and COD is found to be 40 mA/cm².

It was found that as current density increased from 20 to 40 mA/cm², the percentage removal of TOC and COD was increased and beyond which, there was no much difference of percentage removal for the parameter TOC and COD in a leachate for the current density of 50 mA/cm². In other words, the same removal percentage of TOC and COD was obtained for the current density of 40 mA/cm² and 50 mA/cm² by electrocoagulation method. As similar to effect of temperature, agitation speed and concentration, the order of higher removal percentage was found to be COD followed by TOC in a leachate by the effect of current density.

From Figs.1 to 4, this study was found that the maximum removal of TOC and COD in a leachate of municipal solid waste was completed in 90 min. against the various selected process parameters.

3.5.Validation Test

In order to verify the experiments conducted for the removal of TOC and COD in a leachate of municipal solid waste, a separate experiments were conducted for removing various other parameters present in a leachate of municipal solid waste at an optimum current density of 40 mA/cm², optimum temperature 50 °C, optimum agitation speed of 50 rpm and the optimum concentration of 25 %. The initial and final concentration of various other parameters like EC, TDS, TS, BOD, sulphate, chloride and phenols using electrocoagulation is presented in Table 2.

TABLE 2

THE INITIAL AND FINAL CONCENTRATION OF VARIOUS OTHERPARAMETERS CHARACTERISTICS OF MUNICIPAL SOLID WASTE LEACHATE

Sl.No.	Parameters	Initial Concentration	Final Concentration
1	EC	38.00	33.17
2	TDS	5423.00	4864.43
3	TS	8960.00	7356.16
4	BOD	5860.00	5514.26
5	Sulphate	689.00	600.81
6	Chloride	865.00	736.98
7	Phenols	355.00	279.03

The maximum removal percentage of verification test for the parameters TOC, COD, EC, TDS, TS, BOD, sulphate, chloride and phenols are presented in the Fig.5.

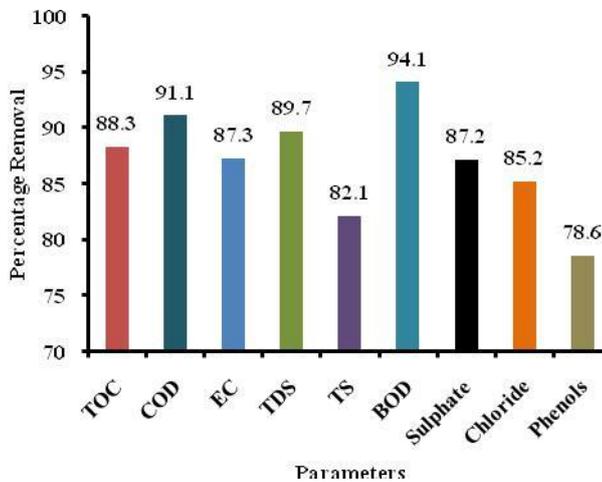


Fig.5 Maximum Removal Percentage for Various Parameters in a leachate of municipal solid waste at the optimum current density of 40 mA/cm², optimum temperature 50 °C, optimum agitation speed of 50 rpm and the optimum concentration of 25 %

From the Fig. 5, it may be observed that the maximum percentage removal of various parameters like TOC, COD, ED, TDS, TS, BOD, sulphate, chloride and phenols are 88.3, 91.1, 87.3, 89.7, 82.1, 94.1, 87.2, 85.2 and 78.6 % respectively. This maximum removal for various parameters was obtained at an optimum current density of 40 mA/cm², optimum temperature 50 °C, optimum agitation speed of 50 rpm and optimum concentration of 25%. Thus, this study concluded that the electrocoagulation method was used effectively for removing TOC and COD in a municipal solid waste leachate, in addition to other parameters also.

4. CONCLUSIONS:

In the present study, experiments have been conducted for removal of TOC and COD in a leachate of municipal solid waste dumping yard using electrocoagulation. The ability of electrocoagulation for removing TOC and COD in a leachate, the experiments was conducted for different temperatures, agitation speeds, concentrations and current densities. The results showed that the maximum percentage removal of TOC and COD was 88.3 % and 91.1 % respectively at the optimum temperature of 50 °C, optimum agitation speed of 50 rpm, optimum concentration of 25 % and optimum current density of 50 mA/cm². Further, the order of maximum removal was found to be COD followed by TOC for those selected process parameters. The maximum removal was completed in the duration of 90 min.

The experimental investigation was verified and the results of the verification tests and showed that the maximum removal of other parameters in a leachate of municipal solid waste was also occurred at the same the optimum temperature of 50 °C, optimum agitation speed of 50 rpm, optimum concentration of 25 % and optimum current density of 50 mA/cm². Thus, this study concluded that the electrocoagulation method was used effectively for removing TOC and COD in a municipal solid waste leachate.

5. REFERENCES

- [1] APPA, AWWA and WEF. (2005). "Standard methods for the examination of water and wastewater". 20th edition, APHA Publication, Washington D.C.
- [2] D. Shankar, D. Sivakumar, M. Thiruvengadam, M. Manojkumar, (2014), Colour removal in a textile industry wastewater using coconut coir pith, *Pollution Research*, Vol. 33, pp. 490-503.
- [3] D. Shankar, D. Sivakumar, R. Yuvaraj, (2014), Chromium (VI) removal from tannery industry wastewater using fungi species, *Pollution Research*, Vol. 33, pp. 505-510.
- [4] D. Sivakumar, (2014), Role of low cost agro-based adsorbent to treat hospital wastewater, *Pollution Research*, Vol. 33, pp. 573-576.
- [5] D. Sivakumar, A.N. Kandaswamy, V. Gomathi, R. Rajeshwaran and N. Murugan, (2014), Bioremediation studies on reduction of heavy metals toxicity, *Pollution Research*, Vol. 33, pp. 553-558.
- [6] D. Sivakumar, D. Shankar, A.J.R. VijayaPrathima, M. Valarmathi, (2013), Constructed wetlands treatment of textile industry wastewater using aquatic macrophytes, *International Journal of Environmental Science*, Vol. 3, pp. 1223-1232.
- [7] D. Sivakumar, D. Shankar, A.N. Kandaswamy and M. Ammaippan, (2014), Role of electro-dialysis and electro-dialysis cum adsorption for chromium (VI) reduction, *Pollution Research*, Vol. 33, pp. 547-552.
- [8] D. Sivakumar, D. Shankar, P. Dhivya, K. Balasubramanian, (2014), Bioaccumulation study by lemna gibba lin., *Pollution Research*, Vol. 33, pp. 531-536.
- [9] D. Sivakumar, D. Shankar, V. Gomathi and A. Nandakumar, (2014), Application of electro-dialysis on removal of heavy metals, *Pollution Research*, Vol. 33, pp. 627-637.
- [10] D. Sivakumar, G. Gayathri, R. Nishanthi, V. Vijayabharathi, Sudeshna Das, R. Kavitha, (2014), Role of fungi species in colour removal from textile industry

wastewater, International Journal of ChemTech Research, Vol. 6, pp. 4366-4372.

- [11] Hansen, H.K., Nunez, P., Raboy, D., Schippacase, I., and Grandon, R., (2007). "Electrocoagulation in wastewater containing arsenic: Comparing different process designs," *ElectrochimicaActa*, 52, 3464-3470.
- [12] Lin, S.H. and Peng, C.F. (1994). "Treatment of textile wastewater by electrochemical method". *Water Res.*, 28, 277-283.
- [13] Lu, H., Wang, J., Yan, B., and Bu, S., (2010). "Recovery of nickel ions from simulated electroplating rinse water by electrodeionization process", *Water Science and Technology*, 61, 729-735.
- [14] Sivakumar, D., (2015). Hexavalent chromium removal in a tannery industry wastewater using rice husk silica, *Global Journal of Environmental Science and Management*, 1(1), 27-40
- [15] Sivakumar, D., (2015). Removal of contaminants in a paper mill effluent by *Azolla caroliniana*, *Global Journal of Environmental Science and Management*, 1(4), 297-304.
- [16] Sivakumar, D., (2016). Biosorption of hexavalent chromium in a tannery industry wastewater using fungi species, *Global Journal of Environmental Science and Management*, 2(2), 105-124
- [17] Tchamango, S., Nanseu-Njiki, C.P., Ngameni, E Hadjiev, D., and Darchen, A., (2010). "Treatment of dairy effluents by electrocoagulation using aluminium electrodes", *Science of the Total Environment*, 408, 947-952.
- [18] Vasudevan, S., Lakshmi, J., and Sozhan, G., (2009). "Studies on the removal of iron from drinking water by electrocoagulation – A clean process", *Clean: Soil, Air Water*, 37, 45-51.