

Information Sheet


SafetyShroud™, when used properly, meets the WCMA and ANSI Standards (appendix D) for child safety by preventing access to the lift cords and the formation of hazardous loops on Roman Shades.

- Easy to use.
- No sewing required.
- Available in 100 yard and 500 yard spools.
- Standard colors are white, vanilla, camel and dark brown.
- Custom colors are available for minimum orders of 500 yards.

FABRICATION INFORMATION

To ensure Roman Shades made with SafetyShroud™ meet the standards:

- Battens or ribs should not be further than 7½" apart from each other.
- If tying off the shroud at the uppermost ring, that ring should be no more than 12" from the top of the headboard.
- The shroud should be permanently attached to each lift ring and the lift cord should weave in and out of every opening in the shroud.
- RollEase® recommends knotting the shroud around each lift ring. The shroud can also be sewn to each lift ring but be certain that the stitching is strong enough to prevent breakage. If the shroud disconnects from the lift ring, the shade will no longer be compliant.

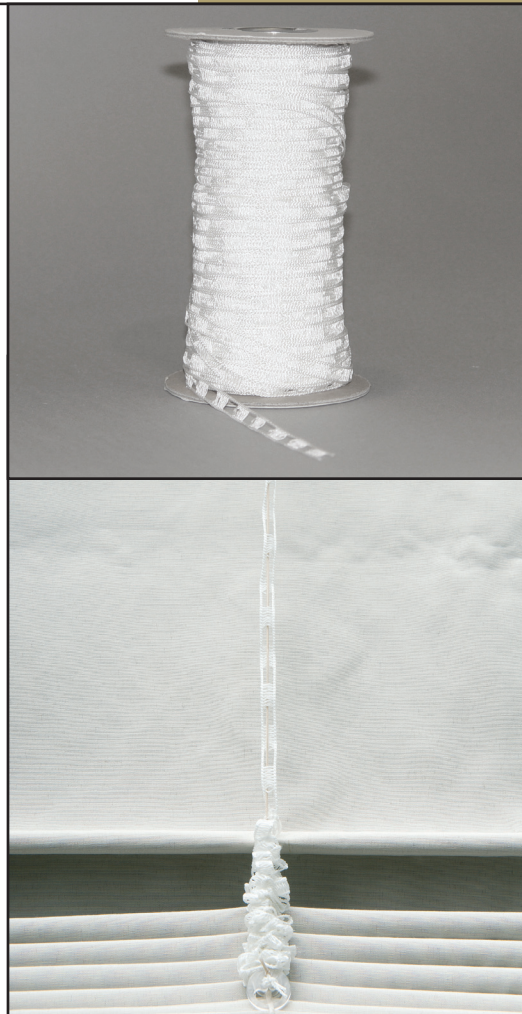

Part Name

SafetyShroud™ White, 100 yards
SafetyShroud™ White, 500 yards

SafetyShroud™ Vanilla, 100 yards
SafetyShroud™ Vanilla, 500 yards

SafetyShroud™ Camel, 100 yards
SafetyShroud™ Camel, 500 yards

SafetyShroud™ Dark Brown, 100 yards
SafetyShroud™ Dark Brown, 500 yards

SafetyShroud™ Custom Color, 500 yards

Part Number

CSS100W
CSS500W

CSS100V
CSS500V

CSS100320
CSS500320

CSS100379
CSS500379

CSS500XXX