


Front Sides 46 x 7 1/4 x 1 5 ½ x 8 x 1

Assemble sides and front as shown with wood glue and screws. Use cabinet hinges to attach both assemblies.



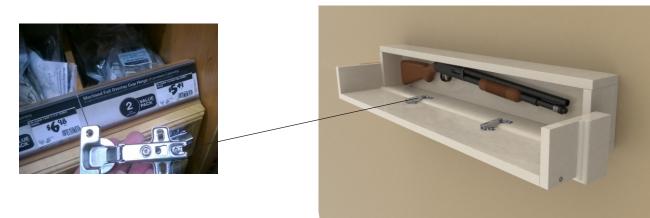

Once both the wall and front assembly are attached molding can be used to clad the front and sides of the floating shelf.







We reccomend flat head torque screws as show. Use a stud finder to find location of wood wall studs. Then attach unit to wall stud with screw. Use a level to adjust before adding additional screws to minimum of three studs.



The front assembly folds away leaving display items in place and allowing easy access to firearm. Please note this is not a secure gun safe. Please use trigger guards and proper gun precautions.

