

1.0" REVEAL SEAM PANEL, VENTED

TEMPLE
Architectural Products





Available Material

Steel: 26 ga, 24 ga, 22 ga
Aluminum: .032, .040
Copper: 16 oz, 20 oz


Standard and Metallic Colors: 29
Available Finishes: Kynar 500/Hylar 5000, SP

Test Data:

- Custom widths available upon request

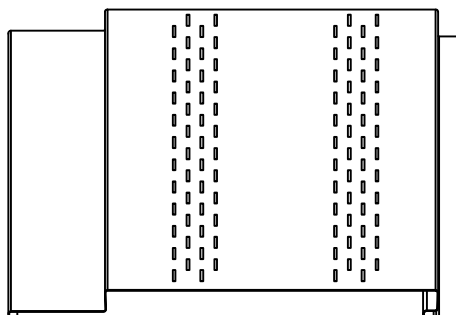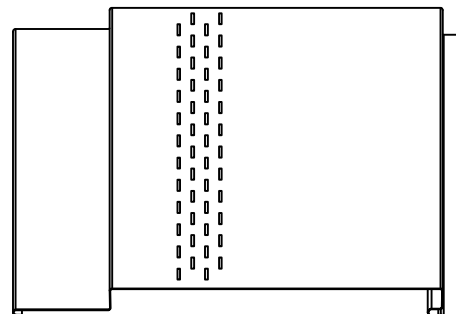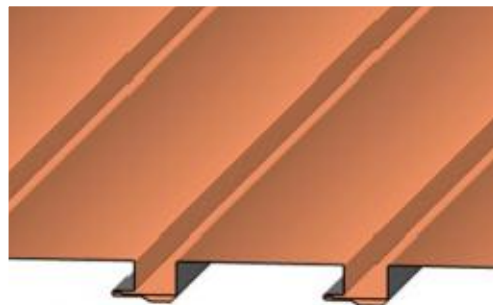

1" FLUSH PANEL WITH 1 ROW
OF PANEL VENTING (VENTING LOCATION
IS ADJUSTABLE), REVEAL IN $\frac{1}{2}$ "
INCREMENTS FROM 0" TO 3"



1" FLUSH PANEL WITH 2 ROWS
OF PANEL VENTING, REVEAL IN $\frac{1}{2}$ "
INCREMENTS FROM 0" TO 3"

Notes:

- It is recommended to use stiffener beads for wider panel faces in order to minimize "oil canning". Oil canning is not a cause for rejection.
- 2" wide stiffening beads are available.

Panel information and description:

TIS: 720-010

The Flush Seam Panel offers a concealed fastener and a tongue & groove seam that allows for thermal movement due to changes in ambient temperatures. The panel can be installed over solid substrates or over open perlins (upon review). Panel configurations can include low bead stiffeners, centerline V-Bean, one or two rows of venting (3.08 square inches of venting, per row, per linear foot of panel). Many of the colors are Energy Star compliant; see color chart for applicable data and colors. Custom colors are available upon request (minimum and overages will apply).

Temple Architectural Products
1111 Lowell St.
Elyria, OH 44035

Phone: (440) 323-9393

Fax: (440) 412-7559