



# FULL LINE

LOG SPLITTERS | TRENCHERS | EARTH AUGERS | PRESSURE WASHERS





DESIGNED, ENGINEERED &  
ASSEMBLED IN THE USA

We use the best components available so you won't be plagued with unexpected downtime. Our customers praise the ease of handling and durability of our products, our clear and simple assembly instructions and the responsiveness of our knowledgeable and experienced, Midwest-based team of customer service representatives.



The Brave Pro line offers consumers equipment with high grade features suitable for professional use.

**Watch for the BRAVEPRO logo within!**

**CHECK OUT OUR VIDEO LIBRARY**  
[braveproducts.com](http://braveproducts.com)



**LOG SPLITTERS**



**TRENCHERS**



**EARTH AUGERS**



**PRESSURE WASHERS**





## EQUIPMENT THAT DELIVERS

### HISTORY

✓ We've been building high quality equipment for over 30 years.

### CUSTOMER SERVICE

✓ Our knowledgeable Midwest-based team is happy to assist you.

### PARTS AVAILABILITY

✓ With hundreds of parts on hand, we make sure you're up and running again soon.

### WARRANTY

✓ A limited 2-year consumer / 1 -year commercial warranty comes standard with all Brave equipment.





# HORIZONTAL SPLITTERS



## OPERATING CONTROLS

Easy to use split control lever allows operator to move the wedge forward and backward.

## CARBON WEDGE

The 6" wedge (15 ton) has one tapered edge that makes splitting easier. The 8" wedge (20 ton) has two tapered edges to allow easier splitting in both directions.

## 2" BALL HITCH

Hitch and chains are standard for easy towing.

## LOG TABLE

Save your back! The log table is designed to catch logs immediately after splitting. You won't need to bend down to pick-up split wood. Table can easily be removed, if desired, when traveling from each destination.

## HONDA POWERED

Honda engine for powerful and reliable performance.

PCLS2013GC shown

\*Standard on PCLS2013GC only



## LOG SPLITTER COVER

Protects your log splitter from the harsh weather elements.

Item # GNE-1100-CVR

// This log splitter  
(PCLS2013GC) is very  
fast and splits any size  
log I've put on it. //

**Brave Customer**  
Millville, NE



# 2X FASTER\*

with dual action wedge  
you'll cut your splitting  
time in half

\*PCLS2013GC only

**PCLS1513GC**

**15  
TON**



| Operation           | Horizontal        |
|---------------------|-------------------|
| Splitting Force     | 15 Ton            |
| Cords Per Season    | 2-50              |
| Engine Brand        | Honda GC160       |
| Engine Starter      | Recoil            |
| Engine CC           | 160cc             |
| Max. Log Length     | 18"               |
| Max. Log Diameter   | 12"               |
| Wedge Material/Size | 6" Carbon Steel   |
| Auto Return         | Yes               |
| Hydraulic Capacity  | 2.25 Gallons      |
| Cycle Time          | 8 Seconds         |
| Cylinder Diameter   | 3.5"              |
| Cylinder Length     | 18"               |
| Fenders             | No                |
| Max. Towing Speed   | 35 MPH            |
| Log Cradle          | No                |
| Weight              | 240 lbs           |
| Bed Height          | 24"               |
| Dimensions (LxWxH)  | 63" x 40" x 40.5" |
| Consumer Warranty   | 2 Year Limited    |
| Commercial Warranty | 1 Year Limited    |

**PCLS2013GC**

**20  
TON**



| Operation           | Horizontal              |
|---------------------|-------------------------|
| Splitting Force     | 20 Ton                  |
| Cords Per Season    | 2-100                   |
| Engine Brand        | Honda GC160             |
| Engine Starter      | Recoil                  |
| Engine CC           | 160cc                   |
| Max. Log Length     | 24"                     |
| Max. Log Diameter   | 16"                     |
| Wedge Material/Size | 8" Carbon Steel (2-Way) |
| Auto Return         | N/A                     |
| Hydraulic Capacity  | 3 Gallons               |
| Cycle Time          | 7 Seconds               |
| Cylinder Diameter   | 4"                      |
| Cylinder Length     | 24"                     |
| Fenders             | No                      |
| Max. Towing Speed   | 45 MPH                  |
| Log Cradle          | Included                |
| Weight              | 360 lbs                 |
| Bed Height          | 28"                     |
| Dimensions (LxWxH)  | 62" x 39" x 33"         |
| Consumer Warranty   | 2 Year Limited          |
| Commercial Warranty | 1 Year Limited          |





# HORIZONTAL/VERTICAL SPLITTERS

## CARBON WEDGE

Wedge has a tapered edge to allow easier splitting.

## LOG DISLODGER

Standard on all horizontal/vertical models (except XR1322BS), the log dislodger helps eject any log that sticks on the slide wedge.

## 2" BALL HITCH

Hitch and chains are standard for easy towing.



## FENDERS

Standard on 26–34 ton models, fenders provide added towing protection.

## HONDA POWERED

Honda engine for powerful and reliable performance.

VH1322GC shown



## LOG SPLITTER COVER

Protects your log splitter from the harsh weather elements.

Item # GNE-1100-CVR

// I've had my splitter  
for 12 years now... it splits  
about 40-50 rick  
a year. //

Jeremy Steinkamp  
Brownstown, IN




## LOG DISLODGER STANDARD

\*Except XR1322BS

XR1322BS

22  
TON

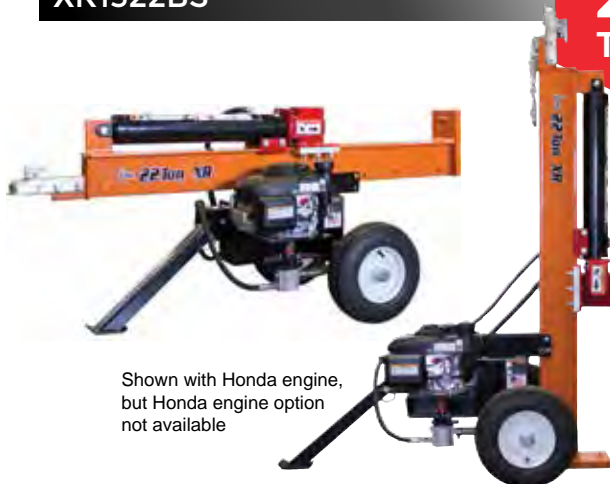

Shown with Honda engine,  
but Honda engine option  
not available

VH1322GC/GX

22  
TON



| Operation           | Horizontal/Vertical |
|---------------------|---------------------|
| Splitting Force     | 22 Ton              |
| Cords Per Season    | 2-100               |
| Engine Brand        | Briggs & Stratton   |
| Engine Starter      | Recoil              |
| Engine CC           | 190cc               |
| Max. Log Length     | 25"                 |
| Max. Log Diameter   | 14"                 |
| Wedge Material/Size | 6.5" MFD Steel      |
| Auto Return         | Yes                 |
| Hydraulic Capacity  | 5.4 Gallons         |
| Cycle Time          | 15 Seconds          |
| Cylinder Diameter   | 4"                  |
| Cylinder Length     | 24"                 |
| Fenders             | No                  |
| Max. Towing Speed   | 35 MPH              |
| Log Cradle          | No                  |
| Weight              | 390 lbs             |
| Bed Height          | 27"                 |
| Dimensions (LxWxH)  | 81" x 39" x 36"     |
| Consumer Warranty   | 2 Year Limited      |
| Commercial Warranty | 1 Year Limited      |

| Operation           | Horizontal/Vertical |
|---------------------|---------------------|
| Splitting Force     | 22 Ton              |
| Cords Per Season    | 2-150               |
| Engine Brand        | Honda GC160 / GX160 |
| Engine Starter      | Recoil              |
| Engine CC           | 160cc / 163cc       |
| Max. Log Length     | 24"                 |
| Max. Log Diameter   | 16"                 |
| Wedge Material/Size | 7.5" Carbon Steel   |
| Auto Return         | Yes                 |
| Hydraulic Capacity  | 5.4 Gallons         |
| Cycle Time          | 14 Seconds          |
| Cylinder Diameter   | 4"                  |
| Cylinder Length     | 24"                 |
| Fenders             | No                  |
| Max. Towing Speed   | 35 MPH              |
| Log Cradle          | Optional            |
| Weight              | 530 lbs             |
| Bed Height          | 26"                 |
| Dimensions (LxWxH)  | 81.5" x 40" x 36"   |
| Consumer Warranty   | 2 Year Limited      |
| Commercial Warranty | 1 Year Limited      |



## LOG SPLITTER COVER

Protects your log splitter from the harsh weather elements.

Item # GNE-1100-CVR

“ Outstanding customer service and top line products... I continue to sing Brave's praises. ”

Greg Pink  
Cedar Rapids, IA



## LOG DISLODGER STANDARD

VH1326GX/VN

26  
TON



VH1334GX/VN

34  
TON




| Operation           | Horizontal/Vertical           |
|---------------------|-------------------------------|
| Splitting Force     | 26 Ton                        |
| Cords Per Season    | 2-250                         |
| Engine Brand        | Honda GX270 / Briggs Vanguard |
| Engine Starter      | Recoil                        |
| Engine CC           | 270cc / 305cc                 |
| Max. Log Length     | 24"                           |
| Max. Log Diameter   | 16"                           |
| Wedge Material/Size | 7.5" Carbon Steel             |
| Auto Return         | Yes                           |
| Hydraulic Capacity  | 5.4 Gallons                   |
| Cycle Time          | 12 Seconds                    |
| Cylinder Diameter   | 4.5"                          |
| Cylinder Length     | 24"                           |
| Fenders             | Included                      |
| Max. Towing Speed   | 35 MPH                        |
| Log Cradle          | Optional                      |
| Weight              | 555 lbs                       |
| Bed Height          | 26"                           |
| Dimensions (LxWxH)  | 81.5" x 40" x 36"             |
| Consumer Warranty   | 2 Year Limited                |
| Commercial Warranty | 1 Year Limited                |

| Operation           | Horizontal/Vertical           |
|---------------------|-------------------------------|
| Splitting Force     | 34 Ton                        |
| Cords Per Season    | 2-500                         |
| Engine Brand        | Honda GX270 / Briggs Vanguard |
| Engine Starter      | Recoil                        |
| Engine CC           | 270cc / 305cc                 |
| Max. Log Length     | 24"                           |
| Max. Log Diameter   | 16"                           |
| Wedge Material/Size | 7.5" Carbon Steel             |
| Auto Return         | Yes                           |
| Hydraulic Capacity  | 9.5 Gallons                   |
| Cycle Time          | 15 Seconds                    |
| Cylinder Diameter   | 5"                            |
| Cylinder Length     | 24"                           |
| Fenders             | Included                      |
| Max. Towing Speed   | 35 MPH                        |
| Log Cradle          | Optional                      |
| Weight              | 700 lbs                       |
| Bed Height          | 33"                           |
| Dimensions (LxWxH)  | 93" x 49.5" x 42"             |
| Consumer Warranty   | 2 Year Limited                |
| Commercial Warranty | 1 Year Limited                |





1

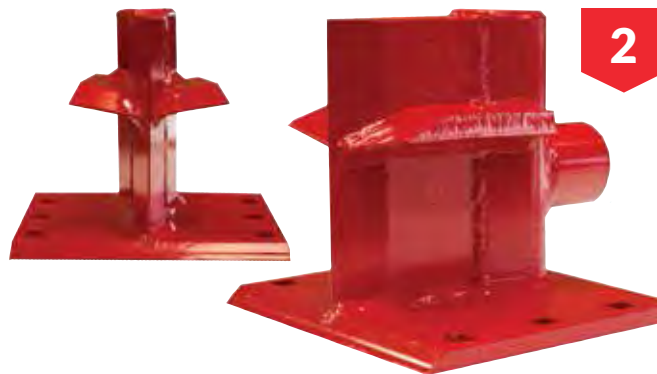

2




3

Brave models manufactured in 2014 and earlier will require Item # BR021172-14 to use 4-way wedge.



4

\*Standard on all 34 ton models.

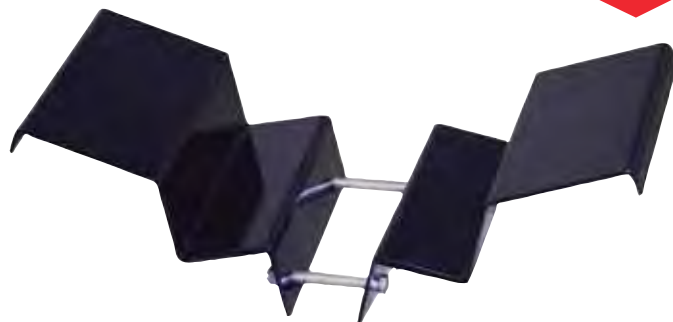

5

\*Standard on all 22 ton and 26 ton models.



6

\*Standard on all XR & VH Series splitters.



7



8

\*Does not fit XR Series.

## LOG SPLITTER ACCESSORIES

Hardware included where necessary.

### 1. 10' Hose Kit

TMH 10' HOSE KIT

Two 10' hydraulic hoses each with one male 1/2" NPT and one male quick-connect fitting.

### 2. 4-Way Wedge

BR021175

Quickly split large logs into small pieces.

### 3. Engine Guard

BR021248

Protects your splitter's engine from falling split logs.

### 4. Log Cradle

BR021186

Log cradle catches split logs and serves as a work table for large logs.

### 5. Log Cradle

BR021181

Log cradle catches split logs and serves as a work table for large logs.

### 6. Log Dislodger

BR021172-14

Ejects logs that stick to the splitting wedge protecting the control valve and other hydraulic components from damage.

### 7. Log Splitter Cover

GNE-1100-CVR

Protects your log splitter from harsh weather elements.

### 8. Safety Flag Kit

BR012104

Improves visibility of log splitter when backing up or towing.



# TRACTOR MOUNT SPLITTERS

## CARBON WEDGE

The 6" wedge or 8" wedge has two tapered edges to allow easier splitting in both directions.

## OPERATING CONTROLS

Easy to use split control lever allows operator to move the wedge forward and backward.


## TRACTOR MOUNT

Category 1, 3-point hitch for convenient attachment to your tractor.

TMH2015 shown

## LOG TABLE

Save your back! Log table is designed to catch logs immediately after splitting. You won't need to bend down to pick-up split wood. Table can easily be removed if desired, when traveling from each destination.

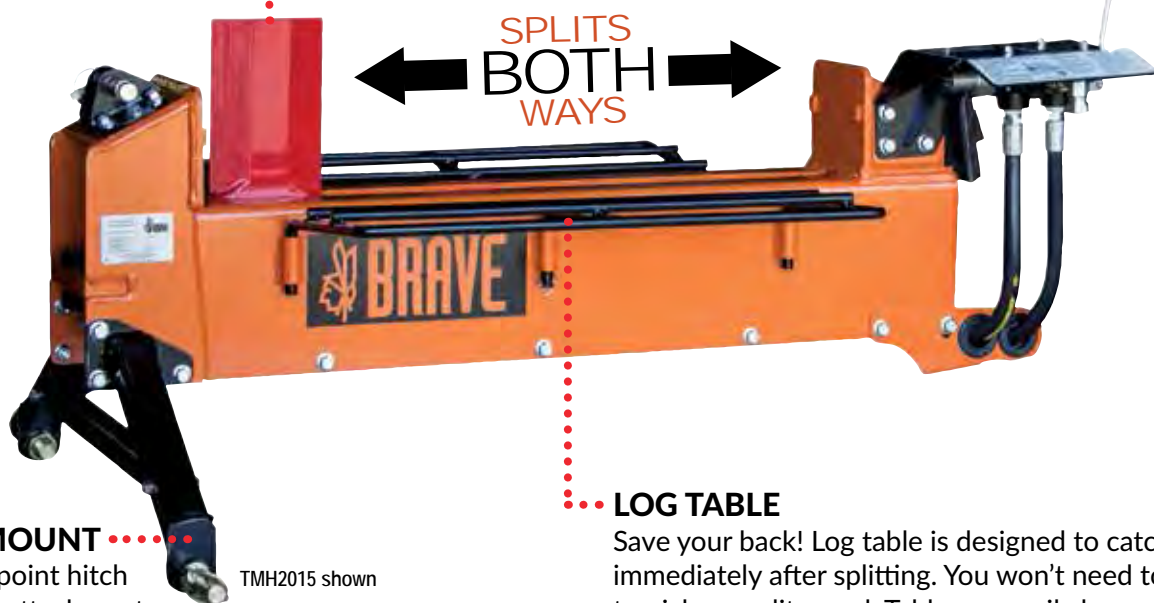





# LOG TABLE

STANDARD



**CONNECTS TO  
CATEGORY 1  
TRACTOR  
3-POINT  
HITCH**

# 2X FASTER

with dual action  
wedge you'll cut your  
splitting time in half

**TMH1315**

**13\*  
TON**



**TMH2015**

**20\*  
TON**



| Operation            | Horizontal                     |
|----------------------|--------------------------------|
| Splitting Force      | Up to 13 Tons*                 |
| Cords Per Season     | 2-100                          |
| Engine Brand         | N/A                            |
| Engine Starter       | N/A                            |
| Engine CC            | N/A                            |
| Max. Log Length      | 19"                            |
| Max. Log Diameter    | 12"                            |
| Wedge Material/Size  | 6" Carbon Steel (2-Way)        |
| Auto Return          | No                             |
| Hydraulic Capacity** | 1.5 Gallons (Cylinder & Hoses) |
| Cycle Time           | 10 Seconds @ 3 GPM             |
| Cylinder Diameter    | 3"                             |
| Cylinder Length      | 18"                            |
| Fenders              | No                             |
| Max. Towing Speed    | N/A                            |
| Log Cradle           | Included                       |
| Weight               | 143 lbs                        |
| Bed Height           | Tractor Dependent              |
| Dimensions (LxWxH)   | 43" x 34" x 20"                |
| Consumer Warranty    | 2 Year Limited                 |
| Commercial Warranty  | 1 Year Limited                 |

\*Dependent on tractor's hydraulic pressure.  
\*\*Hydraulic hoses are not included.

| Operation            | Horizontal                   |
|----------------------|------------------------------|
| Splitting Force      | Up to 20 Tons*               |
| Cords Per Season     | 2-100                        |
| Engine Brand         | N/A                          |
| Engine Starter       | N/A                          |
| Engine CC            | N/A                          |
| Max. Log Length      | 25"                          |
| Max. Log Diameter    | 16"                          |
| Wedge Material/Size  | 8" Carbon Steel (2-Way)      |
| Auto Return          | No                           |
| Hydraulic Capacity** | 2 Gallons (Cylinder & Hoses) |
| Cycle Time           | 7 Seconds @ 11 GPM           |
| Cylinder Diameter    | 4"                           |
| Cylinder Length      | 24"                          |
| Fenders              | No                           |
| Max. Towing Speed    | N/A                          |
| Log Cradle           | Included                     |
| Weight               | 293 lbs                      |
| Bed Height           | Tractor Dependent            |
| Dimensions (LxWxH)   | 46" x 34" x 22"              |
| Consumer Warranty    | 2 Year Limited               |
| Commercial Warranty  | 1 Year Limited               |

\*Dependent on tractor's hydraulic pressure.  
\*\*Hydraulic hoses are not included.



# TRENCHER



## EASY OPERATION

Simplified operator controls make the trencher more user-friendly and less intimidating.

## HONDA POWERED

Honda engine for powerful and reliable performance.

## RATCHET MECHANISM

A ratchet mechanism on the wheels helps prevent the machine from pulling away from the trenching direction.

## LIFT HANDLES

Built-in lift handles make transport easy.

## POWDER COATED STEEL

Powder coated steel, tapered roller bearings and double-row ball bearings for trouble-free service.


## COMPACT DESIGN

Narrow, compact design allows easy access around the job site and enables it to easily fit through gates and doorways.



## RATCHET MECHANISM ON WHEELS

PREVENTS TRENCHER FROM PULLING AWAY FROM THE TRENCHING DIRECTION

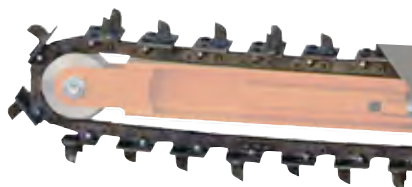

## STEEL FRAME & SOLID ROLLER DIGGING CHAIN

FOR DURABILITY AND INCREASED LIFE

## TRENCH ANYWHERE

WITH NARROW DESIGN THAT ALLOWS YOU TO GET CLOSE TO WALLS AND FENCES

BRPT



18  
INCH




|                     |                            |
|---------------------|----------------------------|
| Trencher Type       | Chain                      |
| Engine Brand        | Honda GX160                |
| Engine Starter      | Recoil                     |
| Engine CC           | 163                        |
| Self-Propelled      | No                         |
| Max. Trench Depth   | 18"                        |
| Max. Trench Width   | 3"                         |
| Max. Chain Speed    | 180' / Minute              |
| Chain Type          | Carbide Tipped Shark Teeth |
| Self-Propelled      | No                         |
| Clutch              | Centrifugal                |
| Operation           | 3 Handlebar Positions      |
| Lift Handles        | Yes                        |
| Weight              | 230 lbs                    |
| Dimensions (LxWxH)  | 60" x 24" x 41"            |
| Trencher Carrier    | Optional                   |
| Consumer Warranty   | 2 Year Limited             |
| Commercial Warranty | 1 Year Limited             |

## OPTIONAL TRENCHER CARRIER

USE ON ANY VEHICLE EQUIPPED WITH A CLASS 3 OR BETTER RECEIVER

Item # BRTC2

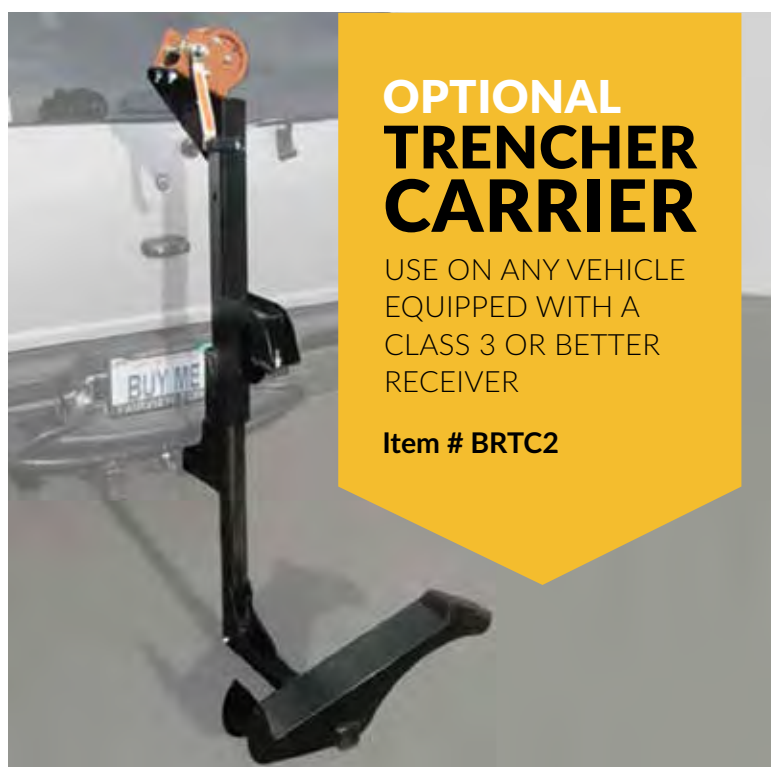

**Know what's below.  
Call before you dig.**



# EARTH AUGERS

## • TWIST GRIP THROTTLE

Easy to use twist grip throttle control for simple one person operation.

## • COMFORT-ZONE® HANDLE

Comfort-Zone® composite operator handle design helps maximize operator strength while reducing the effects of kickback and body fatigue.



## ALL METAL CENTRIFUGAL CLUTCH

Clutch slips on overload or when striking buried objects.

BRP240HHD shown

## • HONDA POWERED

Honda engine for powerful and reliable performance.

## • COMFORT-FLEX® HANDLES

Comfort-Flex® composite operator handles flex under load to help absorb vibration and shock.



BRP330HHD shown



# AUGER BITS & ACCESSORIES

AVAILABLE IN A VARIETY  
OF SIZES AND FOR  
VARIOUS DRIVESHAFT  
CONNECTIONS



## COMFORT-ZONE® OR -FLEX® HANDLES

FLEX UNDER LOAD TO HELP ABSORB  
VIBRATION AND KICKBACK FORCES FOR  
LESS FATIGUE AND ENHANCED SAFETY

# CE

## CERTIFIED

(EUROPEAN CONFORMITY)

**BRP240HHD**



**1  
PERSON**



Bits sold separately

|                             |  |
|-----------------------------|--|
| <b>Number of Operators</b>  | 1 Person                                   |
| <b>Engine Brand</b>         | Honda GX35                                 |
| <b>Engine Starter</b>       | Recoil                                     |
| <b>Engine CC</b>            | 35   |
| <b>Transmission</b>         | Enclosed, Spur Geared,<br>Double Reduction |
| <b>Rotation Speed</b>       | 166 RPM (No Load)                          |
| <b>Capacity</b>             | 2" to 8" Diameter                          |
| <b>Digging Length</b>       | 30"  |
| <b>Auger Extension</b>      | 15" Plain Tube Type                        |
| <b>Clutch</b>               | All-Metal<br>Automatic-Centrifugal         |
| <b>Drive Connection</b>     | 1" Round                                   |
| <b>Max. Drilling Torque</b> | 55 ft lbs                                  |
| <b>Throttle Control</b>     | Twist Grip                                 |
| <b>Operator Handle</b>      | Comfort-Zone®                              |
| <b>Reduction Ratio</b>      | 42.5 to 1                                  |
| <b>Weight (Less Auger)</b>  | 27 lbs                                     |
| <b>Consumer Warranty</b>    | 2 Year Limited                             |
| <b>Commercial Warranty</b>  | 1 Year Limited                             |

**BRP330HHD / BRP343HHD**



**2  
PERSON**



Bits sold separately

|                             |   |
|-----------------------------|---|
| <b>Number of Operators</b>  | 2 Person  |
| <b>Engine Brand</b>         | Honda GXV160                                    |
| <b>Engine Starter</b>       | Recoil  |
| <b>Engine CC</b>            | 163   |
| <b>Transmission</b>         | Enclosed, Spur Geared,<br>Double Reduction      |
| <b>Rotation Speed</b>       | 144 RPM (No Load)                               |
| <b>Capacity</b>             | 2" to 18" Diameter                              |
| <b>Digging Length</b>       | 36"   |
| <b>Auger Extension</b>      | 15" Plain Tube Type,<br>36" Continuous Flighted |
| <b>Clutch</b>               | All-Metal<br>Automatic-Centrifugal              |
| <b>Drive Connection</b>     | 1-3/8" Hexagon / 7/8" Square                    |
| <b>Max. Drilling Torque</b> | 190 ft lbs                                      |
| <b>Throttle Control</b>     | Twist Grip                                      |
| <b>Operator Handle</b>      | Comfort-Flex®                                   |
| <b>Reduction Ratio</b>      | 25 to 1   |
| <b>Weight (Less Auger)</b>  | 71 lbs  |
| <b>Consumer Warranty</b>    | 2 Year Limited                                  |
| <b>Commercial Warranty</b>  | 1 Year Limited                                  |



1



2



3



4

BR10594  
shown

5



6



BR10609



BR10611

BR10612

7



## EARTH AUGER ACCESSORIES

### 1. Round Bits

| Item #  | Diameter | Length |
|---------|----------|--------|
| BR10580 | 2"       | 30"    |
| BR10581 | 3"       | 30"    |
| BR10582 | 4"       | 30"    |
| BR10583 | 6"       | 30"    |
| BR10584 | 8"       | 30"    |

### 2. Hexagon Bits

| Item #  | Diameter | Length |
|---------|----------|--------|
| BR10586 | 4"       | 36"    |
| BR10587 | 6"       | 36"    |
| BR10588 | 8"       | 36"    |
| BR10590 | 12"      | 36"    |
| BR10591 | 14"      | 36"    |
| BR10592 | 16"      | 36"    |
| BR10593 | 18"      | 36"    |

### 3. Square Bits

| Item #  | Diameter | Length |
|---------|----------|--------|
| BR10595 | 4"       | 36"    |
| BR10596 | 6"       | 36"    |
| BR10597 | 8"       | 36"    |
| BR10598 | 10"      | 36"    |
| BR10599 | 12"      | 36"    |
| BR10600 | 14"      | 36"    |
| BR10601 | 16"      | 36"    |
| BR10602 | 18"      | 36"    |

### 4. Bit Extensions

| Item #  | Type    | Length |
|---------|---------|--------|
| BR10585 | Round   | 15"    |
| BR10594 | Hexagon | 15"    |
| BR10603 | Square  | 15"    |

### 5. Blades

| Item #  | Type       | Diameter |
|---------|------------|----------|
| BR10604 | Knife-Edge | 4"       |
| BR10605 | Knife-Edge | 6"       |
| BR10606 | Knife-Edge | 8"       |
| BR10607 | Knife-Edge | 10"      |
| BR10608 | Knife-Edge | 12"      |

### 6. Screw Bits

| Item #  | Type                                       |
|---------|--|
| BR10609 | Fits BRP240HHD (except 2" and 3" diameter) |
| BR10611 | Fits BRP330HHD & BRP343HHD                 |
| BR10612 | Fits BRP330HHD                             |

### 7. Teeth

| Item #  | Type           |
|---------|----------------|
| BR10610 | Hardfaced Dirt |





# COLD WATER PRESSURE WASHERS

**Pressure Washer  
Accessories Available**  
See page 23.

## INDUSTRIAL/CONSUMER SPRAY GUN

Rear-entry gun has 3' lance for better control and reach.

## HIGH PRESSURE HOSE

Durable 25' or 50' non-marking rubber hose resists wear.

## POWDER COATED PUSH-DOWN CART

Two-wheel, 12-gauge powder coated steel cart provides more balanced maneuvering.

## QUICK CONNECT NOZZLES

Nozzle changes are easy with our color-coded, quick connecting nozzles.

## HONDA POWERED

Reliable Honda engine features low oil shutdown.

\*Except BR1517ECO

## TIRES

Long lasting 10" pneumatic turf tires make for smoother transport.



BRP2530HCA shown



# CLEANS DIRT

VEHICLE & WATERCRAFT  
DETAILING, DRIVEWAYS,  
SIDEWALKS, SIDING,  
DECKS, LAWN EQUIPMENT



## ADJUSTABLE PRESSURE WANDS

# QUICK CONNECT



## NOZZLES

BR1517ECO

**1700**  
PSI



BR2528HCO



**2800**  
PSI



|                        |                              |
|------------------------|------------------------------|
| PSI                    | 1700                         |
| Engine Brand           | N/A                          |
| Motor                  | 120-Volt, 15 Amp, Electric   |
| HP                     | 1.5                          |
| Pump Type              | Comet BXD                    |
| Pump Flow              | 1.5 GPM                      |
| Frame Type             | 2-Wheel Cart                 |
| Max. Temperature       | 140° F                       |
| Connections            | Quick-Connect                |
| Hose Diameter          | 3/8"                         |
| Hose Length            | 25'                          |
| Spray Nozzle Size      | 2.0                          |
| Spray Nozzle Tips      | 15°/Soap                     |
| Burner Fuel Tank Size  | N/A                          |
| Adjustable Pressure    | Yes                          |
| Chemical Injector      | Yes                          |
| Battery (not included) | Requires 36' GFCI Power Cord |
| Weight                 | 95 lbs                       |
| Dimensions (LxWxH)     | 34" X 21" X 38"              |
| Consumer Warranty      | 2 Year Limited               |
| Commercial Warranty    | 1 Year Limited               |

|                       |                 |
|-----------------------|-----------------|
| PSI                   | 2800            |
| Engine Brand          | Honda GC160     |
| Engine Starter        | Recoil          |
| Engine CC             | 160             |
| Pump Type             | Comet VRX       |
| Pump Flow             | 2.5 GPM         |
| Frame Type            | 2-Wheel Cart    |
| Max. Temperature      | 140° F          |
| Connections           | Quick-Connect   |
| Hose Diameter         | 3/8"            |
| Hose Length           | 25'             |
| Spray Nozzle Size     | 3.0             |
| Spray Nozzle Tips     | 25°/Soap        |
| Burner Fuel Tank Size | N/A             |
| Adjustable Pressure   | Yes             |
| Chemical Injector     | Yes             |
| Battery               | N/A             |
| Weight                | 77 lbs          |
| Dimensions (LxWxH)    | 34" X 21" X 38" |
| Consumer Warranty     | 2 Year Limited  |
| Commercial Warranty   | 1 Year Limited  |



## NON-MARKING HOSES



## CHEMICAL INJECTION SYSTEM



ALLOWS FOR THE USE  
OF CLEANERS AND OTHER  
CHEMICALS DESIGNED  
FOR PRESSURE WASHERS  
THROUGH SIPHONING TUBE



**ON BOARD  
NOZZLE  
STORAGE**  
FOR EASY ACCESS

BR2530HCO

**3000  
PSI**



BRP2530HCA



**3000  
PSI**



|                       |                 |
|-----------------------|-----------------|
| PSI                   | 3000            |
| Engine Brand          | Honda GC190     |
| Engine Starter        | Recoil          |
| Engine CC             | 187             |
| Pump Type             | Comet AXD       |
| Pump Flow             | 2.5 GPM         |
| Frame Type            | 2-Wheel Cart    |
| Max. Temperature      | 140° F          |
| Connections           | Quick-Connect   |
| Hose Diameter         | 3/8"            |
| Hose Length           | 25'             |
| Spray Nozzle Size     | 3.0             |
| Spray Nozzle Tips     | 25°/Soap        |
| Burner Fuel Tank Size | N/A             |
| Adjustable Pressure   | Yes             |
| Chemical Injector     | Yes             |
| Battery               | N/A             |
| Weight                | 83 lbs          |
| Dimensions (LxWxH)    | 34" X 21" X 38" |
| Consumer Warranty     | 2 Year Limited  |
| Commercial Warranty   | 1 Year Limited  |

|                       |                     |
|-----------------------|---------------------|
| PSI                   | 3000                |
| Engine Brand          | Honda GX160         |
| Engine Starter        | Recoil              |
| Engine CC             | 163                 |
| Pump Type             | Cat 4DNX            |
| Pump Flow             | 2.5 GPM             |
| Frame Type            | 2-Wheel Cart        |
| Max. Temperature      | 140° F              |
| Connections           | Quick-Connect       |
| Hose Diameter         | 3/8"                |
| Hose Length           | 50'                 |
| Spray Nozzle Size     | 3.0                 |
| Spray Nozzle Tips     | 0°/15°/25°/40°/Soap |
| Burner Fuel Tank Size | N/A                 |
| Adjustable Pressure   | Yes                 |
| Chemical Injector     | Yes                 |
| Battery               | N/A                 |
| Weight                | 96 lbs              |
| Dimensions (LxWxH)    | 34" X 21" X 38"     |
| Consumer Warranty     | 2 Year Limited      |
| Commercial Warranty   | 1 Year Limited      |

# CLEANS DIRT

VEHICLE & WATERCRAFT  
DETAILING, DRIVEWAYS,  
SIDEWALKS, SIDING,  
DECKS, LAWN EQUIPMENT



## ADJUSTABLE PRESSURE WANDS

# QUICK CONNECT



## NOZZLES

BRP3033HCA

**3300**  
PSI



BRP3540HCA

**4000**  
PSI



|                       |                     |
|-----------------------|---------------------|
| PSI                   | 3300                |
| Engine Brand          | Honda GX270         |
| Engine Starter        | Recoil              |
| Engine CC             | 270                 |
| Pump Type             | Cat 4SPX            |
| Pump Flow             | 3.0 GPM             |
| Frame Type            | 2-Wheel Cart        |
| Max. Temperature      | 140° F              |
| Connections           | Quick-Connect       |
| Hose Diameter         | 3/8"                |
| Hose Length           | 50'                 |
| Spray Nozzle Size     | 3.5                 |
| Spray Nozzle Tips     | 0°/15°/25°/40°/Soap |
| Burner Fuel Tank Size | N/A                 |
| Adjustable Pressure   | Yes                 |
| Chemical Injector     | Yes                 |
| Battery               | N/A                 |
| Weight                | 123 lbs             |
| Dimensions (LxWxH)    | 34" X 21" X 38"     |
| Consumer Warranty     | 2 Year Limited      |
| Commercial Warranty   | 1 Year Limited      |

|                       |                     |
|-----------------------|---------------------|
| PSI                   | 4000                |
| Engine Brand          | Honda GX390         |
| Engine Starter        | Recoil              |
| Engine CC             | 389                 |
| Pump Type             | Cat 66DX            |
| Pump Flow             | 3.5 GPM             |
| Frame Type            | 2-Wheel Cart        |
| Max. Temperature      | 140° F              |
| Connections           | Quick-Connect       |
| Hose Diameter         | 3/8"                |
| Hose Length           | 50'                 |
| Spray Nozzle Size     | 3.5                 |
| Spray Nozzle Tips     | 0°/15°/25°/40°/Soap |
| Burner Fuel Tank Size | N/A                 |
| Adjustable Pressure   | Yes                 |
| Chemical Injector     | Yes                 |
| Battery               | N/A                 |
| Weight                | 147 lbs             |
| Dimensions (LxWxH)    | 34" X 21" X 38"     |
| Consumer Warranty     | 2 Year Limited      |
| Commercial Warranty   | 1 Year Limited      |





# HOT WATER PRESSURE WASHERS

**Pressure Washer  
Accessories Available**  
See page 23.



## QUICK CONNECT NOZZLES

Nozzle changes are easy with our color-coded, quick connecting nozzles.

## HIGH PRESSURE HOSE

Durable 25' or 50' non-marking rubber hose resists wear.

## BURNER

Burner with thermostat control for temperatures up to 250° and reliable performance.



## POWDER COATED STEEL CART

10-gauge steel tube frame for durability

## INDUSTRIAL SPRAY GUN

Rear-entry gun has 3' lance for better control and reach.

## TIRES

Large, sturdy 12" (BRP1520ECA) or 14" (BRP4030HCA) pneumatic tires make for smoother transport.

# CLEANS GREASE & GRIME



# CHEMICAL INJECTION SYSTEM

ALLOWS FOR THE USE  
OF CLEANERS AND OTHER  
CHEMICALS DESIGNED  
FOR PRESSURE WASHERS  
THROUGH SIPHONING TUBE



# ON BOARD NOZZLE STORAGE

KEEPS HOSE AND SPRAY  
GUN CLOSE AT HAND

BRP1520ECA



2000  
PSI



BRP4030HCA



3000  
PSI



|                        |  |
|------------------------|--|
| PSI                    | 2000                                     |
| Engine Brand           | N/A                                      |
| Motor                  | 115-Volt, 20 Amp, Electric               |
| HP                     | 2.0                                      |
| Pump Type              | N/A                                      |
| Pump Flow              | 1.5 GPM                                  |
| Frame Type             | 2-Wheel, Steel Cart                      |
| Max. Temperature       | 250° F                                   |
| Connections            | Quick-Connect                            |
| Hose Diameter          | 3/8"                                     |
| Hose Length            | 50'                                      |
| Spray Nozzle Size      | 2.0                                      |
| Spray Nozzle Tips      | 0°/15°/25°/40°/Soap/Steam                |
| Burner Fuel Tank Size  | 8.25 gallon                              |
| Adjustable Pressure    | Yes                                      |
| Chemical Injector      | Yes                                      |
| Battery (not included) | Requires dedicated NEMA 5-20R Receptacle |
| Weight                 | 385 lbs                                  |
| Dimensions (LxWxH)     | 38" X 26" X 43"                          |
| Consumer Warranty      | 2 Year Limited                           |
| Commercial Warranty    | 1 Year Limited                           |

|                        |   |
|------------------------|---|
| PSI                    | 3000  |
| Engine Brand           | Honda GX390                                 |
| Engine Starter         | Electric Start                              |
| Engine CC              | 389cc                                       |
| Pump Type              | CAT 66DX                                    |
| Pump Flow              | 4.0 GPM                                     |
| Frame Type             | 4-Wheel, Steel Cart                         |
| Max. Temperature       | 250° F                                      |
| Connections            | Quick-Connect                               |
| Hose Diameter          | 3/8"  |
| Hose Length            | 50'   |
| Spray Nozzle Size      | 4.5 (Steam 3.5)                             |
| Spray Nozzle Tips      | 0°/15°/25°/40°/Soap/Steam                   |
| Burner Fuel Tank Size  | 8.75 gallon                                 |
| Adjustable Pressure    | Yes   |
| Chemical Injector      | Yes   |
| Battery (not included) | 12-Volt, 18+ Amp/Hour Lawn & Garden Battery |
| Weight                 | 557 lbs                                     |
| Dimensions (LxWxH)     | 64" x 33" x 44"                             |
| Consumer Warranty      | 2 Year Limited                              |
| Commercial Warranty    | 1 Year Limited                              |





**#3.0 Turbo Nozzle**  
Item # NYR36K30.DOS\*



**Telescoping Wand, Fiberglass**  
Item # DCLTG24.DOS



**Surface Cleaner (20")**  
Item # DCFSCP20.DOS



**#3.0 Spray Nozzle (5-Pack)**  
Item # 38531.DOS

## PRESSURE WASHER ACCESSORIES

### Nozzles, 0°

| Item #      | Nozzle Size |
|-------------|-------------|
| 900020Q.DOS | #2.0        |
| 900030Q.DOS | #3.0        |
| 900035Q.DOS | #3.5        |
| 782122.DOS  | #4.5        |

### Nozzles, 15°

| Item #      | Nozzle Size |
|-------------|-------------|
| 915020Q.DOS | #2.0        |
| 915030Q.DOS | #3.0        |
| 778945.DOS  | #3.5        |
| 782120.DOS  | #4.5        |

### Nozzles, 25°

| Item #      | Nozzle Size |
|-------------|-------------|
| 925020Q.DOS | #2.0        |
| 925030Q.DOS | #3.0        |
| 925035Q.DOS | #3.5        |
| 777844.DOS  | #4.5        |

### Nozzles, 40°

| Item #      | Nozzle Size |
|-------------|-------------|
| 940020Q.DOS | #2.0        |
| 940030Q.DOS | #3.0        |
| 940035Q.DOS | #3.5        |
| 778737.DOS  | #4.5        |

### Additional Nozzles

| Item #        | Description  |
|---------------|--|
| NYR36K30.DOS* | #3.0 Turbo Nozzle                                    |
| 778949.DOS    | #4.0 Spray Nozzle, 65°                               |
| 778150.DOS    | #2.0 Spray Nozzle, 15° & 65° (2-Pack)                |
| 38530.DOS     | #3.0 Spray Nozzle, 25° & 65° (2-Pack)                |
| 778197.DOS    | #2.0 Spray Nozzle, 0°, 15°, 25°, 40° & Soap (5-Pack) |
| 38531.DOS     | #3.0 Spray Nozzle, 0°, 15°, 25°, 40° & Soap (5-Pack) |
| 38532.DOS     | #3.5 Spray Nozzle, 0°, 15°, 25°, 40° & Soap (5-Pack) |

\*Not recommended for use on wood or painted surfaces.

### Spray Guns/Lances/Wands

| Item #        | Description  |
|---------------|--|
| 38526.DOS     | Spray Gun, M22 Coupler Out / M22-M Coupler In      |
| 38527.DOS     | Gun/Lance Combo, M22 Coupler Out / 3/8" NPT-M In   |
| 779165.DOS    | Gun/Lance Combo, 22mm Coupler Out / 3/8" QC In     |
| 791309.DOS    | Chrome Lance, 18.5", 15° Bend                      |
| 791278.DOS    | Chrome Lance, 18.5", 15° Bend w/ Insulated Coupler |
| DCLTG24.DOS   | Telescoping Wand, 24' Fiberglass                   |
| DCLTG24A4.DOS | Telescoping Wand, 24' Aluminum                     |
| ND20015.DOS   | Telescoping Wand Belt                              |

### Hoses & Hose Accessories

| Item #        | Description              |
|---------------|--------------------------|
| 38524.DOS     | Non-Marking Hose, 25'    |
| 38525.DOS     | Non-Marking Hose, 50'    |
| 780841.DOS    | Black Pressure Hose, 25' |
| DHR50100D.DOS | Hose Reel, 3/8" x 100'   |

### Attachments & Accessories

| Item #       | Description                                    |
|--------------|--|
| D20011.DOS   | Gutter Cleaner, 12"                            |
| 791691.DOS   | Inline Mag Flowswitch, 3/8" Female NPT, 12 GPM |
| DCFSCP20.DOS | Surface Cleaner, 20"                           |
| 790561.DOS   | Thermostat, 70° - 250° w/ Control Knob         |
| 100868.DOS   | Water Broom w/ 36" Lance                       |

### Couplers, Nipples, Filters & O-Rings

| Item #      | Description                                   |
|-------------|---|
| 778236.DOS  | Brass Coupler, 22 mm w/ Female NPT            |
| 22321.DOS   | Brass Nipple w/ Male NPT                      |
| 35169.DOS   | Inlet Filter, 1/2" NPT-M                      |
| 38596.DOS   | Inlet Filter, 3/8" NPT-M                      |
| N100040.DOS | O-Ring Kit                                    |
| D10052.DOS  | Pipe Nipple, 3/8", Union                      |
| 777915.DOS  | Quick Coupler, 3/8" w/ Female Inlet           |
| 777913.DOS  | Quick Coupler, 3/8" w/ Male Inlet             |
| 777914.DOS  | Quick Coupler, Brass w/ Female NPT            |
| 780455.DOS  | Quick Coupler, Brass w/ Male NPT              |
| D10037.DOS  | Quick Coupler, 22 mm                          |
| 221008.DOS  | Quick Coupler, 22 mm w/ Male Fitting          |
| D10010.DOS  | Quick Coupler, Brass                          |
| 777904.DOS  | Quick Coupler, Brass w/ Female NPT            |
| 791274.DOS  | Quick Coupler, Brass w/ Female NPT, Insulated |



**2000  
WATT**

### BRI2000I

|                                |                                       |
|--------------------------------|---------------------------------------|
| Voltage                        | 120V AC / 12V DC                      |
| AC Output                      | 2000 Watt (Surge) / 1600 Watt (Rated) |
| Max. AC Amperage / AC Cycle    | 18 Amps / 60 Hz                       |
| AC Overload                    | Yes                                   |
| 12V 8.3 Amp DC Receptacle      | 1 Each (T-Type)                       |
| 120V 20 Amp AC Receptacle      | 2 Each w/ Ground                      |
| 120V 30 Amp AC Receptacle      | N/A                                   |
| 120V 30 Amp 3-Prong Twist Lock | N/A                                   |
| USB Port                       | Yes (1)                               |
| Auto Idle Feature              | Power On Demand                       |
| Exhaust Spark Arrestor         | Yes                                   |
| Parallel "Duo-Power" Ready     | N/A                                   |
| Engine Brand                   | FME 152                               |
| Engine Starter                 | Recoil                                |
| Engine Displacement            | 105 cc                                |
| Fuel Tank Capacity             | 0.92 Gallons                          |
| Electronic Fuel Injected       | Yes                                   |
| Low Oil Shutdown Protection    | Yes                                   |
| Run Time (@ 50% Load)          | 3 Hours                               |
| Sound Level (@ 23 ft)          | 60 db                                 |
| Battery Charger/Maintainer     | N/A                                   |
| 12 V Cord, Plug & Clips        | Included (1 Each)                     |
| Mobility/Wheel Kit             | N/A                                   |
| Weight                         | 60 lbs                                |
| Dimensions (LxWxH)             | 23" x 15" x 22"                       |
| Consumer Warranty              | 1 Year Limited                        |
| Commercial Warranty            | 1 Year Limited                        |



**3200  
WATT**

### BRI3200IER

|                                |   |
|--------------------------------|---|
| Voltage                        | 120V AC / 12V DC                            |
| AC Output                      | 3200 Watt (Surge) / 3100 Watt (Rated)       |
| Max. AC Amperage / AC Cycle    | 22 Amps / 60 Hz                             |
| AC Overload                    | Yes   |
| 12V 8.3 Amp DC Receptacle      | 1 Each (T-Type)                             |
| 120V 20 Amp AC Receptacle      | 2 Each w/ Ground                            |
| 120V 30 Amp RV Receptacle      | N/A   |
| 120V 30 Amp 3-Prong Twist Lock | N/A   |
| USB Port                       | Yes (1)                                     |
| Auto Idle Feature              | Power On Demand                             |
| Exhaust Spark Arrestor         | Yes   |
| Parallel "Duo-Power" Ready     | Yes   |
| Engine Brand                   | FME 168                                     |
| Engine Starter                 | Electric<br>(Remote Start Key Fob Included) |
| Engine Displacement            | 150 cc                                      |
| Fuel Tank Capacity             | 2 Gallons                                   |
| Electronic Fuel Injected       | Yes   |
| Low Oil Shutdown Protection    | Yes   |
| Run Time (@ 50% Load)          | 5 Hours                                     |
| Sound Level (@ 23 ft)          | 61 db                                       |
| Battery Charger/Maintainer     | N/A   |
| 12 V Cord, Plug & Clips        | Included (1 Each)                           |
| Mobility/Wheel Kit             | Suitcase Style                              |
| Weight                         | 75 lbs                                      |
| Dimensions (LxWxH)             | 20" x 13" x 23"                             |
| Consumer Warranty              | 1 Year Limited                              |
| Commercial Warranty            | 1 Year Limited                              |



# GENERATORS

## ① Super Quiet

With sound levels of just 57-61 dB, these generators are as quiet as normal conversation.

## ② Sine Wave Distortion Under 2%

Sine wave distortion is less than 2% making this ideal for powering sensitive electronics including laptops, computers, televisions, surround sound systems, video game consoles, sensitive tools and cell phone chargers.

## ③ Remote Start

Operate with remote start using included key fob (excludes BRI2000I).

## ④ Electronically Fuel Injected Inverter

EFI generators allow for very low noise and emissions while delivering hours of run time on just one tank of gas (excludes BRI2000I).

## ⑤ Parallel Cables

Parallel cables allow for more power.

## ⑥ Convenient Transport

Four lock down casters and handle are included for easy of transport and mobility (BRI4100IER and BRI7000IER only)



# 4100 WATT

### BRI4100IER

|                                |   |
|--------------------------------|---|
| Voltage                        | 120V AC / 12V DC                            |
| AC Output                      | 4100 Watt (Surge) / 3800 Watt (Rated)       |
| Max. AC Amperage / AC Cycle    | 30 Amps / 60 Hz                             |
| AC Overload                    | Yes   |
| 12V 8.3 Amp DC Receptacle      | 1 Each (T-Type)                             |
| 120V 20 Amp AC Receptacle      | 2 Each w/ Ground                            |
| 120V 30 Amp RV Receptacle      | 1 Each                                      |
| 120V 30 Amp 3-Prong Twist Lock | 1 Each                                      |
| USB Port                       | N/A   |
| Auto Idle Feature              | Power On Demand                             |
| Exhaust Spark Arrestor         | Yes   |
| Parallel "Duo-Power" Ready     | N/A   |
| Engine Brand                   | FME 177                                     |
| Engine Starter                 | Electric<br>(Remote Start Key Fob Included) |
| Engine Displacement            | 270 cc                                      |
| Fuel Tank Capacity             | 3.5 Gallons                                 |
| Electronic Fuel Injected       | Yes   |
| Low Oil Shutdown Protection    | Yes   |
| Run Time (@ 50% Load)          | 4 Hours                                     |
| Sound Level (@ 23 ft)          | 57 db                                       |
| Battery Charger/Maintainer     | Included                                    |
| 12 V Cord, Plug & Clips        | Included (1 Each)                           |
| Mobility/Wheel Kit             | 4 Lock Down Casters                         |
| Weight                         | 112.5 lbs                                   |
| Dimensions (LxWxH)             | 23.5" x 18.5" x 20.5"                       |
| Consumer Warranty              | 1 Year Limited                              |
| Commercial Warranty            | 1 Year Limited                              |



# 7000 WATT

### BRI7000IER

|                                |   |
|--------------------------------|---|
| Voltage                        | 120V AC / 12V DC                            |
| AC Output                      | 7000 Watt (Surge) / 6500 Watt (Rated)       |
| Max. AC Amperage / AC Cycle    | 48 Amps / 60 Hz                             |
| AC Overload                    | Yes   |
| 12V 8.3 Amp DC Receptacle      | 1 Each (T-Type)                             |
| 120V 20 Amp AC Receptacle      | 2 Each w/ Ground                            |
| 120V 30 Amp RV Receptacle      | 1 Each                                      |
| 120V 30 Amp 3-Prong Twist Lock | 1 Each                                      |
| USB Port                       | Yes (1)                                     |
| Auto Idle Feature              | Power On Demand                             |
| Exhaust Spark Arrestor         | Yes   |
| Parallel "Duo-Power" Ready     | N/A   |
| Engine Brand                   | FME 188                                     |
| Engine Starter                 | Electric<br>(Remote Start Key Fob Included) |
| Engine Displacement            | 389 cc                                      |
| Fuel Tank Capacity             | 4.5 Gallons                                 |
| Electronic Fuel Injected       | Yes   |
| Low Oil Shutdown Protection    | Yes   |
| Run Time (@ 50% Load)          | 4 Hours                                     |
| Sound Level (@ 23 ft)          | 59 db                                       |
| Battery Charger/Maintainer     | Included                                    |
| 12 V Cord, Plug & Clips        | Included (1 Each)                           |
| Mobility/Wheel Kit             | 4 Lock Down Casters                         |
| Weight                         | 181 lbs                                     |
| Dimensions (LxWxH)             | 27" x 20" x 25"                             |
| Consumer Warranty              | 1 Year Limited                              |
| Commercial Warranty            | 1 Year Limited                              |



20195 S. Diamond Lake Rd., Suite 100  
Rogers, MN 55374

(800) 350-8739  
[www.braveproducts.com](http://www.braveproducts.com)



DEALER LABEL



EARTH AUGERS



LOG SPLITTERS



PRESSURE WASHERS



TRENCHERS

