

AHD 1080P License Plate Camera

- 1920x1080P@25/30fps (AHD)
- 1/2.9" Sony 2.1M, 2nd Generation Starvis (Darklight Level) Sensor
- Color: 0.1Lux@F1.4, White Light LEDs On: 0 Lux
- White LEDs On by Smart Detection
- White LEDs Light level Adjustable via OSD or CoC
- Programmable Self Defined Min. and Max Shutter Speed Range
- Smart DNR, 3D/2D DNR, Sense up, Fog Reduction
- True WDR up to 120db, D-WDR
- Support CoC/ UTC/ PELCO-D Multi-Coaxial Control Protocol
- Video Output: AHD or CVBS (Composite) via OSD Setting




Video	Image Sensor	1/2.9" Sony 2.1M STARVIS CMOS Sensor
	Video Frame Rate (Maximum)	1920x1080P@25/30fps
	Minimum Illumination	Color: 0.1Lux@F1.4, White Light LEDs On: 0 Lux
	Wide Dynamic Range	120dB
	Video Output	AHD or CVBS (Composite) via OSD Setting
Function	White Light LED; Working Distance	4pcs Hi-Power White Light LED ; 12 -18M
	OSD Menu	OSD Control / CoC (Via the coax)
	White Light LEDs	On, Auto Smart On & Off Programmable
	Auto Electronic Shutter	Auto Shutter: Programmable Self Defined Max and Min. Shutter Range.
	Manual Electronic Shutter	20 Steps, 1/25(30), 1/50(60), 1/100(120), 1/150(180), 1/200(240), 1/250, 1/300, 1/350, 1/400, 1/450, 1/500, 1/600, 1/750, 1/1000, 1/1500, 1/2000, 1/4000, 1/8000, 1/16,000, 1/30,000
	White Balance	ATW / AWB / PWB (Push Lock) / Manual
	WDR; BLC; HLC	High (Max 120dB) / Middle / Low / Off; Program; On / Off
	Fog Reduction	Auto / Manual / Off ; Level: High / Middle / Low
	Dynamic Noise Reduction	High / Middle / Low / Off
	Sense Up	On (x2, x4, x8, x16, x32) / Off
	Language	English, Japanese, Traditional Chinese, Simplified Chinese
	IR / White LED Switch	Night Time Normal: White Light LEDs Auto On Day Time: Auto Switching White Light by Smart Detection
	Image Setting	Sharpness / Mirror / Flip
	Privacy Zone Mask	16 Zones Programmable
	Motion Detection	On: Sensitivity, Programmable / Off
	Lens Adapter	Built-in Motorized Zoom Lens
	Lens / Working Distance	Standard f2.8-12mm/F1.4, Optional f7-22mm Motorized Zoom, Working Distance. f2.8-12mm: 2-8 Meter (6.5-26 Feet) f7.0-22mm: 5-18 Meter (16.5-60 Feet)
	Water Resistance	IP66
	Power Supply; Consumption	12Vdc@400mA (4.8W, Max)
	Operation; Storage Temp.	-10°C ~ 50°C; -20°C ~ 60°C
	Operation; Storage Humidity	Maximum: RH80%; RH90%
	Dimensions	85.5x 92.5 x 315 mm
	Net Weight	850g



Dimensions

Tol: ±0.5 Unit: mm

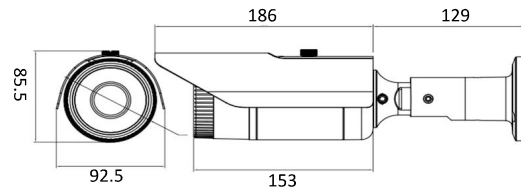

*Specifications are subject to change without notice. v08_17S1_180905