

Turbo air
AIR CONDITIONER MANUFACTURER

4184 E. Conant St.
Long Beach, CA 90808
Tel. 888-900-1002
Fax. 310-900-1088
www.turboairinc.net

Project :

Model # :

Item # :

Qty :


Approval :

Condensing Unit

Model : TS060XR404A3



≡ FEATURES / BENEFITS ≡

- Blue anti-corrosion-fin increases the life span of the coil.
- Seamless inner groove copper tube increases the heat exchange rate by reducing the space between the fin and copper tube.
- Highest quality compressor in the world.

- Head pressure control stabilizes the freezing of liquid line, minimizes formation of flash gas to increase efficiency of the system, and prevents compressor damage by controlling high pressure.
- Experienced engineers have designed the system for maximum efficiency.
- Fan Blades : Specifically matched with motors and coil for maximum air movement and cooling.
- Control box is designed for easy installation.
- Low pressure control is adjustable.
- All the parts are compliant with industry standards and interchangeable with readily available parts.
- Wiring : Easily accessible. Compressor comes with a wiring harness that is manufactured with connections that will not come loose with vibration.
- Control box and service valves are located outside for easy service.
- Base : Heavy duty steel. Legs are 2-1/6" tall
- Cabinet : Prepainted with galvanized body. Protects against corrosion.
- All products carry UL, cUL, ISO 9001 approvals.

Condensing Unit

Model : TS060XR404A3

PERFORMANCE CHART

	0°F(SST)	-10°F	-20°F	-25°F	-30°F	-35°F	-40°F
90°F(AMBIENT)	36360	30140	27160	24330	21680	19240	15100
95°F	34960	28970	26120	23390	20850	18500	14520
100°F	33560	27810	25080	22450	20010	17760	13950
110°F	30770	25490	20580	18340	16270	14520	12780

SPECIFICATION


Compressor	ZF18K4E-TF5
Line Size	1/2" Liquid 1-1/8" Suction
Receiver 90%	18
Fan Data	1 Fan (3760CFM)
Dimensions	30.28(D) x 38.5(W) x 27.28(H)
Net Weight	297 Lbs
Power Supply	208-230/3ph/60hz
Compressor Amp	23.9
MCA	32.1
MOPD	50

Design and specifications subject to change without notice

- Suction and discharge vibration eliminators with Discus compressors.
- Oil failure switch with Discus compressors.
- To prevent damage of compressor that resulted from liquid-compression, accumulator was installed in this units.
- To improve efficiency, installed oil separator
- **WARRANTY : 1 Year Compressor Warranty (4 Year extended warranty available)**
- **1 Year Fan Motor and Parts Warranty**

PLAN VIEW

(unit : inch)

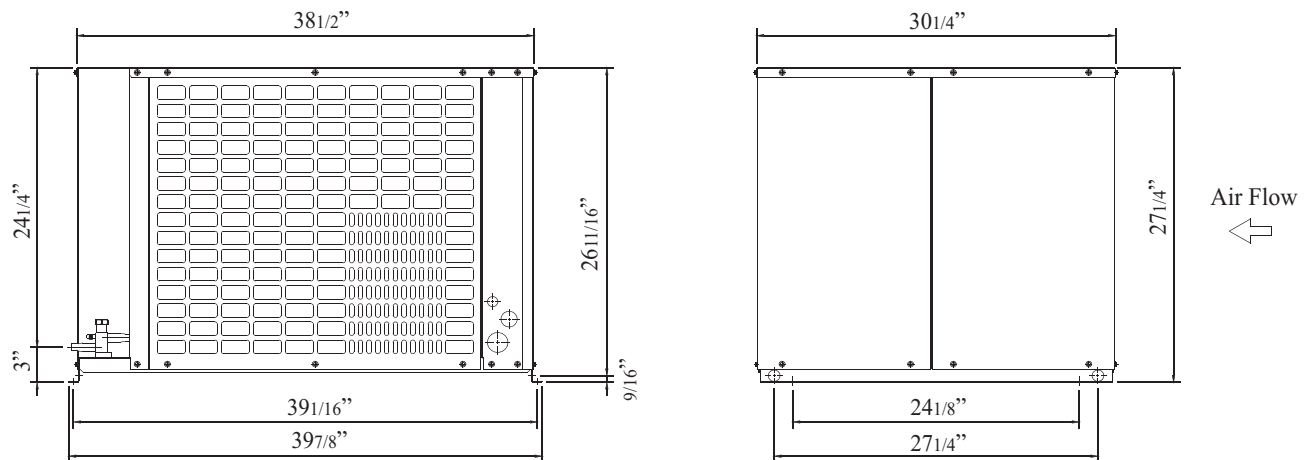

▪ Toll Free : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN KNIFE

RADIANCE

GREEN WORLD

AIR CONDITIONER MANUFACTURER
Turbo air