


METHOD 1 - WET MOUNT

(Recommended for 1st time vinyl installers)


These should be applied on the inside of the truck's or SUV's back window, NOT ON THE OUTSIDE!!!

Note: if you have a sliding rear window you will have to cut narrow sections out of the decal and apply it in 2-3 pieces depending on your window style.

1. Clean surface with lint free cloth.

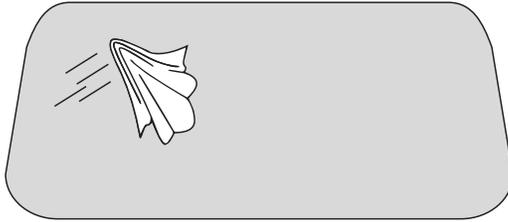


2. Remove Backing paper
(The backing paper is the opposite of the thin side which you can see the decal through)

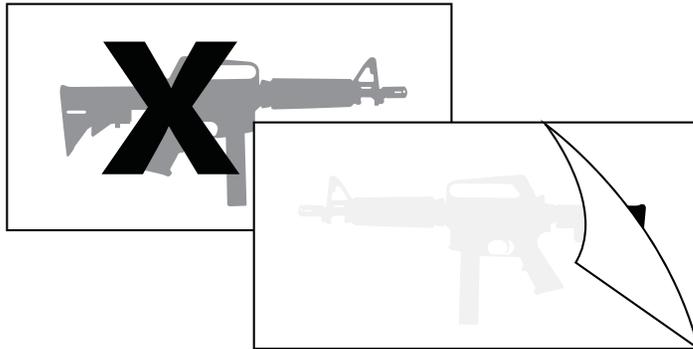

3. Spray to Soak Back of Decal and surrounding release paper (Immediately proceed to step 4)




4. While decal is dripping wet place on window and move to desired position. Using the edge of a credit card apply sweeping pressure to the entire sheet of release paper including decal making sure to work out all water and bubbles to the edge of the paper. Blot the entire sheet of paper and windshield with a dry towel removing remaining moisture.

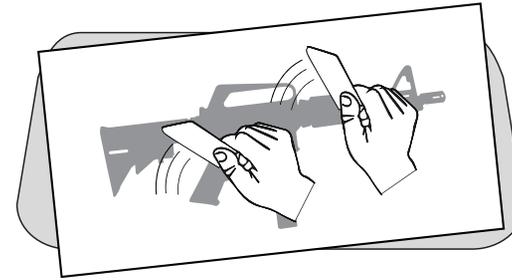


Allow in sun to dry between 2-6 hours

4. After appropriate dry time try lifting slowly one corner of the release paper until you reach the decal. If the decal does not lift you may proceed carefully pulling the release paper back at 180° back against itself. If vinyl starts to lift, use a credit card to rub down thru the paper until the decal sticks.

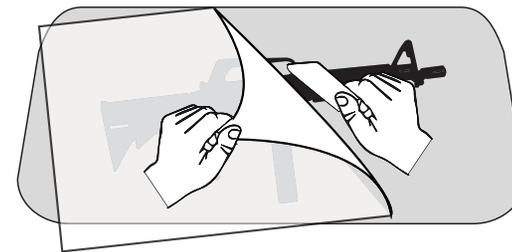

TIP:
Bubbles can be popped with the head of a pin or exacto knife after vinyl is installed and rubbed flat

4. Apply the vertical strips being careful to keep the parallel and equal distance apart to simulate gunrack

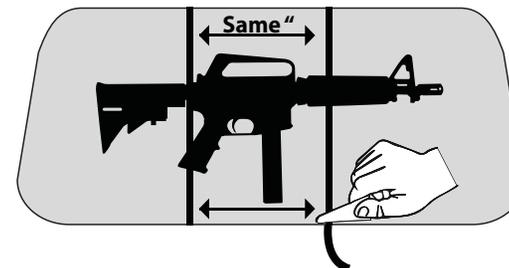

Trim off extra vinyl at windows edge


METHOD 2 - DRY MOUNT

(Recommended for more confident installers)


These should be applied on the inside of the truck's or SUV's back window, NOT ON THE OUTSIDE!!!

Note: if you have a sliding rear window you will have to cut narrow sections out of the decal and apply it in 2-3 pieces depending on your window style.


1. Clean surface with lint free cloth.

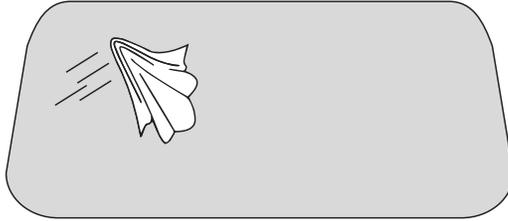


2. Position decal and tape hinge along entire top

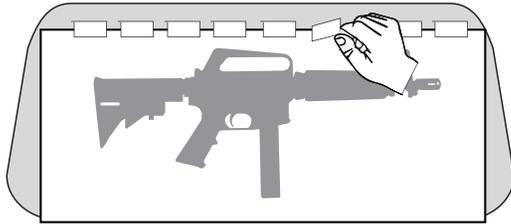


3. Flip up and carefully remove backing paper starting from one corner

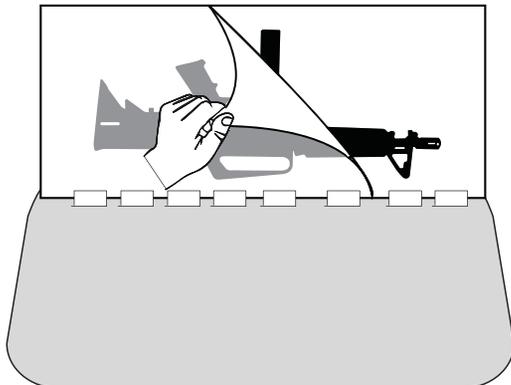

4. Flip decal back down, holding the bottom of release sheet out and away from the window. Holding tautly and using the edge of a credit card apply sweeping pressure to the decal beginning at top center working down and outward to each side working out bubbles as you go.

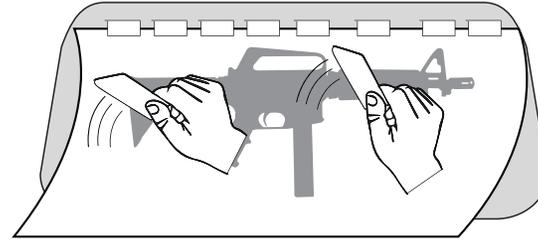


4. Carefully pull the release paper back at 180° back against itself. If vinyl starts to lift, use a credit card to rub down thru the paper or on the vinyl itself until the decal sticks.

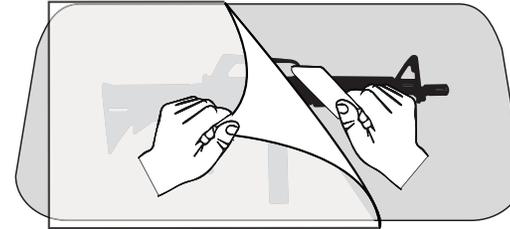

TIP:
Bubbles can be popped with the head of a pin or exacto knife after vinyl is installed and rubbed flat

5. Apply the vertical strips being careful to keep the parallel and equal distance apart to simulate gunrack

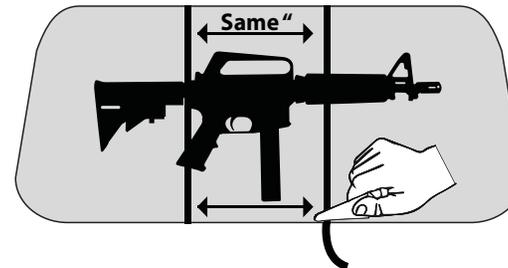

Trim off extra vinyl at windows edge