



TECHNICAL SPECIFICATIONS


PROJECT:			
PRODUCT NUMBER:		DATE:	
NOTES:			

iFlex™ LED Single Color Strip Lighting

SPECIFICATIONS

Watts	1.2 watts per foot
Voltage	12V DC
Colors <i>Choose a Single Color</i>	Warm White or Cool White or Red, Blue, Amber & more single colors available
Physical Details <i>16.4ft (5m) reels available</i>	.39" width – low profile Field cuttable every 2" LEDs spacing every 5/8"
Beam Angle	120°
Rated Life	35,000 hours <i>minimum</i>
Power Supply <i>Ordered Separately</i>	12V DC Regulated, Constant Voltage Available in 20w, 35w, 60w & 100w
Dimmable	With NuLEDs controllers
Compatible Controllers	NuLEDs SD-232 NuLEDs LD-003
Certifications & Code Requirements	<i>Indoor Only</i> CE RoHS Compliant
Material	Flexible printed circuit board
Mounting	3M adhesive backing
Optional <i>Additional costs may apply</i>	Aluminum channel Encapsulated
Warranty	3 year limited

Typical Applications
*Accent Lighting
 Architectural Lighting
 Landscape Lighting
 Cove Lighting*

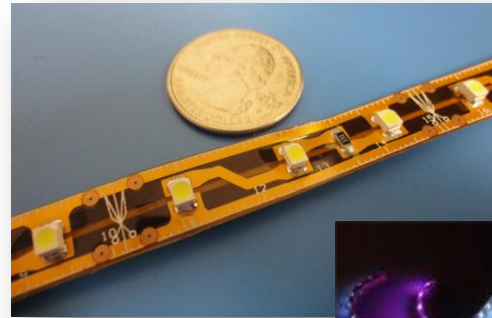

CE RoHS

iFlex™ Single Color LED Strip Lighting is a specification grade solution for accent and architectural lighting.

For residential and commercial applications.



Cove accent lighting application

Example Product

iF – WW – 12L

iFlex LED Warm White, 12 foot length strip

Ordering Information

<u>PRODUCT</u>	<u>COLOR</u>	<u>LENGTH</u>
iF -		- L
WW	= Warm White	Maximum of 12 feet per fixture <i>For varying fixture lengths – use separate part numbers</i>
CW	= Cool White	
B	= Blue	
R	= Red	
X	= Custom: _____	

Consult Numinus for custom colors, options and design support!

POWER SUPPLY *Ordered Separately*

Length X 1.2w = Total power	
20w	power supply
35w	power supply
60w	power supply
100w	power supply