

Houston International Specialty Inc.

Size	6.0
Grade	P110-HSCY
Weight	23.94

TCPC


Coupling and Pipe Dimensions (in)						
	Outer Diameter	Inner Diameter	Coupling Length	Make-up Loss	Wall Thickness	Drift Diameter
Coupling	6.700	5.200				
Pipe		5.200	10.125	4.607	0.400	5.075
Pin		5.200				

Torque Values (ft-lbs)				
During Make-Up			Max. Working Torque	Yield Torque
Minimum	Optimum	Maximum**		
16,100	19,500	24,150	28,600	38,000


Yield Stress (x1000 lbs.)	
Tensile	Compressive
880	880

Maximum Pressure (psi)	
Internal	External
14,580	15,555

Blanking Dimensions (in)			
	ID (+0.0 -0.032)	OD (+0.032 -0.0)	OAL (+1.5 -0.0)
Box End	5.200	6.700	5.607
Pin End	5.200	6.000	5.107

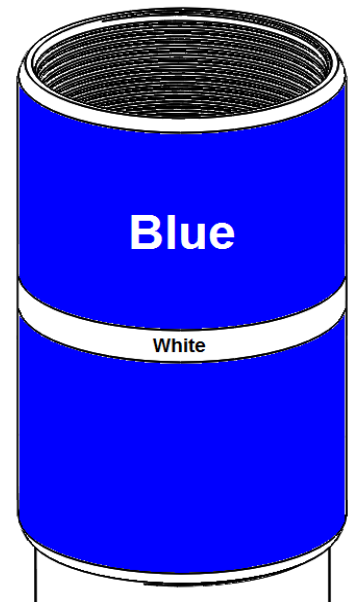

**Max M/U Torque may be exceeded only by approval from the Thread Representative.

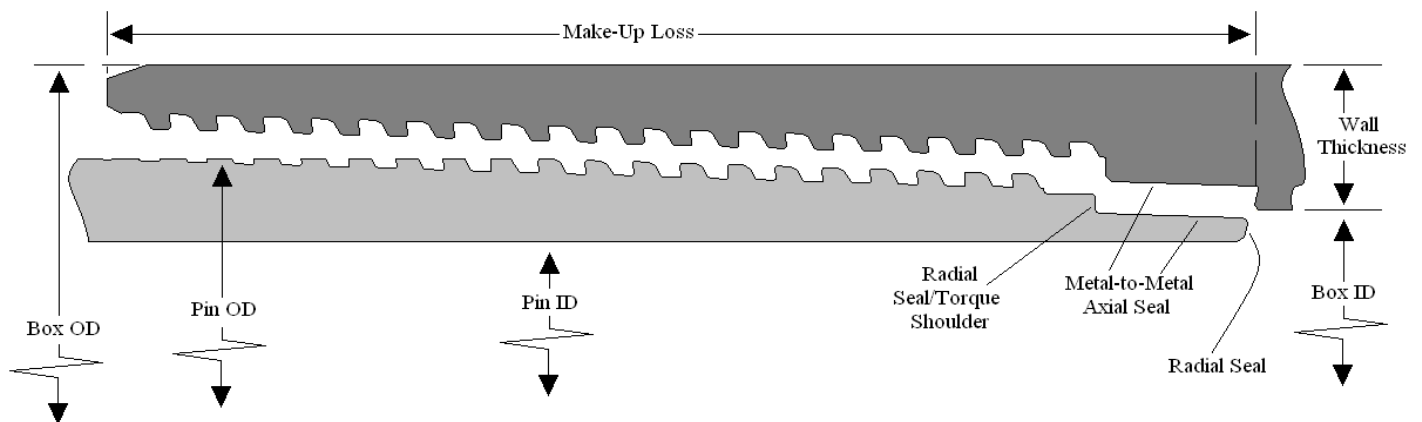

*Data are for information purposes only. Though HIS has made efforts to ensure accuracy, HIS makes no warranty for loss or damage due to its use.