



# STANDARD GAGE SELECTION

## CONTENT

03 Calipers.....



04 Depth Calipers.....



08 Micrometers.....



09 Depth Micrometers.....



10 Internal Micrometers.....



11 Dial & Electronic Indicators.....



12 Lever-type Indicators.....



12 Stands.....



13 Squares.....



14 Blocks.....



15 Parallels Set.....



15 Bevel Protactor; Inclinator.....



16 Height & Scribing Gauges.....





**STANDARD GAGE** is a product line from HEXAGON MANUFACTURING INTELLIGENCE, leading supplier in the field of metrology worldwide.


STANDARD GAGE has endorsed the maxim «Effective and affordable, each precision tool can be used with every confidence for efficient quality control».

Among others, the STANDARD GAGE line offers traditional gauges such as calipers, micrometers, dial gauges, indicators, height and scribing gauges, gauge blocks.

STANDARD GAGE products are mainly manufactured in Asia, and further selected according to strict quality criteria from HEXAGON MANUFACTURING INTELLIGENCE.

All relevant information about STANDARD GAGE is available on [www.standardgage.com](http://www.standardgage.com)


**Prices ex-works excluding VAT, valid from the 1<sup>st</sup> of September 2016. “Promo Prices” are valid until the 31<sup>st</sup> of March 2017, in the limit of the available stocks.**

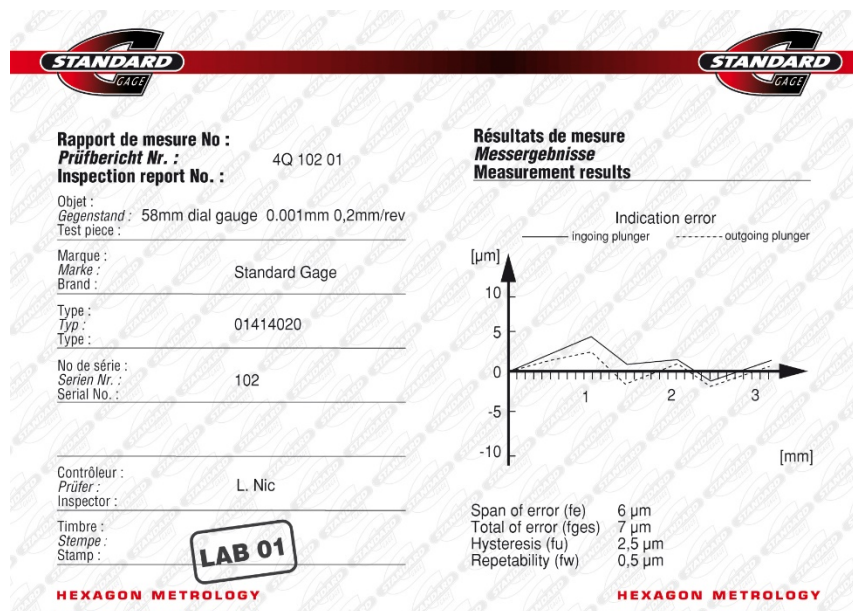



## VERNIER CALIPERS

- ▶ Finely graduated for precise measurement.
- ▶ Stainless steel.
- ▶ Satin-chrome scale and vernier backgrounds.
- ▶ Supplied in a suited case with inspection report.

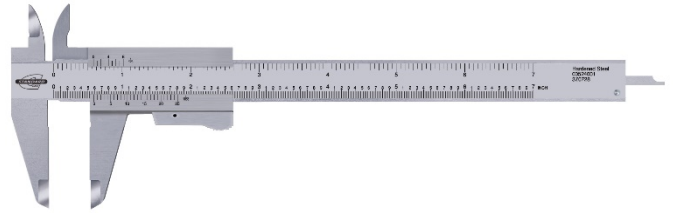

Order number	Measuring range	Length of jaws	Vernier reading lower scale	Vernier reading upper scale	List Price USD	Promo Price USD
<b>00524001</b>	0 ÷ 6 in	1.6 in	0.001 in	1/128 in	<del>35</del>	<b>28</b>
<b>00524002</b>	0 ÷ 8 in	1.6 in	0.001 in	0.001 in	<del>62</del>	<b>45</b>

## DIAL CALIPERS

- ▶ Shockproof design.
- ▶ Robust construction in stainless steel.
- ▶ Silky smooth sliding within the entire range
- ▶ Supplied in a suited case with inspection report



Order number	Measuring range	Length of jaws	Reading	Travel per revolution	Dial	List Price USD	Promo Price USD
<b>00524010</b>	0 ÷ 6 in	1.6 in	0.001 in	0.1 in	Black	<del>67</del>	<b>54</b>
<b>00524011</b>	0 ÷ 6 in	1.6 in	0.001 in	0.1 in	White	<del>67</del>	<b>54</b>
<b>00524012</b>	0 ÷ 8 in	2.0 in	0.001 in	0.1 in	White	<del>80</del>	<b>64</b>
<b>00524013</b>	0 ÷ 12 in	2.4 in	0.001 in	0.1 in	White	<del>122</del>	<b>98</b>

## TOP LINE ELECTRONIC CALIPERS

- ▶ Stainless steel beam and slider.
- ▶ With or without thumb roller.
- ▶ Direct metric/inch conversion.
- ▶ Resolution 0,01 mm/0.0005 in.
- ▶ Supplied in a suited case with inspection report.




Order number	Measuring range	Length of jaws	Thumb roller	List Price USD	Promo Price USD
<b>00534002*</b>	0 ÷ 6 in	1.6 in	-	<del>111</del>	<b>89</b>
<b>00534003*</b>	0 ÷ 6 in	1.6 in	✓	<del>112</del>	<b>90</b>
<b>00534004</b>	0 ÷ 8 in	2.0 in	✓	<del>141</del>	<b>113</b>
<b>00534005</b>	0 ÷ 12 in	2.4 in	✓	<del>193</del>	<b>154</b>

\*Only models with round depth rod



## UNIVERSAL DIGITAL CALIPERS

- ▶ Stainless steel
- ▶ Large LC display
- ▶ Direct metric/inch conversion
- ▶ Resolution 0.01 mm / 0.0005 in
- ▶ Supplied in a suited case with inspection report

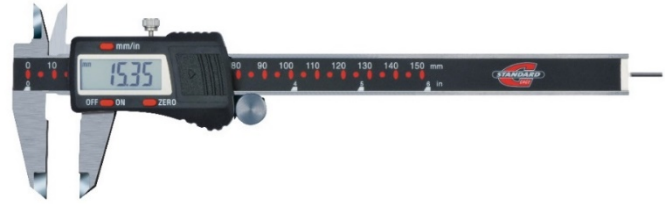

Order number	Measuring range	Length of jaws	Thumb roller	Depth foot incl.	List Price USD	Promo Price USD
00534020	0 ÷ 6 in	1.6 in	✓	-	66	59
00534020P	0 ÷ 6 in	1.6 in	✓	✓	87	69
00534021	0 ÷ 8 in	2.0 in	✓	-	73	66
00534022	0 ÷ 12 in	2.4 in	✓	-	120	108

### Depth foot for 6 in calipers :

Order number	Description	List price USD	Promo Price USD
00564001	Depth foot	21	-



## DEPTH CALIPER WITH VERNIER

- ▶ Finely graduated for precise measurement.
- ▶ Stainless steel.
- ▶ Satin-chrome scale and vernier backgrounds.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Reading	Beam section	Bridge length	List Price USD	Promo Price USD
00524020	0 ÷ 6 in	0.001 in	0.433 x 0.157 in	4 in	48	34
00524021	0 ÷ 10 in	0.001 in	0.433 x 0.157 in	4 in	72	50
00524022	0 ÷ 20 in	0.001 in	0.433 x 0.157 in	4 in	133	93

## DEPTH CALIPER WITH VERNIER AND ROTARY STOP PLATE

- ▶ Finely graduated for precise measurement.
- ▶ Stainless steel.
- ▶ Satin-chrome scale and vernier backgrounds.
- ▶ With rotary stop plate.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Reading	Beam section	Bridge length	List Price USD	Promo Price USD
00524039	0 ÷ 10 in	0.001 in	0,472 x 0,157 in	5.11 in	90	68



## DEPTH CALIPER WITH VERNIER AND FIXED STOP PLATE


- ▶ Finely graduated for precise measurement.
- ▶ Stainless steel.
- ▶ Satin-chrome scale and vernier backgrounds.
- ▶ With fixed stop plate.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Reading	Beam section	Bridge length	List Price USD	Promo Price USD
00524043	0 ÷ 8 in	0.001 in	0,393 x 0,118 in	4 in	<del>93</del>	<b>70</b>
00524044	0 ÷ 10 in	0.001 in	0,393 x 0,118 in	4 in	<del>120</del>	<b>90</b>

## DIAL DEPTH CALIPERS

- ▶ Solid stainless steel construction.
- ▶ Silky smooth sliding within the entire range.
- ▶ White dial face
- ▶ Supplied in a suited case with inspection report.

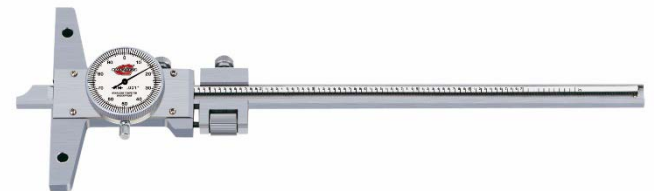

Order number	Measuring range	Reading	Travel per rev.	Bridge length	List Price USD	Promo Price USD
00524030	0 ÷ 6 in	0.001 in	0.1 in	4 in	<del>79</del>	<b>55</b>
00524031	0 ÷ 8 in	0.001 in	0.1 in	4 in	<del>91</del>	<b>64</b>
00524032	0 ÷ 12 in	0.001 in	0.1 in	4 in	<del>131</del>	<b>92</b>

## REMOVABLE BRIDGES FOR DEPTH CALIPERS

Order number	Length	List Price USD	Promo Price USD
00564002	7.1 in	<b>32</b>	-
00564003	10.2 in	<b>43</b>	-
00564004	12.6 in	<b>53</b>	-



## VERNIER CALIPER, T-TYPE

- ▶ Finely graduated for precise measurement.
- ▶ Stainless steel.
- ▶ Satin-chrome scale and vernier backgrounds.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Reading	Length of jaws	List Price USD	Promo Price USD
00524063	0 ÷ 12 in	1/128 in	6.3 in	<del>153</del>	<b>115</b>



## ELECTRONIC DEPTH CALIPERS

- ▶ Stainless steel with thumb roller
- ▶ Direct metric/inch conversion
- ▶ Large LC display
- ▶ Resolution 0.01 mm/0.0005 in
- ▶ Supplied in a suited case with inspection report



Order number	Measuring range	Beam section	Bridge length	List Price USD	Promo Price USD
<b>00534101</b>	0 ÷ 6 in	0.63 x 0.138 in	4 in	<b>66</b>	-
<b>00534102</b>	0 ÷ 8 in	0.63 x 0.138 in	4 in	<b>71</b>	-
<b>00534103</b>	0 ÷ 12 in	0.63 x 0.138 in	6 in	<b>116</b>	-
<b>00534104</b>	0 ÷ 20 in	0.63 x 0.138 in	6 in	<b>191</b>	-

## ELECTRONIC DEPTH CALIPERS WITH HOOK

- ▶ Stainless steel
- ▶ Direct metric/inch conversion
- ▶ Resolution 0,01 mm / .0005 in.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Beam section	Bridge length	List Price USD	Promo Price USD
<b>00534105</b>	0 ÷ 6 in	0.63 x 0.138 in	4 in	<del>81</del>	<b>65</b>
<b>00534106</b>	0 ÷ 8 in	0.63 x 0.138 in	4 in	<del>86</del>	<b>69</b>
<b>00534107</b>	0 ÷ 12 in	0.63 x 0.138 in	6 in	<del>137</del>	<b>110</b>
<b>00534108</b>	0 ÷ 20 in	0.63 x 0.138 in	6 in	<del>214</del>	<b>171</b>

## ELECTRONIC DEPTH CALIPERS, WITH 2 HOOKS

- ▶ Stainless steel.
- ▶ Direct metric/inch conversion.
- ▶ Resolution 0,01 mm / .0005 in.
- ▶ Large LC display.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Beam section	Bridge length	List Price USD	Promo Price USD
<b>00534109</b>	0 ÷ 6 in	0.63 x 0.138 in	4 in	<del>107</del>	<b>86</b>
<b>00534110</b>	0 ÷ 8 in	0.63 x 0.138 in	4 in	<del>121</del>	<b>97</b>
<b>00534111</b>	0 ÷ 12 in	0.63 x 0.138 in	6 in	<del>171</del>	<b>137</b>
<b>00534112</b>	0 ÷ 20 in	0.63 x 0.138 in	6 in	<del>218</del>	<b>174</b>



## ELECTRONIC DEPTH CALIPERS WITH STEEL TIP

- ▶ Stainless steel.
- ▶ Direct metric/inch conversion.
- ▶ Resolution 0,01 mm / .0005 in.
- ▶ Large LC display.
- ▶ Tip diameter and length: 1x6 mm
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Beam section	Bridge length	List Price USD	Promo Price USD
00534113	0 ÷ 6 in	0.63 x 0.138 in	4 in	<del>81</del>	<b>65</b>
00534114	0 ÷ 8 in	0.63 x 0.138 in	4 in	<del>86</del>	<b>69</b>
00534115	0 ÷ 12 in	0.63 x 0.138 in	6 in	<del>137</del>	<b>110</b>
00534116	0 ÷ 20 in	0.63 x 0.138 in	6 in	<del>214</del>	<b>171</b>

## TOOL SET

### Tool set including:

- ▶ 1 Micrometer with a 0 ÷ 1 in measuring range, reading to 0.0001 in ref. 00124010
- ▶ 1 dial Caliper with a 0 ÷ 1 in measuring range, reading to 0.001 in, black dial, ref. 00524010
- ▶ 1 Black colored plastic case
- ▶ 1 Inspection report provided with each tool

Order number	List Price USD	Promo Price USD
00524103	<del>113</del>	<b>99</b>





## EXTERNAL MICROMETERS

- ▶ Carbide-tipped measuring faces.
- ▶ Scale division 0.0001 in.
- ▶ Setting standard for sizes over 1 in.
- ▶ Ratchet friction thimble and locking nut.
- ▶ Delivered in a suited case with inspection report.



Order number	Measuring range	Precision	Setting standards	List Price USD	Promo Price USD
00124010	0 ÷ 1 in	0.00016 in	-	37	29
00124011	1 ÷ 2 in	0.00016 in	1 in	43	34
00124012	2 ÷ 3 in	0.00020 in	2 in	47	38
00124013	3 ÷ 4 in	0.00020 in	3 in	52	42
00124014	4 ÷ 5 in	0.00024 in	4 in	56	45
00124015	5 ÷ 6 in	0.00024 in	5 in	65	52
00124016	6 ÷ 7 in	0.00028 in	6 in	75	60
00124017	7 ÷ 8 in	0.00028 in	7 in	84	67
Order number	Measuring range	Single mics	Setting standards	List Price USD	Promo Price USD
00124040	Set 0 ÷ 3 in	3	1, 2 in	120	90
00124041	Set 0 ÷ 4 in	4	1, 2, 3 in	168	134

## CHROME STEEL FRAME MICROMETERS

- ▶ Chrome steel frame with engraved black-colored decimal equivalent.
- ▶ Scale division to 0.0001 in.
- ▶ Setting standard for sizes over 1 in.
- ▶ Ratchet friction thimble and locking nut.
- ▶ Delivered in a suited case with inspection report.



Order number	Measuring range	Precision	Setting standards	List Price USD	Promo Price USD
00124020	0 ÷ 1 in	0.00016 in	-	62	48
00124021	1 ÷ 2 in	0.00016 in	1 in	69	55
00124022	2 ÷ 3 in	0.00020 in	2 in	80	64

## EXTERNAL MICROMETER WITH DIGITAL COUNTER

- ▶ High-resolution analogue counter for error-free readout.
- ▶ Carbide-tipped measuring faces.
- ▶ Counter and mic. head resolutions to 0.0001 in.
- ▶ Setting standard for sizes over 1 in.
- ▶ Ratchet friction thimble and locking nut.
- ▶ Delivered in a suited case with inspection report.



Order number	Measuring range	Precision	Setting standards	List Price USD	Promo Price USD
00124024	0 ÷ 1 in	0.00016 in	-	78	62
00124025	1 ÷ 2 in	0.00016 in	1 in	84	67
00124026	2 ÷ 3 in	0.00020 in	2 in	92	74
Order number	Measuring range	Single mics	Setting standards	List Price USD	Promo Price USD
00124028	Set 0 ÷ 3 in	3	1, 2 in	242	194
00124029	Set 0 ÷ 4 in	4	1, 2, 3 in	355	268





## ELECTRONIC MICROMETER IP54

- ▶ High-resolution analogue counter for error-free readout.
- ▶ Carbide-tipped measuring faces.
- ▶ Counter and mic. head resolutions to 0.0001 in.
- ▶ Setting standard for sizes over 1 in.
- ▶ Ratchet friction thimble and locking nut.
- ▶ Delivered in a suited case with inspection report.



Order number	Measuring range	Precision	Setting standards	List Price USD	Promo Price USD
00134021	0 ÷ 1 in	0.00016 in	-	116	79
00134022	1 ÷ 2 in	0.00016 in	1 in	139	111
00134023	2 ÷ 3 in	0.00020 in	2 in	156	125
00134024	3 ÷ 4 in	0.00020 in	3 in	174	139
Order number	Measuring range	Single mics	Setting standards	List Price USD	Promo Price USD
00134045	Set 0 ÷ 3 in	3	1, 2 in	390	295
00134046	Set 0 ÷ 4 in	4	1, 2, 3 in	555	415

## DEPTH MICROMETERS WITH VERNIER READING

- ▶ High-precision, interchangeable depth rods, adjusted in increments of 1 in. No need for resetting when changing rods.
- ▶ Rod diameter 4,5 mm.
- ▶ Satin chrome finish.
- ▶ Hardened steel base, ground and lapped.
- ▶ Resolution: 0,01 mm, precision 0,005 mm.
- ▶ Ratchet stop and locking nut.
- ▶ Supplied in a suited case with inspection report.



Order number	Measuring range	Depth foot	Number of rods	List Price USD	Promo Price USD
00224001	0 ÷ 4 in	2.5 in	4	93	79
00224002	0 ÷ 6 in	2.5 in	6	118	106
00224003	0 ÷ 4 in	4 in	4	96	82
00224004	0 ÷ 6 in	4 in	6	121	109

## THREAD WIRE GAUGE

- ▶ Stainless steel
- ▶ Thread wires US 60°, 48 pieces
- ▶ 3 ÷ 48 thread per in



Order number	List Price USD	Promo Price USD
00224200	30	25

## MICROMETERS STANDS



00164009 (light model)



00164010 (heavy model)

Order number	List Price USD	Promo Price USD
00164009	40	36
00164010	77	69



## 3-POINTS INTERNAL MICROMETERS

- ▶ Application range 0.275 to 4 in.
- ▶ Measure close to the bottom of blind bores
- ▶ Allow access to deep holes using an extension delivered in standard: 4 in up to  $\varnothing$  0.5 in, then 6 in
- ▶ Carbide-tipped contact points for measuring application 0.5 ÷ 4 in.
- ▶ Supplied in a suited case along with setting ring, extension rod, inspection report



A = 0.02 in



Order number	Measuring range	Reading	Accuracy	Ring	L1 size	List Price USD	Promo Price USD
00924001	0.275 ÷ 0.350 in	0.0001 in	0.00016 in	0.275 in	2.14 in	355	320
00924002	0.350 ÷ 0.425 in	0.0001 in	0.00016 in	0.350 in	2.14 in	355	320
00924003	0.425 ÷ 0.500 in	0.0001 in	0.00016 in	0.500 in	2.14 in	355	320
00924004	0.500 ÷ 0.650 in	0.0002 in	0.00016 in	0.650 in	3.2 in	311	280
00924005	0.650 ÷ 0.800 in	0.0002 in	0.00016 in	0.650 in	3.2 in	311	280
00924006	0.800 ÷ 1.0 in	0.0002 in	0.00016 in	1.0 in	3.6 in	344	310
00924007	1.0 ÷ 1.2 in	0.0002 in	0.00016 in	1.0 in	3.6 in	344	310
00924008	1.2 ÷ 1.6 in	0.0002 in	0.00016 in	1.6 in	3.88 in	385	345
00924009	1.6 ÷ 2.0 in	0.0002 in	0.00020 in	1.6 in	3.88 in	444	400
00924010	2.0 ÷ 2.5 in	0.0002 in	0.00020 in	2.5 in	4.56 in	477	-
00924011	2.5 ÷ 3.0 in	0.0002 in	0.00020 in	2.5 in	4.56 in	509	-
00924012	3.0 ÷ 3.5 in	0.0002 in	0.00020 in	3.5 in	4.56 in	540	-
00924013	3.5 ÷ 4.0 in	0.0002 in	0.00020 in	3.5 in	4.56 in	564	-

### Sets of 3-points internal micrometers



Order number	Measuring range	Instruments	Setting rings	Extension	List Price USD	Promo Price USD
00924020	0.275 ÷ 0.5 in	3	0.275, 0.35, 0.5	4 in	1055	845
00924021	0.5 ÷ 0.8 in	2	0.65 in	6 in	546	435
00924022	0.8 ÷ 2.0 in	4	1.0, 1.6 in	6 in	1400	1120



## AGD2 DIAL INDICATORS

- ▶ Revolution counter.
- ▶ Tolerance pointers.
- ▶ Carbide contact point.
- ▶ AGD2 clamping shank with diameter to 0.375 in.
- ▶ Delivered in a suited case with inspection report.

Maximum permissible errors (scale divisions):

Measuring span	0.5 in	1 in
Repeatability limit	0.20	0.20
Max. hysteresis	0.33	0.33
Precision :		
1 revolution	1.00	1.00
1st revolution up to 2.5	1.00	1.00
> 2.5 up to 10 revolutions	3.00	3.00



Central lug back for AGD2 dial indicators, in option:

Order number	List Price USD	Promo Price USD
01464002	8.60	-

Order number	Measuring span	Scale division	Travel/rev.	Dial face	List Price USD	Promo Price USD
01424010	1 in	0.001 in	0.100 in	White	37	29
01424011	1 in	0.001 in	0.100 in	Black	37	29
01424012	0.5 in	0.0005 in	0.05 in	White	54	40

## ELECTRONIC INDICATORS

To 0.01 mm/0.0005 in or 0.001mm/0.00005in

- ▶ 8h6 diameter shank
- ▶ Measuring insert with a M2.5 clamping thread
- ▶ LCD display, 10.5 mm digit height
- ▶ Metric/inch conversion
- ▶ PRESET function
- ▶ ABS/DIFF measuring modes
- ▶ 01434003 & 01434004: TOL/MAX modes
- ▶ Supplied in a case made of industrial plastic with inspection report



Order number	Measuring range	Resolution	MPE	Repeatability	List Price USD	Promo Price USD
01434001	12.5 mm / 0.5 in	0.01 / 0.0005	20 µm	10 µm	90	79
01434002	25 mm / 1 in	0.01 / 0.0005	20 µm	10 µm	98	85
01434003	12.5 mm / 0.5 in	0.001 / 0.00005	4 µm	2 µm	159	-
01434004	25 mm / 1 in	0.001 / 0.00005	5 µm	2 µm	181	-



## LEVER INDICATORS

- ▶ Small and large dial diameters.
- ▶ Reading to 0.001, 0.0001 or 0.0005 in
- ▶ Carbide contact point,  $\varnothing$  0.08 in.
- ▶ Supplied in a case made of industrial plastic with inspection report.



### Maximum permissible errors:

Scale division	0.001 / 0.0005 in	0.0001 in
Deviation span of indication	0.4 $\mu$ in	0.08 $\mu$ in
Total deviation span of indication	0.5 $\mu$ in	0.14 $\mu$ in
Max. hysteresis	0.12 $\mu$ in	0.08 $\mu$ in
Deviation span of indications (Local deviation span of 0.1 mm)	0.2 $\mu$ in	0.04 $\mu$ in
Repeatability limit	0.12 $\mu$ in	0.08 $\mu$ in

Order number	Measuring span	Scale division	Diameter	Dial face	List Price USD	Promo Price USD
01824001	0.03 in	0.001 in	1.26 in	White	80	64
01824002	0.03 in	0.001 in	1.26 in	Black	80	64
01824003	0.03 in	0.0005 in	1.26 in	White	85	68
01824004	0.03 in	0.0005 in	1.26 in	Black	85	68
01824005	0.03 in	0.0005 in	1.54 in	White	85	68
01824006	0.03 in	0.0005 in	1.54 in	Black	85	68
01824011	0.008 in	0.0001 in	1.26 in	White	<del>111</del>	89
01824012	0.008 in	0.0001 in	1.26 in	Black	<del>111</del>	89
01824013	0.008 in	0.0001 in	1.54 in	White	<del>111</del>	89
01824014	0.008 in	0.0001 in	1.54 in	Black	<del>111</del>	89

## STANDS FOR DIAL GAUGES AND LEVER INDICATORS

- ▶ Dovetail clamp, except for 01664001
- ▶ 8 mm diameter fixing bore
- ▶ Adherence on a flat surface  $\approx$  450 N, weight 1.5 kg



01664001



01664002



01664003


Order number	Description	Arm length	Fixing bore	List Price USD	Promo Price USD
01664001	Magnetic stand	176 X 165 mm	$\varnothing$ 8 $\div$ 9.6 mm	48	-
01664002	Articulated arm	280 mm max	$\varnothing$ 8 mm	69	-
01664003	Flexible arm	350 mm max	$\varnothing$ 8 $\div$ 9.6 mm	70	-



## FLAT EDGED SQUARES 90°

- ▶ DIN 875.
- ▶ Grade "A" or "B".
- ▶ Stainless steel squares.
- ▶ Supplied in a suited case with inspection report.

Order number	Dimensions	Grade	List Price USD	Promo Price USD
08124001	3 in	A	47	38
08124002	4 in	A	55	44
08124003	6 in	A	70	56
08124004	9 in	A	89	71
08124005	12 in	A	111	89
08124006	3 in	B	32	24
08124007	4 in	B	37	28
08124008	6 in	B	48	36
08124009	9 in	B	72	54
08124010	12 in	B	95	71

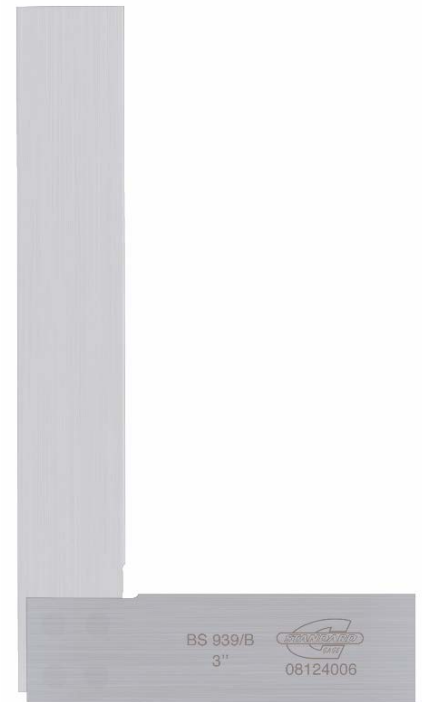

## DOUBLE SQUARE

- ▶ DIN 875.
- ▶ Graduation to the 8ths, 16ths, 32nds and 64ths.
- ▶ Cast head, satin chrome blades.
- ▶ Supplied in a suited carton box with inspection report.


Order number	List Price USD	Promo Price USD
08134200	32	26





## BLOCK SET, 1 HOLE

- ▶ Squareness tolerance : 0,002 mm.
- ▶ Matched accuracy :  $\pm 0,005$  mm.
- ▶ Holes :  $\varnothing = 12,8$  mm.
- ▶ Dimensions : 25,4 x 50,8 x 76,2 mm (1 x 2 x 3").
- ▶ Provided in a plastic case.

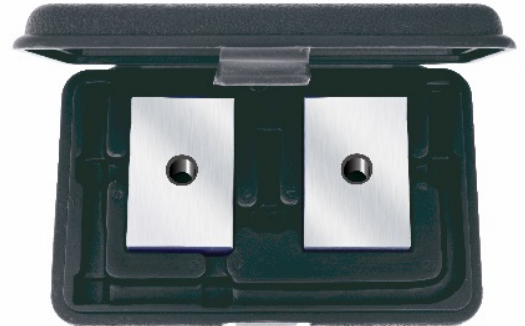

Order number	List Price USD	Promo Price USD
06764001	59	47

## BLOCKS SETS, 23 HOLES


- ▶ Squareness tolerance: 0,005 mm.
- ▶ Matched accuracy:  $\pm 0,005$  mm.
- ▶ Provided in a case



Order number	Dimensions	Holes	List Price USD	Promo Price USD
06764002	25,4 x 50,8 x 76,2 mm	18 x $\varnothing 8,9$ mm 5 x M 8,5	59	47
06764003	50,8 x 101,6 x 152,4 mm	18 x $\varnothing 16,3$ mm 5 x M 14	206	165

## ANGLE V-BLOCK WITH CLAMP

- ▶ Adjustable angle V-block.
- ▶ Angle between 30° - 0° - 60°.
- ▶ Provided in a wooden box.

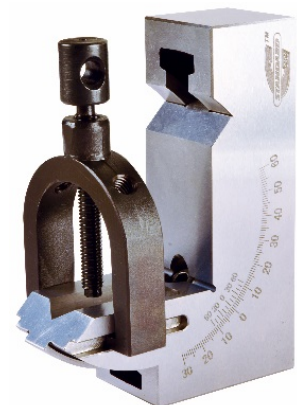

Order number	Dimensions	List Price USD	Promo Price USD
06764004	30 x 49 x 101 mm	99	79



## SET OF PARALLELS

- ▶ 4 pairs of parallels.
- ▶ Accuracy : 0,005 mm.
- ▶ Matched accuracy :  $\pm 0,005$  mm.
- ▶ Holes :  $\varnothing = 7,93$  mm.
- ▶ Provided in a plastic case.

### Set compositions:

Width	Length	Thickness	Pieces
25,40 mm	152,40 mm	4,76 mm	2
31,75 mm	152,40 mm	4,76 mm	2
38,10 mm	152,40 mm	12,70 mm	2
44,45 mm	152,40 mm	12,70 mm	2

Order number	List Price USD	Promo Price USD
<b>06764020</b>	<b>99</b>	<b>79</b>



## UNIVERSAL BEVEL PROTRACTOR WITH VERNIER

- ▶ Made from stainless steel
- ▶ Laser stamped scales, satin-chrome backgrounds
- ▶ Parallax-free readout
- ▶ Magnifying glass for easy reading
- ▶ Adjustable beam to any position within the entire range



Order number	Measuring range	Reading	Blade length	List Price USD	Promo Price USD
<b>00634001</b>	4 X 90°	0.05°	12 in	<del>183</del>	<b>165</b>

## POCKET ELECTRONIC INCLINOMETER

- ▶ Aluminum base with built-in-magnet
- ▶ Display of angle in degrees and in percentage
- ▶ Hold function
- ▶ Accuracy  $\pm 0.2^\circ$




Order number	Measuring range	Reading	Length	List Price USD	Promo Price USD
<b>05334010</b>	4 X 90°	0.1°	4 in	44	<b>39</b>



## SCRIBING GAUGES WITH METRIC/INCH VERNIER READING

- ▶ Unbeatable for accurate and reliable scribing
- ▶ Stainless steel
- ▶ Satin-chrome scales and vernier backgrounds
- ▶ Supplied in a suited case with inspection report

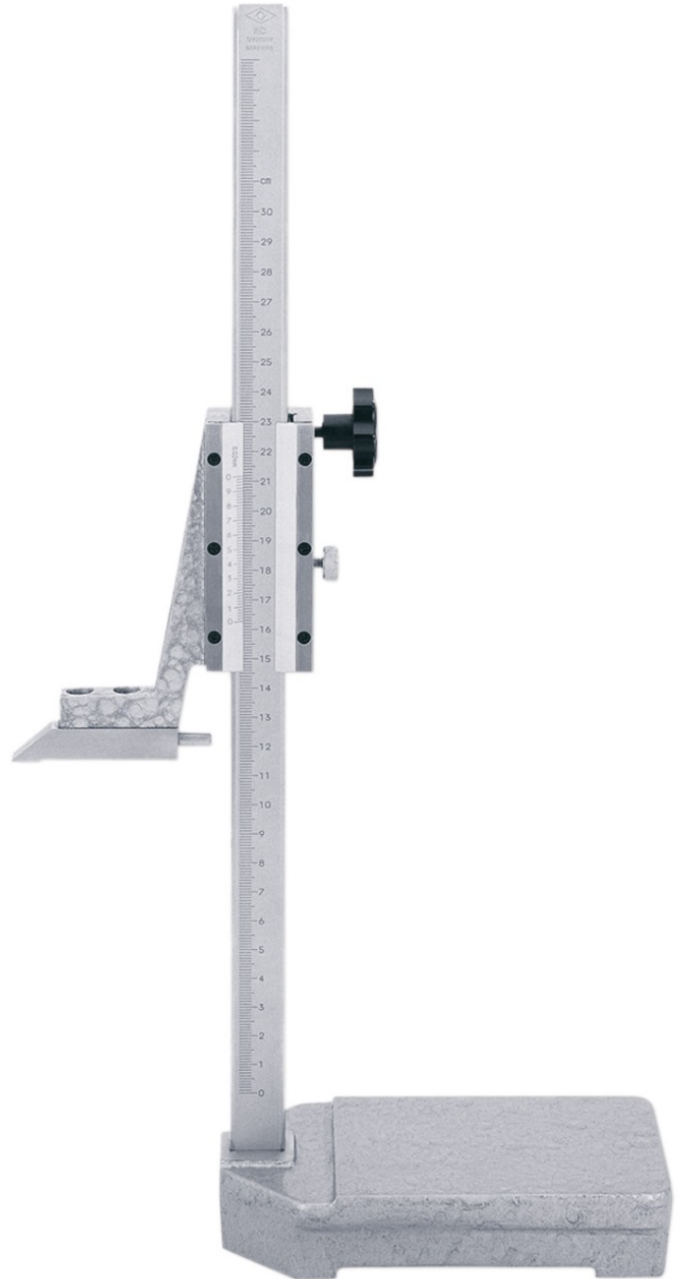

Order number	Measuring range	Reading	Scriber	List Price USD	Promo Price USD
<b>07734001</b>	0 ÷ 300 mm / 0 ÷ 12 in	0.02 mm / 0.001 in	057139	<del>220</del>	<b>195</b>
<b>07734002</b>	0 ÷ 500 mm / 0 ÷ 20 in	0.02 mm / 0.001 in	057140	<del>372</del>	<b>330</b>





## DIAL SCRIBING GAUGES

- ▶ Robust construction in stainless steel.
- ▶ Smooth move throughout the measuring range.
- ▶ Supplied in a suited case with inspection report.
- ▶ White dial face.



Order number	Measuring range	Scale division	Scriber	List Price USD	Promo Price USD
<b>07724001</b>	0 ÷ 12 in	0.001 in	057137	<del>268</del>	<b>225</b>
<b>07724002</b>	0 ÷ 24 in	0.001 in	057138	<del>590</del>	<b>495</b>



## ELECTRONIC SCRIBING GAUGES

- ▶ Direct metric/inch conversion.
- ▶ Precision:
  - Model 300 mm/12 in:  $\pm 0,04$  mm.
  - Model 600 mm/24 in:  $\pm 0,05$  mm.
- ▶ Resolution to 0,01 mm / 0,0005 in.
- ▶ Large high-contrast LC display.
- ▶ Hold function.
- ▶ ABS/INC measurement.
- ▶ RS232 data output.
- ▶ Floating zero.
- ▶ Locking screw, carbide scriber.
- ▶ Supplied in a resistant case with inspection report.



Order number	Measuring range	Resolution	Scriber	List Price USD	Promo Price USD
<b>07734003</b>	0 ÷ 300 mm / 0 ÷ 12 in	0.01 mm / 0.0005 in	057137	<del>370</del>	<b>325</b>
<b>07734004</b>	0 ÷ 600 mm / 0 ÷ 24 in	0.01 mm / 0.0005 in	057137	<del>672</del>	<b>590</b>

Distributed by :