



COMPREHENSIVE MACHINERY SOLUTIONS

BORING MACHINES

SPECIALIZING IN MACHINE TOOL SALES AND SERVICE

Boring Machines

BOSTRAM



Bostram 5.000 LMTG
India



Bostram 7.000 Gerdau
Spain

BOSTRAM


Technical specifications	Unit	Bostram 5.000		Bostram 6.000		Bostram 7.000		
Boring spindle diameter	mm	160	180	160	180	200	225	260
Vertical "Y" axis	mm	3500/4.000/4.500/5.000		4500/5.000/5.500/6.000		5000/5.500/6.000/6.500/7.000		
Longitudinal "X" axis	mm	4.000 + N x 1.000		4.000 + N x 1.000		4.000 + N x 1.000		
RAM section	mm	450 x 510		450 x 510		500 x 550		
RAM stroke "Z" axis	mm	1.000	1.300	1.300	1.500	1.500		1.700
Spindle stroke "W" axis	mm	1.000	1.200	1.000	1.200	1.200		1.500
Max. spindle power (S1, 100%)	kW	89		115		145		
Max. spindle torque (S1, 100%)	Nm	8040		15350		30.330		
Max. spindle speed	min ⁻¹	3500		3500		2.200		
Rapid feeds ("X", "Y", "Z" & "W")	mm/min	15.000	25.000	15.000	25.000	15.000		25.000
Type of guides ("X", "Y" & "Z")		Hydrostatic		Hydrostatic		Hydrostatic		



Bostram 7.000 Ensa
Spain



Bostram 7.000 Gerdau
Spain

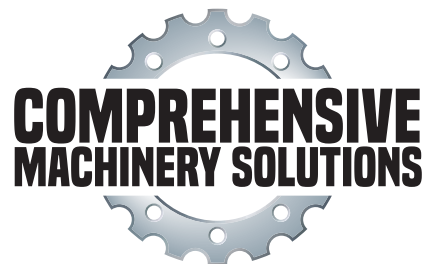

114 Hall Street, Concord NH, 03301 USA
+1 603 496 2526 | ajennison@cmsnh.net | www.cmsnh.net