



## **MVE Doble QWick**<sup>™</sup>





The Doble QWick Series utilizes an absorbent wicking material that charges with liquid nitrogen in fewer than two hours, providing the capacity for same-day vapor shipping. A unique absorbent layer in the base of the storage tanks of both series enables them to be charged with nitrogen and employed as dry shippers with hold times of up to 30 days. Once at the final destination, the tanks can be filled with liquid and used for long term storage, therefore avoiding the need for return shipments.


## **Features Include:**

- Liquid and vapor storage options
- Low liquid nitrogen consumption
- Convenient lightweight package
- Doble QWick Series CHARGES IN LESS THAN TWO HOURS

Visit www.chartbiomed.com for more information.



## **Tank Features**

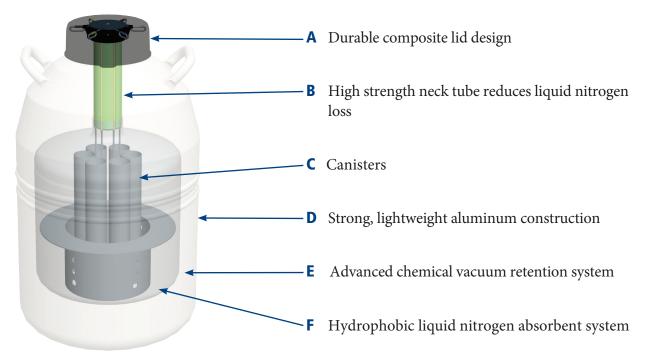

| Doble QWick Series                      | 10/660     | 20/660      | 17/2400     | 20/2100     | 14/4500     | 14/3500     |
|---|------------|-------------|-------------|-------------|-------------|-------------|
| Normal Working Duration days for liquid | 37         | 116         | 50          | 100         | 74          | 72          |
| Normal Working Duration days for vapor  | 10         | 20          | 17          | 20          | 14          | 14          |
| Maximum Storage Capacity                |            |             |             |             |             |             |
| Number of Canisters                     | 6          | 6           | 6           | 6           | 6           | 10          |
| No. of 1/2 cc Straws 10/cane            | 660        | 660         | 2,400       | 2,100       | 4,500       | 3,500       |
| Vial Capacity                           | 210        | 210         | 810         | 630         | 1,320       | 1,050       |
| Performance                             |            |             |             |             |             |             |
| Liquid Nitrogen Capacity L              | 10.0       | 18.5        | 28.0        | 32.0        | 46.0        | 46.0        |
| Vapor Capacity <i>L</i>                 | 3.1        | 2.8         | 8.4         | 6.7         | 8.4         | 9.6         |
| Static Evaporation Rate L/day           | 0.17       | 0.10        | 0.35        | 0.20        | 0.40        | 0.40        |
| Unit Dimensions                         |            |             |             |             |             |             |
| Neck Opening <i>in (mm)</i>             | 2.18 (55)  | 2.18 (55)   | 3.81 (97)   | 3.50 (89)   | 5.00 (127)  | 5.00 (127)  |
| Overall Height <i>in (mm)</i>           | 21.6 (549) | 25.7 (652)  | 22 (559)    | 26.6 (676)  | 26.5 (673)  | 26.5 (673)  |
| Outside Diameter in (mm)                | 10.2 (260) | 14.5 (368)  | 18.2 (462)  | 18.2 (462)  | 20.0 (508)  | 20.0 (508)  |
| Canister Height <i>in (mm)</i>          | 11 (279)   | 11 (279)    | 11 (279)    | 11 (279)    | 11 (279)    | 11 (279)    |
| Canister Diameter <i>in (mm)</i>        | 1.65 (41)  | 1.65 (42)   | 3.09 (78)   | 2.81 (72)   | 4.00 (101)  | 2.81 (72)   |
| Weight Empty <i>lb. (kg)</i>            | 14.5 (6.6) | 23.0 (10.4) | 33.0 (15.0) | 34.0 (15.4) | 40.0 (18.1) | 40.0 (18.1) |
| Weight Charged vapor lb. (kg)           | 18.5 (8.4) | 30.2 (13.7) | 47.0 (21.3) | 45.5 (20.6) | 53.5 (24.3) | 53.5 (24.3) |
| Weight Full <i>liquid lb. (kg)</i>      | 32 (14.5)  | 56 (25.4)   | 89 (40.4)   | 92 (41.7)   | 117 (53.1)  | 117 (53.1)  |