


# CL12

Service more vehicles and make more money with Challenger's CL12, a 12,000 lb. capacity 2-post lift. The CL12 comes standard with 3-stage front and 3-stage rear arms, which provide the advantage of lifting many common cars, trucks, vans and SUVs within rated capacity.

The CL12 has features you would expect to pay more for, like geared arm restraints, 3-stage front and 3-stage rear arms and all necessary adapters for lifting trucks.

3-stage front and  
3-stage rear arms

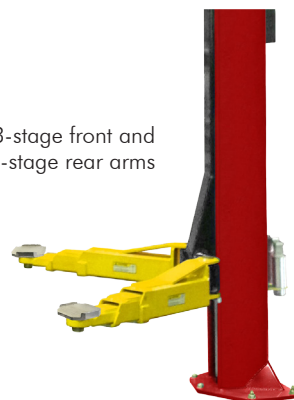



**LIFT ANYTHING  
FROM SMALL SEDANS  
TO HEAVY-DUTY TRUCKS  
IN ONE BAY**



**CL12** | 12,000 LB. CAPACITY

- » 2-post symmetric lift
- » 3-stage front and 3-stage rear arms
- » Powder coat paint

**CL Challenger Lifts**

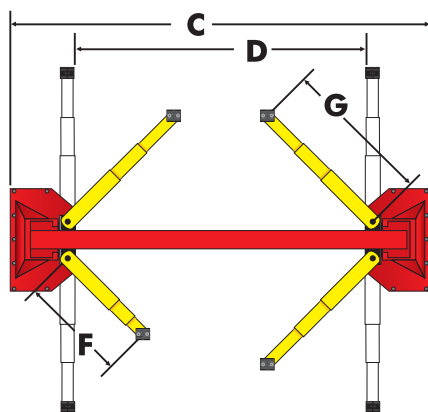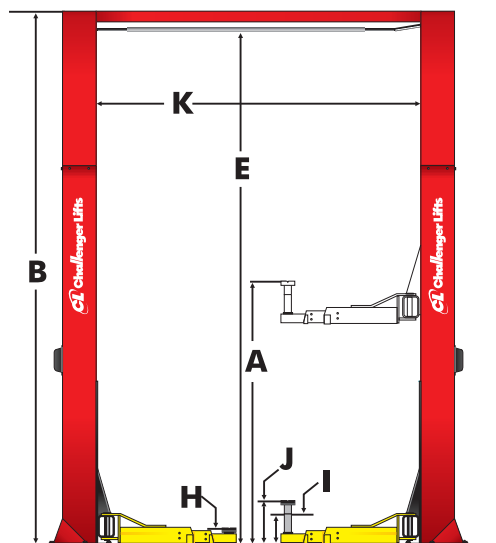

## FEATURES & BENEFITS

- » 3-stage front and 3-stage rear arms provide greater extension and retraction
- » Geared arm restraints standard
- » Single-point mechanical lock release system allows technician to disengage both column locks simultaneously
- » Oversized steel pulley reduces stress on equalization system for increased durability
- » 60" lifting carriage disperses load and lessens column stress
- » Standard combination stack screw pads and storage brackets accommodates a wide range of vehicle pick up points.
- » Padded overhead shut off system prevents vehicle damage from being raised too high
- » 1' and 2' column height extensions available



Comes standard with adjustable foot pads, stack adapter, and organizer rack


Model Number	CL12	CL12-1	CL12-2
Lifting Capacity	12,000 lbs.		
Lifting Configuration	Symmetric		
Arms	3-stage front/3-stage rear		
<b>A</b> Rise Height <sup>1</sup>	84.75"		
<b>B</b> Overall Height	13' 8"	14' 8"	15' 8"
<b>C</b> Overall Width	11' 10"		
<b>D</b> Drive-Thru Clearance	103.5"		
<b>E</b> Floor to Overhead Switch	157"	169"	181"
<b>F</b> Arm Reach (Min.)	27.5"		
<b>G</b> Arm Reach (Max.)	59"		
<b>H</b> Screw Pad Height <sup>2</sup>	5" / 6.625"		
<b>I</b> Screw Pad Height <sup>2</sup> (Medium Extensions)	8" / 9.625"		
<b>J</b> Screw Pad Height <sup>2</sup> (High Extensions)	11" to 12.625"		
<b>K</b> Inside Columns	114.5"		
Motor / Voltage <sup>3</sup>	2HP, 208v-230v, 60Hz, 1Ph		
Speed of Rise	63 s		
Ceiling Height Required	13' 9"	14' 9"	15' 9"
ALI/ETL Certified	✓		
Colors Available			

<sup>1</sup> Rise height is measured with high extension. <sup>2</sup> Medium and high auxiliary adapter extensions are standard. <sup>3</sup> Optional 3-phase electrical also available, please specify at time of order. \* Frame engaging adapters are required when lifting vehicles with frame construction.

## OPTIONAL ACCESSORIES



2' column height extensions accommodate higher profile vehicles



Air electric work station

For more information, contact your Authorized Challenger Lifts Distributor:



AAIA  
Automotive Aftermarket  
Industry Association



The Automotive Lift Institute (ALI) certifies that the CL12 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2011 and is Third Party Validated by the ETL Testing Laboratory.

800-648-5438 | 502-625-0700 | Fax: 502-625-0711 | Email: [sales@challeng lifts.com](mailto:sales@challeng lifts.com)  
2311 South Park Road | Louisville, KY 40219