


特性 Feature			
型号 Model	单位	CQDH13	CQDH14
配置号 Configuration No.		850	850
类型 Type		剪刀式/Reach (标配倾斜、侧移/Tilt, Side shifter STD)	剪刀式/Reach (标配倾斜/Tilt STD)
门架类型 Mast type		三级3-Stage STD	三级3-Stage STD
额定载重 Load capacity	kg	1300	1400
载荷中心距 Load center	mm	500	500
轴距 Wheel base	mm	1478	1478
操作类型 Operating type		步行式/walkie	步行式/walkie
车轮 Wheels			
轮子类型(前/后) Wheels type		PU	PU
驱动轮/平衡轮/承重轮 数量 Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/4	1/4
尺寸 Dimension			
门架前移距离 Reach distance	mm	0-550	0-550
标准门架起升高度 Standard lift height	mm	3800/4000/4500/5000/5500	3800/4000/4500/5000/5500
门架作业时整车最大高度 Max extend height	mm	4991/5191/5691/6191/6691	4991/5191/5691/6191/6691
门架缩回时整车静态高度 Mast lowered height	mm	1914/2081/2248/2415/2582	1914/2081/2248/2415/2582
货叉最低高度 Lowered fork height	mm	55	55
标准货叉规格(长/宽/厚) Fork size(length/width/thickness)	mm	1070/100/40	1070/100/40
整车全长 Overall length	mm	2225	2225
车体宽度 Overall width	mm	1430	1430
货叉外侧间距 Outside width between forks	mm	200-755	200-755
货叉侧移距离 Distance shift fork side	Grad	150	-
货叉倾斜角度(前/后) Tilt of fork (F/B)	mm	4/3	4/3
最小转弯半径, 踏板收起/放下 Min. Turning radius		1566	1566
最小直角堆垛通道宽度, 踏板收起/放下 (托盘800×1200, 1200沿货叉放置) Min. Aisle width for pallets 800×1200	mm	2135	2135
最小直角堆垛通道宽度, 踏板收起/放下 (托盘1000×1200, 1200沿货叉放置) Min. Aisle width for pallets 1000×1200	mm	2315	2315
最小离地间隙 Min. ground clearance	mm	50	50
性能 Performance			
最大行驶速度, 满载/空载 Travel speed, laden/unladen	km/h	3.5/4	3.5/4
最大起升速度, 满载/空载 Lift speed, laden/unladen	mm/s	130/230	130/230
最大下降速度, 满载/空载 Lowering speed, laden/unladen	mm/s	130/230	130/230
爬坡度, 满载/空载 Gradeability, laden/unladen	%	3/5	3/5
电气配置 Electrical configuration			
驱动电机/起升电机/转向电机 Drive motor / Lift motor / Steering motor	KW	AC1.5/DC3.0/DC0.15	AC1.5/DC3.0/DC0.15
蓄电池电压 Battery voltage	V	24	24
蓄电池容量 Battery capacity	Ah	345(可选/Options:FAAM345)	345(可选/Options:FAAM345)
制动 Brake		电磁/再生 Electromagnetic/Regenerative	电磁/再生 Electromagnetic/Regenerative
控制器型号 Controller		CURTIS	CURTIS
重量 Weight			
蓄电池重量 Battery weight	kg	300	300
自重(包含蓄电池) Service weight with battery	kg	2420	2400

*本公司保留更改产品设计和规格的权利, 恕不另行通知。

型号/Model: **CQDH13/14-850**

AC 1300/1400Kg

载荷曲线图 Load Curve

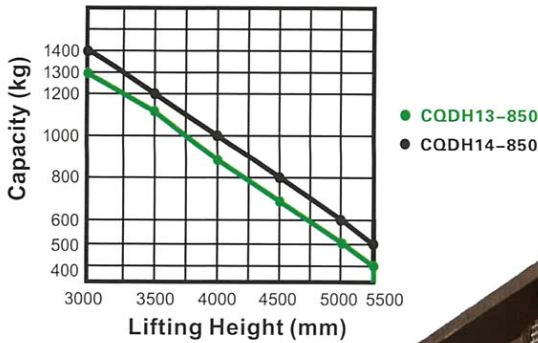

- AC** **EPS**
- Moon Walk**
- 三速下降模式**

新品
NEW



剪刀叉式堆垛车

优点:

配置和性能

- EPS电子助力转向, 轻便、静音;
- 双路电磁阀, 三种下降速度模式;
- 交流驱动, 无碳刷、免维护;
- 美国CURTIS驱动控制器;
- 电磁、再生制动系统;
- 起升、前移、倾斜自动电限位, 延迟电机和电池寿命;
- 配备双倾斜油缸, 货物倾斜更平稳;
- 标配Moon Walk功能, 手柄在任意角度车辆可以直线行驶。

安全

- 弯道自动减速装置, 更安全;
- 驱动无级调速, 安全、静音;
- 控制器多重自动保护系统;
- 紧急反向装置/紧急制动开关;
- 可选装高货位自动减速装置。

Advantages:

Configuration And Performance

- Electronic power steering system, light and low noise.
- Two-way magnetic valve, three drop speed mode.
- AC Driving system, No carbon brush, maintenance free.
- USA CURTIS driving controller.
- Electromagnetic, regenerative braking system.
- Lifting, reach, tilt automatic electric limit, delay motor and battery life.
- Equipped with double oil cylinder, fork tilt more smoothly.
- Moon Walk is STD. Handle at any angle, the vehicle goes straight.

Safety

- Curve automatic deceleration devices, more safe.
- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.
- Options of high position automatic reduction device.

车型 Type	起升高度 mm Lift height	叉腿外侧间距 mm Outside width between legs	叉腿内侧间距mm Inside width between legs
CQDH13-850	3800/4000/4500/5000/5500	1270/1420/1470	1070/1220/1270
CQDH14-850	3800/4000/4500/5000/5500	1270/1420/1470	1070/1220/1270