

# UNIOIL ENGINE OIL SAE 10W-40 API SL-CF

# **Product Description**

UNI OIL ENGINE OIL SAE 10W-40 API SM-CF is premium quality engine oil developed to the highest standards of lubricant quality, reliability and dependable protection.

# **Features and Benefits**

UNI OIL ENGINE OIL SAE 10W-40 API SM-CF is formulated with a proprietary mixture of premium and super premium quality base oils with additive technology that provides superior engine protection under a variety of operating conditions. This oil is also approved by leading car manufactures and meets the latest industry standards for service fill use. Key features and benefits include:

- Excellent oxidation stability to reduce engine deposits and sludge build-up to keep engines running reliably
- Excellent high and low temperature properties to provide dependable protection across a wide range of driving conditions
- Enhanced low temperature capabilities for flawless cold weather starting

# Applications

UNI OIL ENGINE OIL SAE 10W-40 API SL-CF can be used in a variety of automobiles, light trucks and vans, and for anyone seeking a dependable super premium quality product.


### Specifications

API SM/SJ/CF, ACEA A3,B3, Volkswagen 00 505, Mercedes Benz MB 229.1, PSA E/D-02 Level 2

### **Typical Characteristics**

UNI OIL ENGINE OIL SAE 10W-40 API SL-CF	
SAE Grade	10W-40
Viscosity, ASTM D 445	
cSt @ 40° C	98
cSt @ 100° C	14.4
Viscosity Index, ASTM D 2270	145
Pour Point, °C, ASTM D 97 (Min)	-34
Flash Point, °C, ASTM D 92 (Min)	210

Note: the information contained herein is subject to change without notification. Typical Properties may vary slightly. **Health and Safety** Based on available information, this product is not expected to produce adverse effects on health when used for the intended application and the recommendations provided in the Material Safety Data Sheet (MSDS) are followed. MSDS's are available upon request through your sales contract office, or via the Internet. This product should not be used for purposes other than its intended use. If disposing of used product, take care to protect the environment Note: the information contained herein is subject to change without notification. Typical Properties may vary slightly.

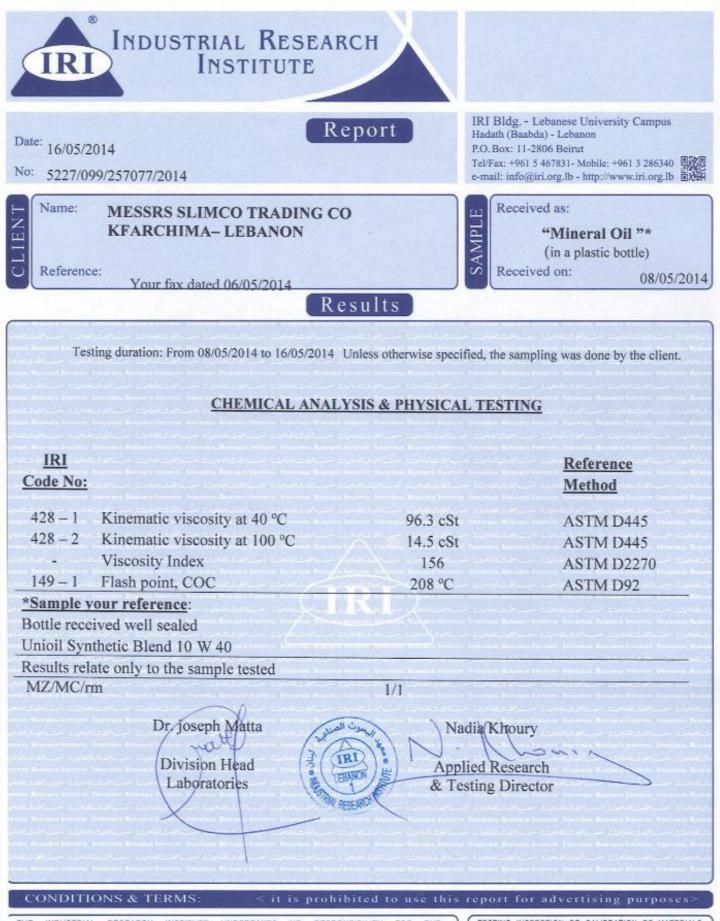

THE INDUSTRIAL RESEARCH INSTITUTE UNDERTAKES NO RESPONSIBILITY FOR THE AUTHENTICITY OF THE SAMPLE FROM WHICH THE SPECIMENS TESTED SUBJECT OF THIS REPORT ARE TAKEN UNLESS SAMPLING IS CONDUCTED BY THE INSTITUTE ITSELF WHICH FACT WHEN APPLICABLE WILL BE CLEARLY INDICATED AS PART OF THE REPORT. THE INFORMATION GIVEN IN THIS REPORT DELIVERED IN A SEALED ENVELOPE IS FOR THE USE OF THE CLIENT AND IS NOT TO BE ABSTRACTED OR PUBLISHED BY ANY MEANS OR IN ANY FORM IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF THE INDUSTRIAL RESEARCH INSTITUTE. IT MAY BE PHOTOCOPIED STRICTLY FOR THE ASSUMED EXCEPT WHEN THE INTERPRETATION IS GIVEN IN WRITING BY THE INDUSTRIAL RESEARCH INSTITUTE.

TESTING INSPECTION OR CALIBRATION OF MATERIALS INSTRUMENTS AND OTHER ARTICLES IS ONLY UNDERTAKEN BY THE INDUSTRIAL RESEARCH INSTITUTE SUBJECT TO THE EXPRESS STIPULATION THAT NO RESPONSIBILITY OF ANY KIND OR HOWSOEVER ARISING SHALL ATTACH TO THE INDUSTRIAL RESEARCH INSTITUTE OR TO ITS EMPLOYEES IN RESPECT TO ANY LOSS INJURY OR DAMAGE ARISING DIRECTLY OR INDIRECTLY OF OR IN CONNECTION WITH ANY SUCH TESTING INSPECTION OR CALIBRATION OR ANY FAILURE OR OMMISSION IN REGARD THEREOF.