


SUBWOOFER PROS™

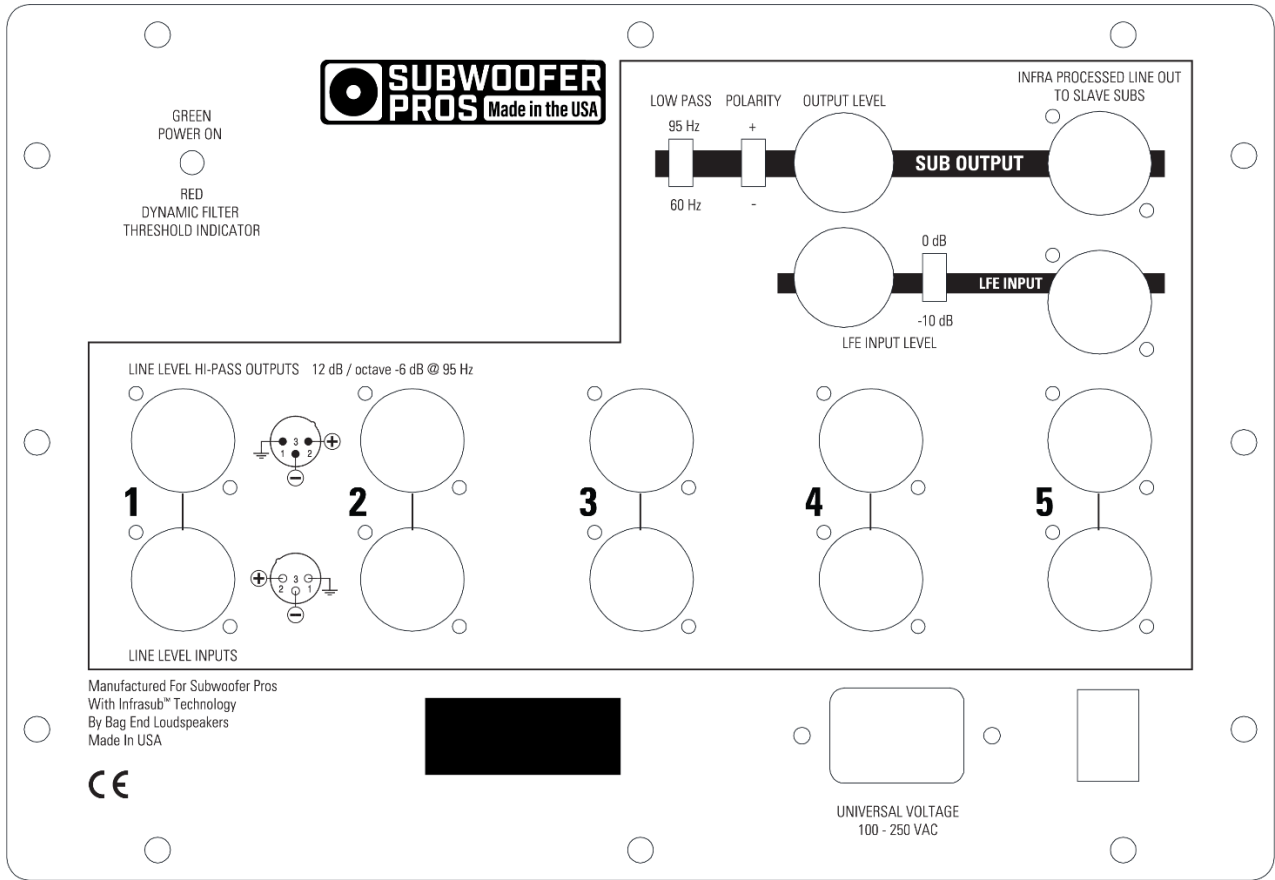

Studio Sub 18 Specifications:

Enclosure:	18mm 13 Ply Birch Plywood
Finish:	Black Ro Tex™ True water born environmental finish
Grille:	Black cloth grille
Low Frequency Components:	EL-18R Transducer, 18" Cone
Input Connector:	6 Balanced XLR female line level
Input Impedance:	15K Ohms
Input CAL Sensitivity:	+4 dBu
Maximum Continuous Amplifier Power:	700 W into 4 Ohms
High Pass Filter:	5 High pass outputs
High Pass Crossover/Slope:	12 dB/octave -6 dB at 95 Hz
Overload Protection:	Internal Dynamic Filter™ protection
LED Indicators:	Green – Power on, Red - Threshold exceeded
Mains Voltage Requirements:	115V or 230V, auto switched internally
Frequency Response:	±3 dB 8Hz to 60Hz
Low Frequency Limit:	60Hz or 95Hz via switch
Max SPL:	114dB SPL @ 1 meter
Studio Sub 18 Dimensions:	23.5" h x 21.25" w x 18.5" d (60 cm x 54 cm x 47 cm)
Studio Sub 18 Weight:	75 lbs (34 kg)