

AMERI- CANA™

& CANADIANA

ROOFING AND SIDING PANELS



ideal roofing
Company Ltd. Manufacturers

SOLID STEEL STRENGTH




U.S. Edition

AMERI-CANA™ PANEL



SUPERIOR STRENGTH AND VERSATILITY

Ideal Roofing's Ameri-Cana roofing and siding panel offers superior strength **with its strong 80,000 psi full-hard steel core** and its 5 specially-designed 3/4"-high ribs spaced every 9 inches. Superior strength means savings on wood or steel purlins for the builder. Please consult the following load tables.

"OUR RIBS ARE BETTER!"



The ribs on the Ameri-Cana panel are reinforced to better accommodate fasteners. With its symmetrical pattern and ribs with steeper angles, the Ameri-Cana panel is considered the ultimate roofing or siding panel for agricultural, commercial or industrial buildings as well as for residential roofing applications.

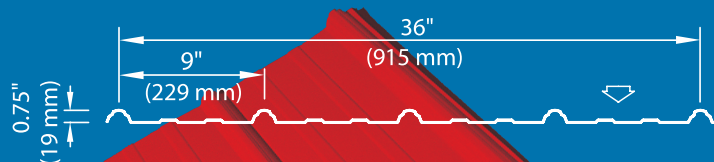

WEATHERTIGHT OVERLAP

Ideal Roofing's Ameri-Cana panel offers maximum protection against leakage with its built-in anti-siphon groove to counter water infiltration resulting from capillary action. This feature makes the Ameri-Cana panel "ideal" for use as a roofing sheet for long and low rafters with a roof pitch as low as 3/12.

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION

(Tested Under ASTM E72-05)

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	304	171	95	67	49	38
26 gauge (.021")	423	237	135	87	63	48




4 COATS OF PROTECTION FOR LONGER LIFE

- 1** ZINC COAT (GALV G-90)
- 2** ZINC PHOSPHATE TREATMENT
- 3** PRIMER COAT
- 4** PERSPECTRA PLUS SERIES™ / WEATHER XL™

40 YEAR LIMITED WARRANTY

YOUR CHOICE OF MATERIAL *APPLICABLE ONLY ON THE AMERI-CANA


GALVANIZED STEEL (MILL FINISH)	GALVALUME PLUS (MILL FINISH)	PRE-PAINTED GALVANIZED STEEL	*ALUMINUM DIAMOND EMBOSSED
ASTM-A653 SS Grade 80, Z275 (G-90); Gauges: 29 (.016" thick) and 26 (.021" thick)	ASTM-A792 SS Grade 80, AZ165; Gauge: 29 (.016" thick)	Perspectra PLUS Series™ / Weather XL™: see color chart; ASTM-A653 SS Grade 80, Z275 (G-90); Gauges: 29 (.016" thick) and 26 (.021" thick)	Gauge: 25 (.0175" thick)

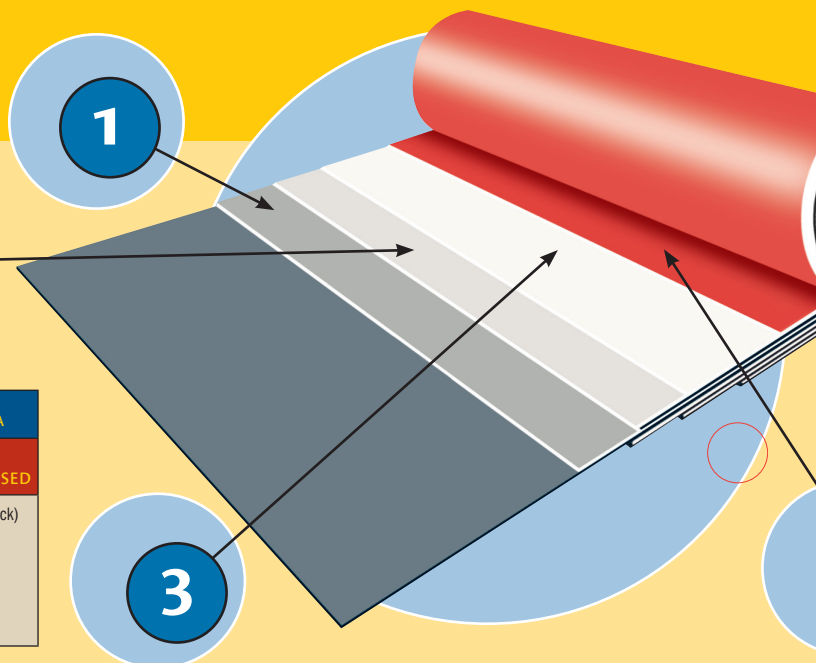

CANADIANA SIDING PANEL


SUPERIOR STRENGTH STEEL SIDING

The Canadiana panel is destined to become the industry's most versatile lightweight steel siding panel with its strong full-hard steel core 80,000 psi and its seven 5/8"-high ribs spaced every 6 inches.



"... COVERS A WIDER AREA"

Economically formed from a 41-in.-wide steel coil to a final 36-in. ribbed sheet, this panel covers a wider area than other siding panels. Consider the aesthetic and structural qualities of our Canadiana steel siding panel for exterior and interior use on agricultural, commercial and industrial buildings.

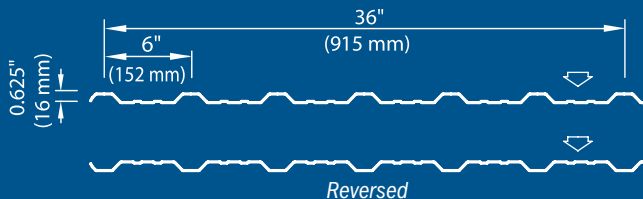

UNIFORMLY DISTRIBUTED LOADS (LBS/FT²) FOR TRIPLE SPAN CONDITION


(Theoretical Data)

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	213	120	77	53	36	24
26 gauge (.021")	321	180	115	80	51	34

Normal Occupancy

	18"	24"	30"	36"	42"	48"
29 gauge (.016")	266	150	97	66	45	30
26 gauge (.021")	401	225	144	100	64	43

Low Human Occupancy (Farm Buildings)

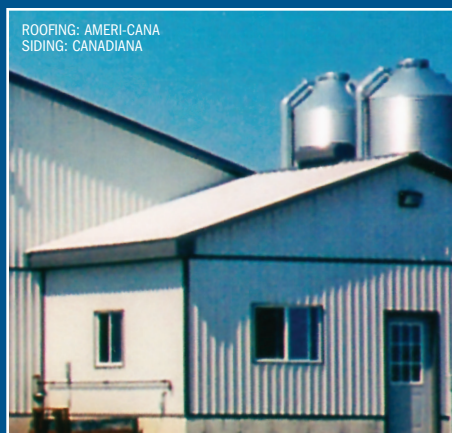

20 ATTRACTIVE COLORS TO ENHANCE YOUR BUILDINGS

Colors not exactly as shown. See color card.




Dark Brown ID 8229



Tile Red ID 8259




Burgundy ID 8011




Polar White ID 8783




Heron Blue ID 8330



White ID 8317



Bone White ID 8273



Antique Linen ID 8696



Tan ID 8315



Stone Grey ID 8305



Regent Grey ID 8730



Bright Red ID 8386



Red ID 8250



Slate Blue ID 8260



Royal Blue ID 8790



Medium Green ID 8329



Forest Green ID 8307



Charcoal ID 8306



Coffee ID 8326




Black ID 8262

TIME AND MONEY SAVERS

Both the Ameri-Cana and Canadiana panels save you time and money! Time because you install wider sheets covering 36-inches that are custom-cut to the inch in lengths measuring up to 40 feet, for your convenience. You save money because the Ameri-Cana and Canadiana panels are made from a 41-in.-wide flat steel sheet with considerably less metal waste than any other high-rib profile.

FLASHINGS, TRIMS, FASTENERS AND ACCESSORIES

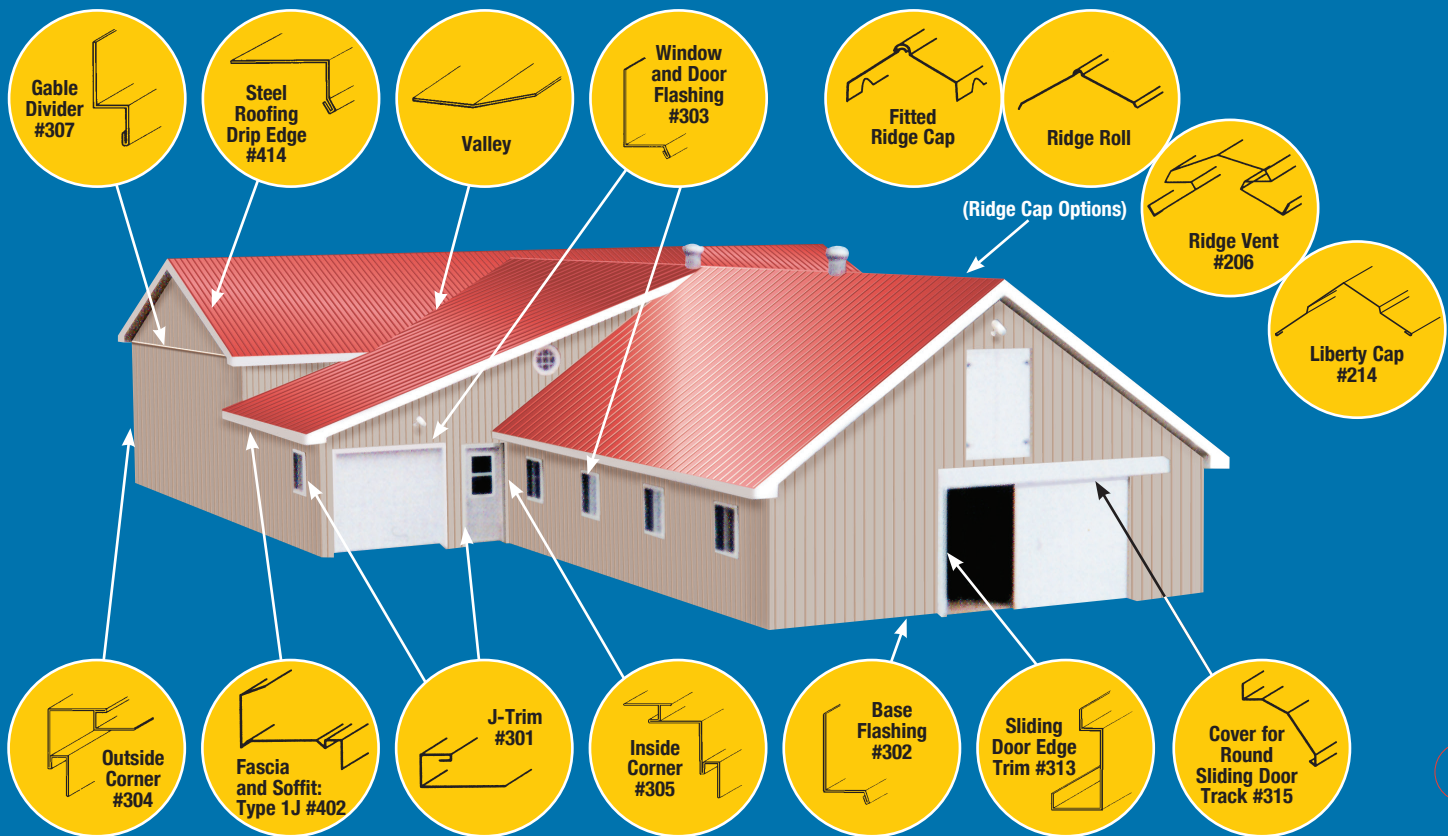

Ideal Guard	Ridge Roll, 10' lengths	Valley 18", 24", 36"	Closure Strip	Ridge Vent, 10' lengths	Fitted Ridge Cap, 6' lengths	Roll Valley Coils, 50' lengths	SNOW DIAMOND
Fitted Wall Flashing	"Z" Bar	"U" Channel	Omega Bar	Touch-up paint	Screw with neoprene washer	#14 Self-drilling screw with 7/16" nylon head	#12-#14 Self-drilling screw with neoprene washer

To add the finishing touch, Ideal Roofing fabricates all its flashing and trims in all colors and materials.

UL 580 (Class 90), Wind Uplift Resistance (check our website for installation details).



Head Office
1418 Michael Street
Ottawa, Ontario, Canada K1B 3R2
www.idealroofing.com

Tel.: 613.746.3206
Toll Free: 1.800.267.0860
Fax: 613.746.0445
info@idealroofing.ca

