


HOWARD

HOWARD ROTAVATOR HR 50 *Special Rotavator for deep tillage and soil stabilization*

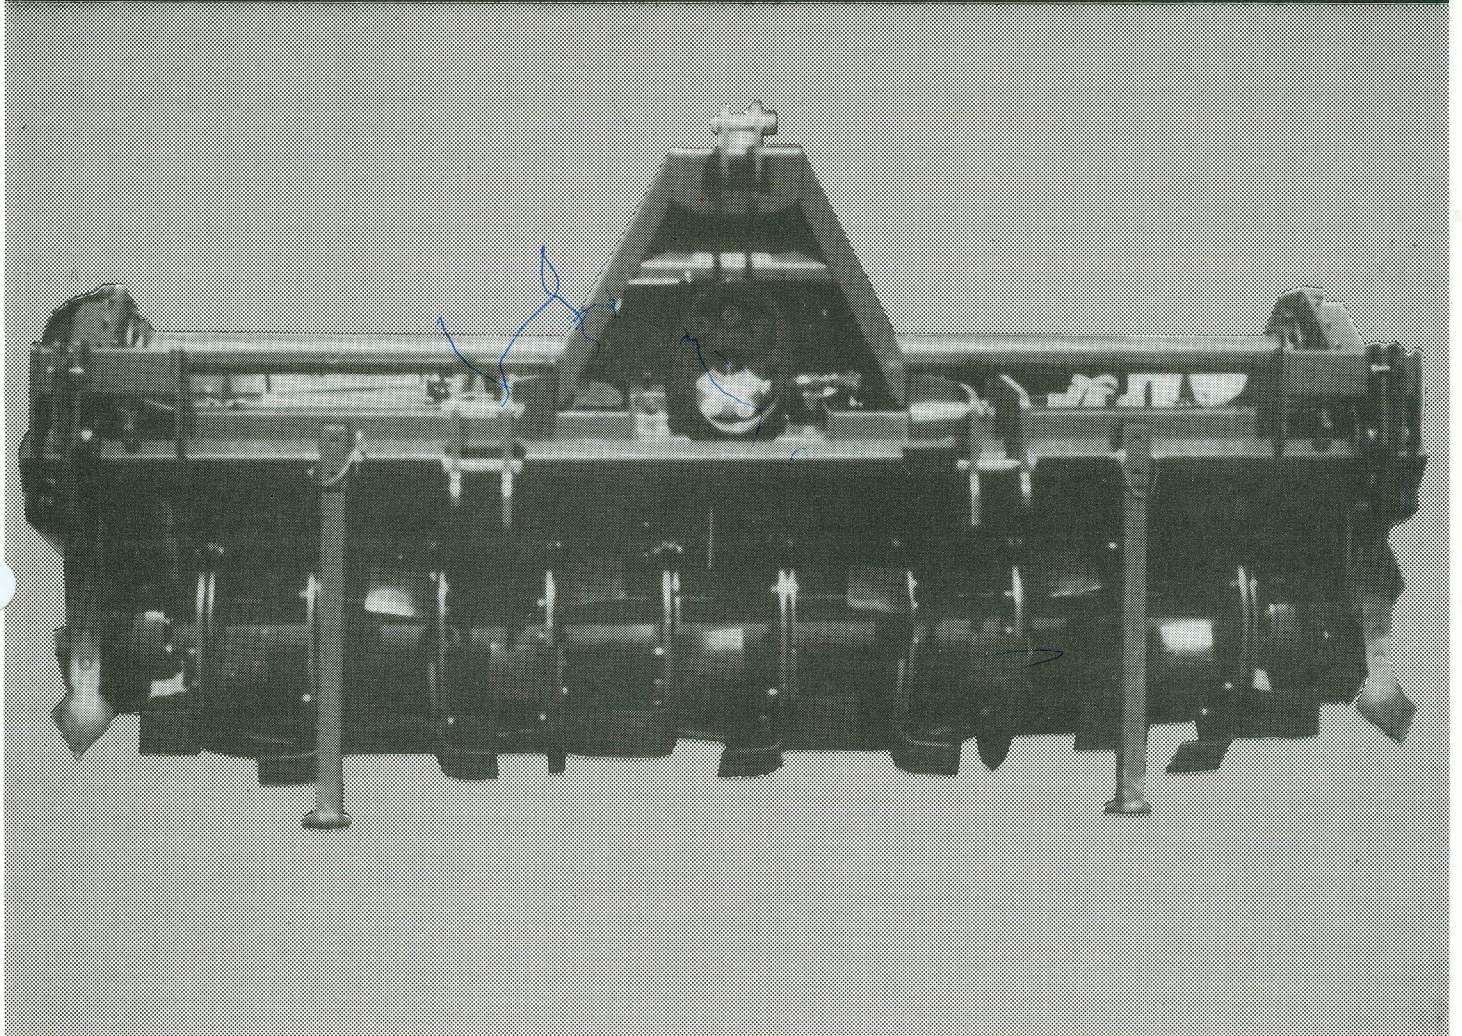


Rotavator HR 50-2,55 m for deep tillage and to mix lime into soils for road preparation, for preparing basements for car parks etc.

Advantages of this machine are the transport width which is below 3,00 m, the low cost in comparison to special construction machinery, low weight, low power consumption, ability to work behind the tractor, low wearing cost because standard agricultural blades can be used.

HOWARD Special ROTAVATOR HR 50

Specifications:

- Three-speed lever change gearbox for 1000 RPM/PTO
- Gearbox with oil cooling system
- Rotor driven from both sides
- special strong Rotor with double tube, super blades and double flanges
- PTO drive line with slip clutch
- Chisel shank mounted in front of the R. H. and L. H. side drive to allow the machine to work deep and to avoid wear on the back plate and on the gear cover.

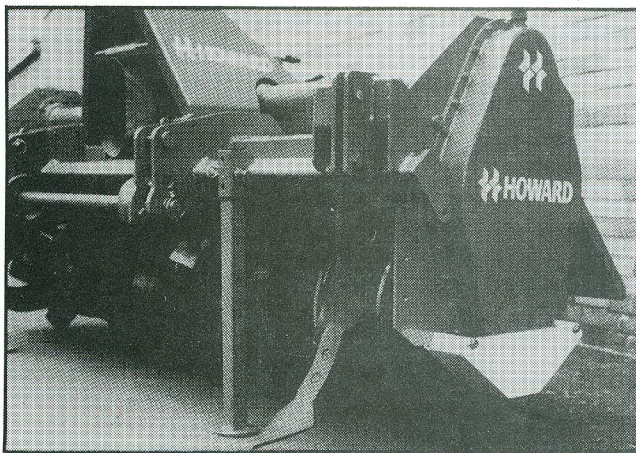

Shank with turnable share



Mixing lime into soil

Options:

- Rear wheels for shallow working

Technical Data:

- | | |
|--|-------------|
| ● Working Width | 100" |
| ● Weight | 3608 lbs |
| ● Max Horse Power | 180 PTO HP |
| ● Rotor Cutting diameter | 29.3" |
| ● Depth of worked area max. | 21.78" |
| ● Approx. working speed depending on depth | 300-800 m/h |



THRIGE AGRO A/S
1434 3rd Street Suite 2-B
Napa California 94559
Telephone: (707) 226-6763

HARRY J. WHELCHER COMPANY
GUY MACHINERY
14213 WASHINGTON ST
WOODSTOCK, IL 60098
(815) 338-0600