


WSA84

- LOW LOSS
- HIGH POWER
- PHASE STABLE
- TRIPLE SHIELDED
- RUGGED NOMEX JACKET



POWeRUN Rugged - Low Loss

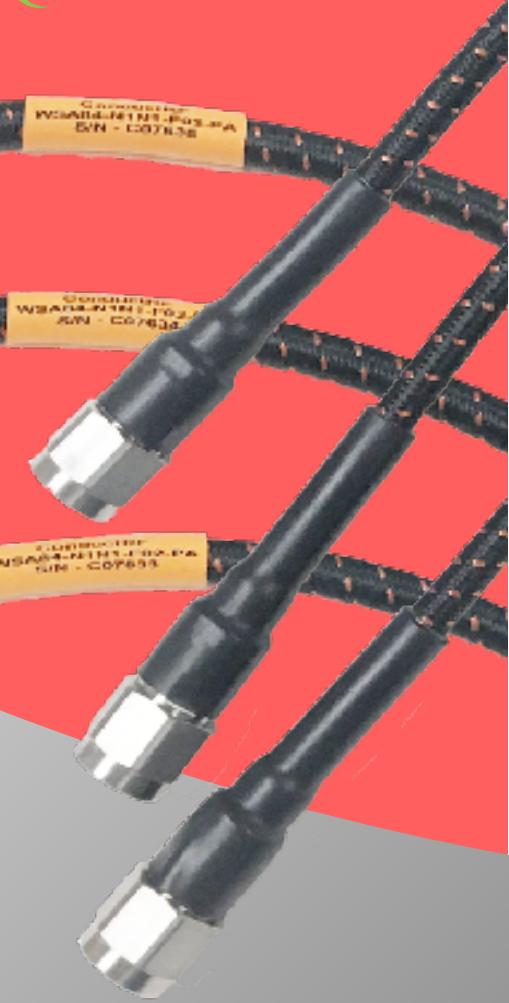

Low Loss, High Power RF Cable Assemblies

For Military & Commercial applications

Versatile Performance Characteristics;

- Phase Stable ± 8 Deg to 18GHz
- Amplitude stable to ± 0.5 dB to 18GHz
- Max Power 345W @ 18GHz
- Flex Life over 5,000 Cycles
- Cable Loss < 0.22 dB/ft @ 18GHz
- VSWR $< 1.35:1$ (Typical $< 1.25:1$)

WSA84-N1N1-F05

WSA84-YYZZ-YYY

Configuration Chart

YYZZ = 18GHz Connector Options

SMA Male = S1
SMA Female = SF
Type-N Male = N1
Type-N Female = NF
TNC Male = T1
TNC Female = TF

YYY = Length Options

FYY = Length in Feet(F06 = 6ft)
SYY = Length in Inches(S18 = 18")
YMY = Length in Meters(2M5 = 2.5m)
CYY = Length in Centimeters(C30 = 30cm)

POWeRUN RF Cables