

 **HOWARD**

**ROTAVATOR HR3**







## Rotavator HR3: strong among the small tillers

Suitable for any application:

- Seed bed preparation
- Fertilizer and stubble incorporation
- Orchard maintenance
- Gardening and landscape applications

Its low power demand provides an efficient work with tractors from 12 to 20 HP

The machine is able to work up to 7" providing a fine tilth and an even finish of the work





The trailing board's shape is specially designed for a perfect finish and an even flow of the soil



The four blade rotor works in hard conditions with a low power requirement.



Very easy control depth set with the adjustable skids

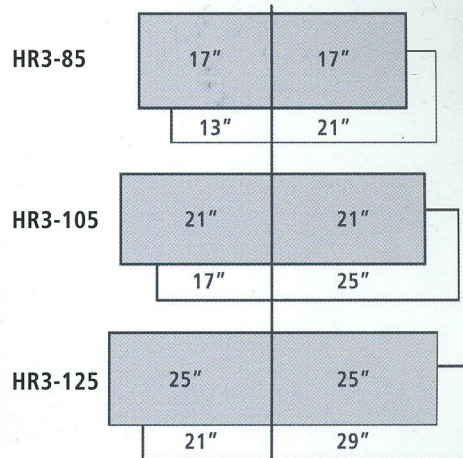

The machine can be center or offset mounted thanks to the moveable lower brackets.


## ROTAVATOR HR 3

Model	working width in	total width in	Weight lbs	Number of blades	Power range	Rotor speed rpm
HR3-30	34	40	290	16	12-16	230
HR3-40	42	48	320	20	14-18	
HR3-50	50	56	350	24	16-20	

### SPECIFICATIONS

- Four blades per flange type 9941/9942
- Single speed gearbox
- Mobile mounting brackets
- 3 point linkage cat 0 and 1
- 1" chain side drive
- Adjustable skids for depth control
- Pto drive shaft with clutch

### OPTIONAL EQUIPMENT



**HOWARD ROTAVATOR**  
**GUY MACHINERY**  
 14213 WASHINGTON ST.  
 IL. HWY 120 WEST  
 WOODSTOCK, IL 60098  
 (815) 338-0600

HOWARD IBERICA, S.A. Ctra. Granollers a Girona, Km 1,5 08400 GRANOLLERS (SPAIN) Tel. +34 93 8617150 Fax. +34 93 8493577

HOWARD, is committed to constantly improving its products and may modify the characteristics and measure stated herein without prior warning.