

SOF₂O Series[®]

Clear Defender

Clear Defender-100 Series Multimedia Filter

Clear Water
Saves You
Money



Save

With increased water heater efficiency.
On soap for kitchen, bath, and laundry.
On shampoo, conditioners, and lotions.
With less plumbing repairs and supplies.
On household cleaning time.

Benefits:

- Effective, Efficient, and Eco-Friendly.
- Reduces Iron and Manganese in your water.
- Reduces objectionable smells (hydrogen sulfide).
- Cleaner, better tasting water from every tap, faucet, and water-using appliance.
- Increases the life of your plumbing fixtures, and water using appliances.
- Reduces staining of fixtures, clothing, and hair.

System Features:

- **High Flow System** is ideal for supplying more water with less pressure loss.
- **Permanent System Memory** with no battery needed or required during power outage.
- **Solid State Controller** provides detailed diagnostics like total gallons, average daily use, flow rate, and is easily programmed to match your family's water needs.
- **Fewer Moving Parts** means easy maintenance.
- **Safe Low Voltage Power** uses less than a penny a day in electricity.
- May be used in conjunction with chemical and air injection.




Specialty Water Systems
609 Stafford Lane North, Dundas, MN 55019
Phone (507) 645-6076 • Fax (507) 645-4007
www.SOF2O.com • Info@MidwestWater.com

Clear Defender-100 Series Multimedia Filter

(D)	100EDMMF100	100EDMMF150	100EDMMF200	100EDMMF250
Multimedia Media	1.0	1.5	2.0	2.5
Backwash Drain Flow	5	5	6.5	7.5
Service Flow (b)	5	7	10	13
Water Hardness Range GPG	NA	NA	NA	NA
Maximum Iron (ppm) (a)	5	7	10	10
Water Pressure Min/Max PSI	25-100	25-100	25-100	25-100
Min/Max Water Temp Range F	40°-100°	40°-100°	40°-100°	40°-100°
Electrical Requirement (Volt/Hz)	110-50/60	110-50/60	110-50/60	110-50/60
Plumbing Options	3/4"-1"	3/4"-1"	3/4"-1"	3/4"-1"

- (a) Iron reduction will vary depending on type of iron, pH, and other local conditions.
- (b) Continuous operation at flow rates greater than the maximum Service Flow rate may affect capacity and efficiency performance.
- (c) All specifications and performance ranges are subject to change without notice.
- (d) Unit requires retention tank and/or chemical injection (see separate literature for details).

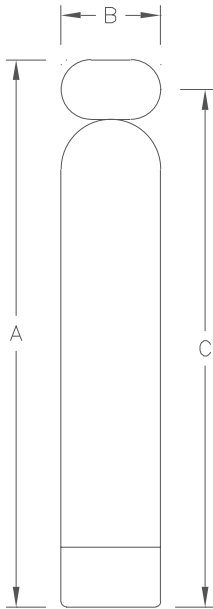

WARRANTY

1 Year on Complete Unit
3 Years on Electrical Parts
5 Years on Valve Body and Internals
10 Years on Resin Tank

See Owners Manual For Specific Conditions

System DIMENSIONS

Model	A	B	C
100	56	10	49
150	62	10	56
200	60	12	54
250	62	13	56

